

mAntra



David Villalba

EN_

Mantra works with a very diverse team of freelance designers, specialized in different branches of design.

They are a group of highly qualified professionals experience in the lighting sector, who contribute with original solutions in the development of new concepts; they also participate actively in the whole product development process, from the initial draft to the last finishing details

This wide variety of styles that our designers offer have a direct impact on our catalogues, which are made up of ideas that are adapted to any type of lighting need.

Besides, we take pride in having a great relationship with them, which goes beyond the professional link. We truly rely on their capability and work methods, which have provided, such innovative and stylish collections so far.

FR_

Mantra collabore avec une équipe de dessinateurs externes très diverse, spécialisés dans différentes branches dans le monde du design.

Des professionnels avec une grande expérience dans le secteur de l'éclairage, qui apportent des solutions innovatrices au développement de nouveaux concepts, et participent dans tous les processus de fabrication du produit, depuis le brouillon jusqu'à la conception du produit final.

Cette grande variété de styles influence directement notre catalogue, qui est composé de solutions qui s'adaptent à tous les styles ou besoins dans le monde de l'éclairage.

Notre relation avec l'équipe de designers va plus loin que le contact professionnel, nous avons confiance sur leur savoir-faire, et leur méthodes de travail qui nous apporte fraîcheur et innovation, pour chacune de nos collections.

JW design



Carlos Santolaria



Wilfried Buelacher



Jackie Luo



José Ignacio Ballester



Santiago Sevillano

ITL_

Mantra collabora con un team di designer esterni molto diversi, specializzati in varie branche nel mondo del design.

Professionisti con esperienza nel settore dell'illuminazione che forniscono soluzioni innovative nello sviluppo di nuovi concetti, partecipando a tutti i processi di sviluppo del prodotto, dallo schizzo iniziale alla concezione del prodotto finale.

Questa ampia varietà di stili che ci offre influisce direttamente sul nostro catalogo, che è composto da soluzioni che si adattano a qualsiasi tipo di stile o esigenza nel mondo dell'illuminazione.

Il nostro trattamento con i designer va oltre un semplice trattamento professionale, confidiamo pienamente nel loro buon lavoro e nei loro metodi di lavoro che ci danno freschezza e innovazione in ciascuna delle nostre collezioni.



Hugo Tejada

ESP_

Mantra colabora con un equipo de diseñadores externos muy diverso, especializados en diversas ramas dentro del mundo del diseño.

Profesionales con experiencia en el sector de la iluminación que aportan soluciones novedosas en el desarrollo de nuevos conceptos, participando en todos los procesos de desarrollo del producto, desde el boceto inicial hasta la concepción del producto final.

Esta gran variedad de estilos que nos ofrecen incide directamente en nuestro catálogo, el cual está compuesto por soluciones que se adaptan a cualquier tipo de estilo o necesidad dentro del mundo de la iluminación.

Nuestro trato con los diseñadores va más allá de un mero trato profesional, confiamos plenamente en su buen hacer y en sus métodos de trabajo que nos aporta frescura e innovación en cada una de nuestras colecciones.

INTERIOR/INDOOR

Aplique/Wall light

New



ALTEA	ASIMETRIC	BOAVISTA	BORA BORA	CAÍCOS	CAYMAN	DURBAN
26	50	64	76	74	62	46




EYES	FUJI	FUERTEVENTURA	GOA	GOCOVA	HANOK	IOS
42	20	54	40	66	30	184



KUBICK	LUPPI	MORNE	MURAL	NELSON	ORION	PARACURU
36	34	48	82	18	22	84




PREA	SAL	TAHITI XL	TARIFA	TARIFA II	TORONTO	TOBAGO
72	58	24	70	68	16	28

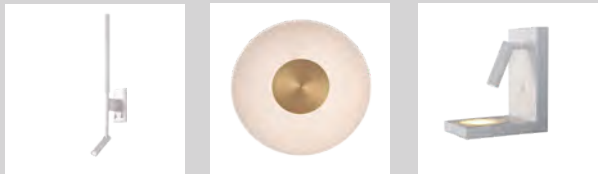

TORCH	VENUS	ZANZIBAR
56	44	52

INTERIOR/INDOOR

Plafón/Ceiling

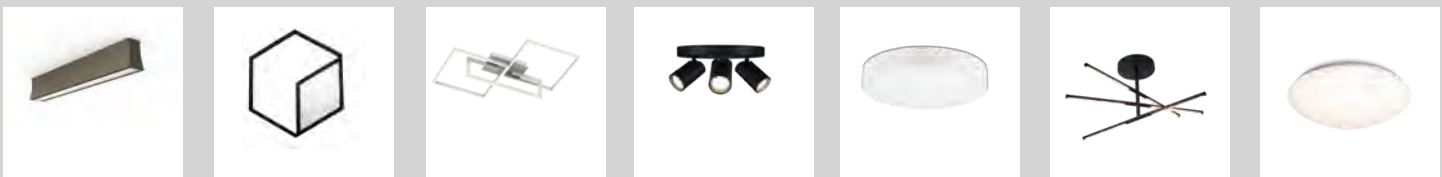


HANOK	KUBICK	MURAL	SAL	SAONA SUPERFICIE	TORCH	ZERO E27
88	38	94	90	98	92	96


Colgante/Pendant



ARUBA	BOLONIA	CLIFTON	FLORÓN EMPOTRABLE	GRUISSAN	GRUISSAN	GRUISSAN
150	106	122	152	108	110	112

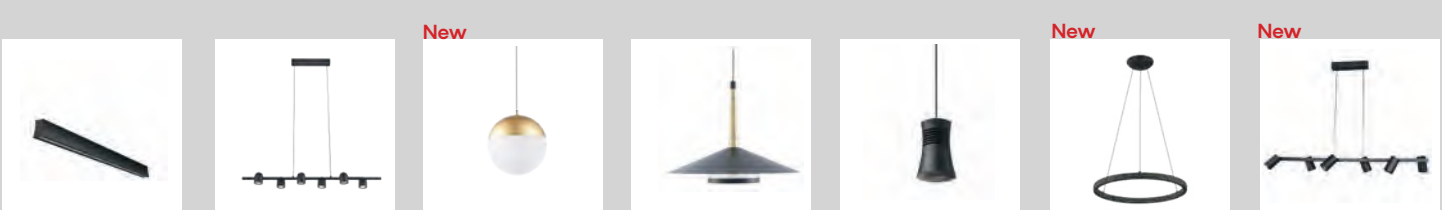

HANOK	IOS	KILDA	ORION	PAGODA	RIUMAR	SAL
126	124	114	138	134	102	120

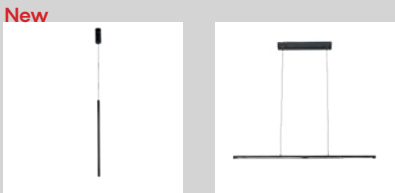

TORCH	TORCH
118	148

INTERIOR/INDOOR

Sobremesa/Table lamp



EYES 160
MURAL 164
SAL 156
TORCH 162

Pie de salón/Floor lamp



EYES 170
MURAL 174
NASSAU 166
SAL 168
TORCH 172

Foco Superficie/Spotlight



ARUBA 188
ARUBA 190
COLUMBRETES 192
GLACIAR 182
GOWER 186
IOS 184
MAGNETO 48W 200



MAGNETO 48W 202
MAGNETO 48W 204
MAGNETO 48W 206
MAGNETO 48W 210
SAL 180
SPLIT 178


Carril trifásico/Triphasic rail



ARUBA 236
CARRILES-TRACKS 246
CRETA 224
FIJI 240
ÍPSILON 230
ITACA 228
PAGODA 232
SAL 238

INTERIOR/INDOOR

Empotrable/Recessed

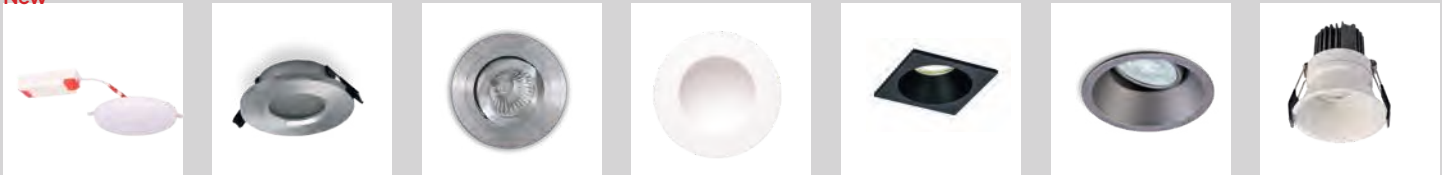

ALGARVE 256
ATLANTIS 314
BÁSICO GU10 292
CABRERA 258
COMFORT IP 315
COMFORT GU10 296
FORMENTERA 276



GARDA 280
GUINCHO 304
GUINCHO GU10 290
GRACIOSA 265
HURGADA 302
KIEL 308
LAGOS 288



LAMBORJINI 298
LANCES 286
MEDANO 264
METACRILATO 306
NEPTUNO 282
PANAMA 274
ROMBOK 300



SAL 284
SAONA 260
SAONA 262
SUNSET 270
TAVIRA 310
TRIMASI 266

Campanas Led/Ufo bays Led



URANO 340
URANO 344




Tiras Led/Strip Leds



DRIVERS 329
PERFILES 322
SISTEMAS CONTROL 332
SKYLINE 338
TIRAS LED 318

Apliques

Wall lights




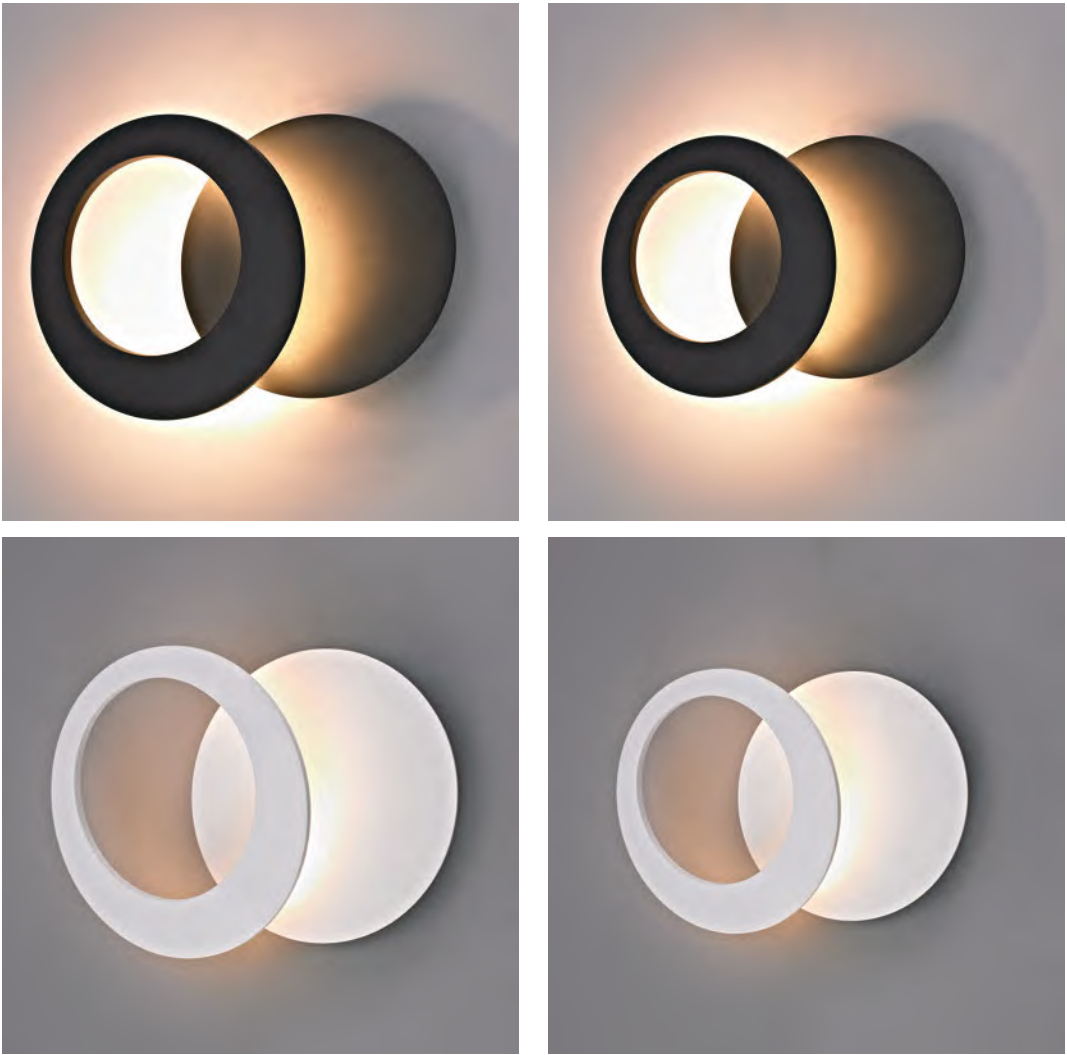


65.90€

85.60€

REFERENCE	K	LED WATT	LUMENS	FINISH
8461	3000K	10W	820lm	Blanco mate-Matt white
8462	3000K	10W	820lm	Negro mate-Matt black
8463	3000K	15W	1200lm	Blanco mate-Matt white
8464	3000K	15W	1200lm	Negro mate-Matt black
220-240V ~50/60Hz CRI≥ 80				Aluminio-Aluminium



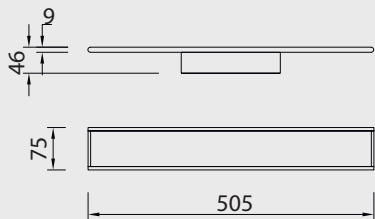

☐ CCT SWITCH
2700K-3200K-4000K



2700K



CCT SWITCH
3200K




4000K



REFERENCE	CCT switch	LED WATT	LUMENS	FINISH
8494	2700K-3200K-4000K	16 W	1300lm	Blanco-White
8496	2700K-3200K-4000K	16 W	1300lm	Negro-Black
8495	2700K-3200K-4000K	24 W	1950lm	Blanco-White
8497	2700K-3200K-4000K	24 W	1950lm	Negro-Black
220-240V ~ 50/60Hz CRI: ≥ 80				Aluminio-Aluminium

68.40

92.90

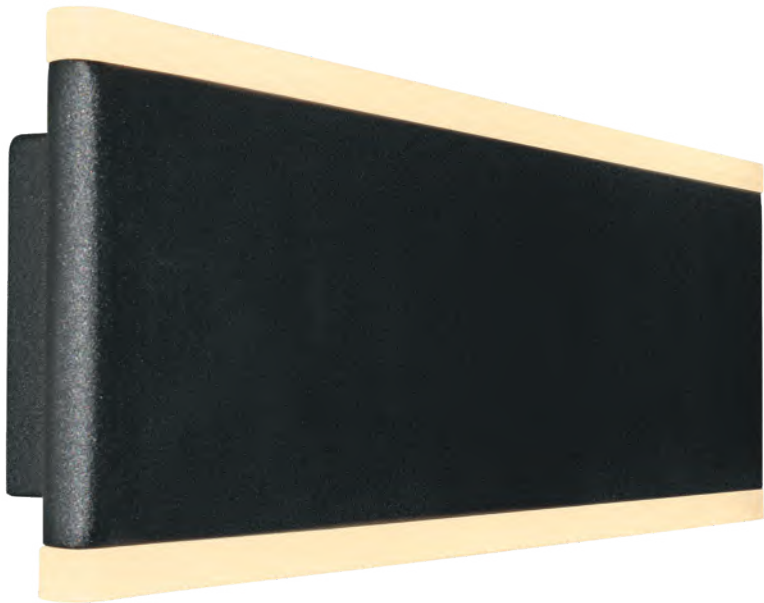


FUJI


by José Ignacio Ballester



14W



10W




48.70

64.30€

REFERENCE	K	LED WATT	LUMENS	FINISH
8156	3000K	10W	920lm	Blanco-White
8157	3000K	10W	920lm	Negro-Black
8158	3000K	14W	1250lm	Blanco-White
8159	3000K	14W	1250lm	Negro-Black
220-240V ~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium




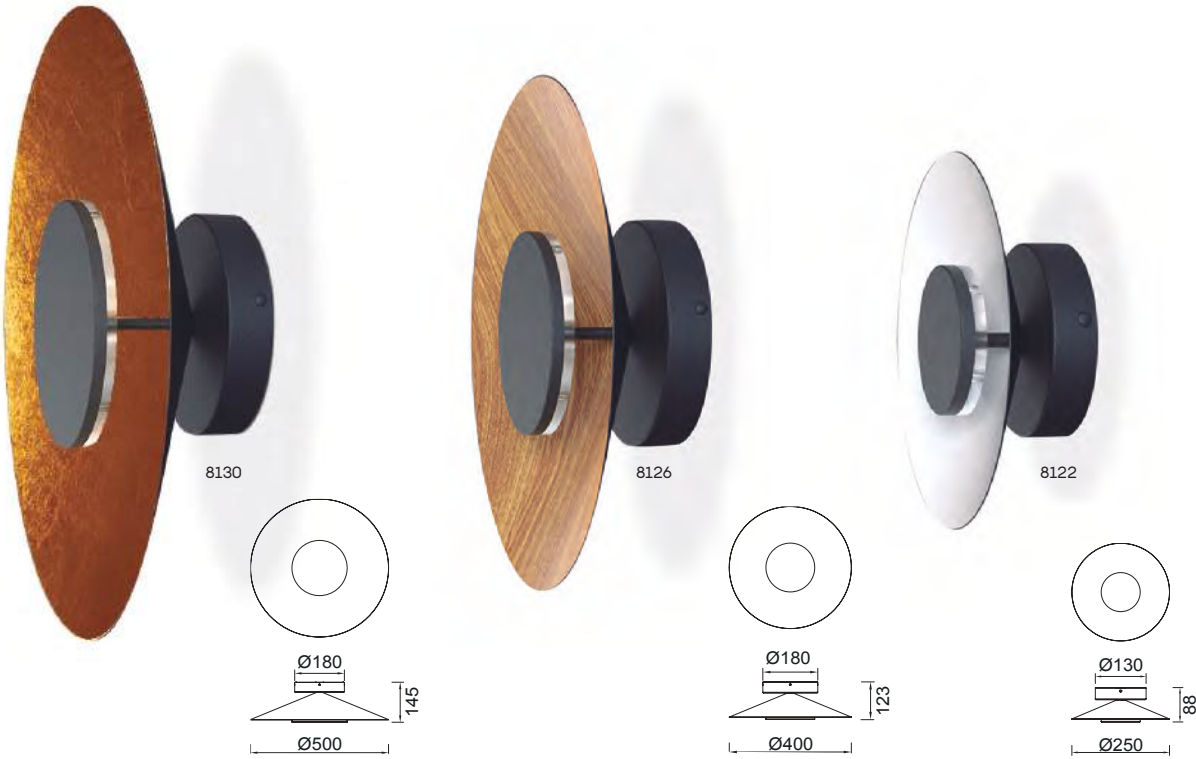

REFERENCE	K	LED WATT	LUMENS	FINISH	SIZES
8122	3000K	8W	560lm	Negro+blanco-Black+white	ø250
8123	3000K	8W	560lm	Negro+Madera-Black+Wood	ø250
8124	3000K	8W	560lm	Negro+Pan oro-Black+Gold leaf	ø250
8125	3000K	20W	1400lm	Negro+blanco-Black+white	ø400
8126	3000K	20W	1400lm	Negro+Madera-Black+Wood	ø400
8127	3000K	20W	1400lm	Negro+Pan oro-Black+Gold leaf	ø400
8128	3000K	24W	1680lm	Negro+blanco-Black+white	ø500
8129	3000K	24W	1680lm	Negro+Madera-Black+Wood	ø500
8130	3000K	24W	1680lm	Negro+Pan oro-Black+Gold leaf	ø500


220-240V~ 50/60Hz CRI ≥80

Hierro/Acrílico-Iron/Acrylic



7475
pág. 138-146




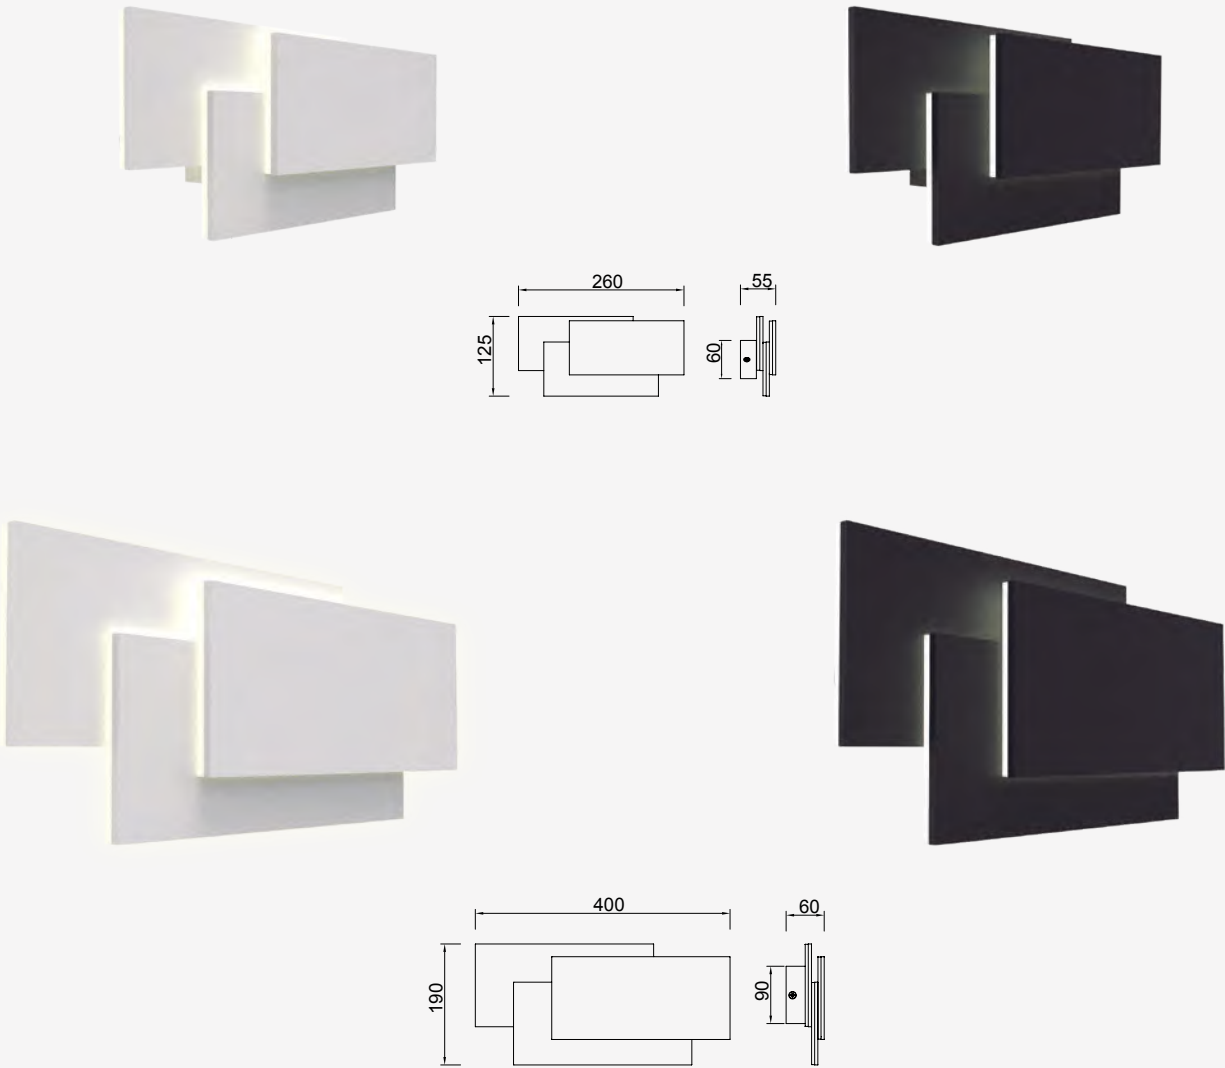


75

115.20€

REFERENCE	K	LED WATT	LUMENS	FINISH
8089	3000K	12 W	1080lm	Blanco-White
8090	3000K	12 W	1080lm	Negro-Black
8087	3000K	36 W	3240lm	Blanco-White
8088	3000K	36 W	3240lm	Negro-Black
		220-240V~ 50/60Hz CRI:≥ 80		Aluminio/Acrílico-Aluminium/Acrylic



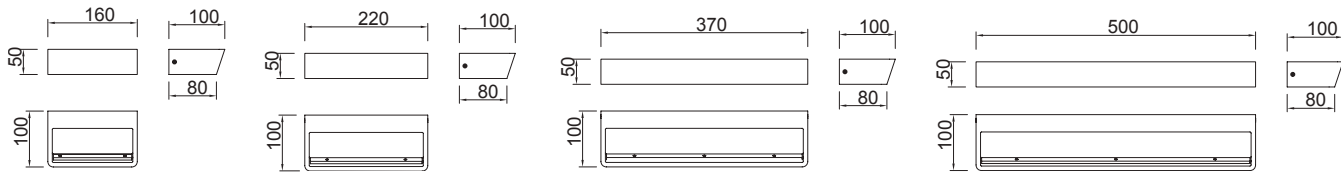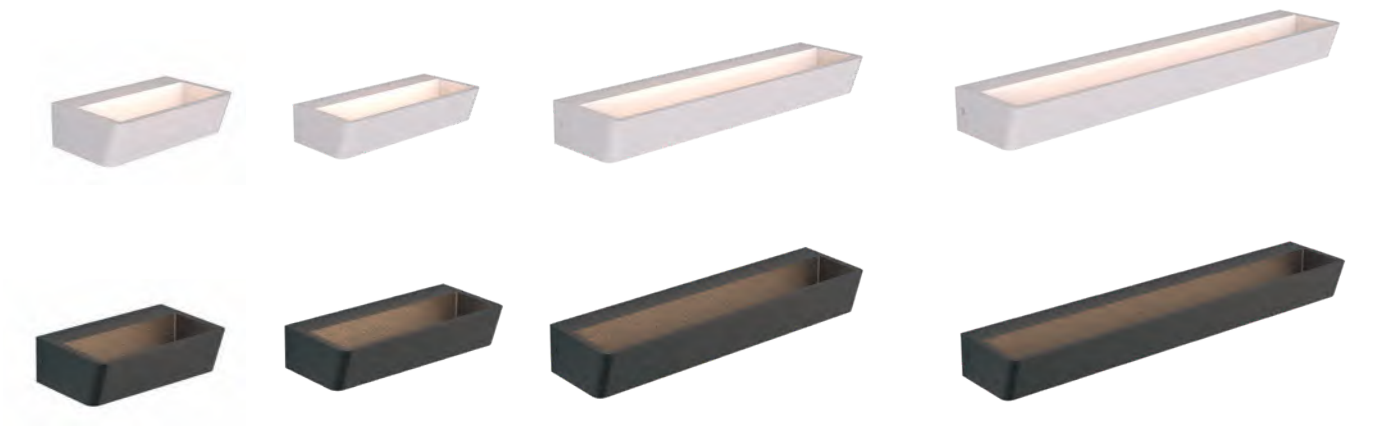



41.20

54.40

85.20

	REFERENCE	K	LED WATT	LUMENS	FINISH
New	8094	3000K	15W	1200lm	Blanco arena-Sand white
	8367	3000K	15W	1200lm	Negro arena-Sand black
	8098	4000K	15W	1275lm	Blanco arena-Sand white
New	8093	3000K	21W	1680lm	Blanco arena-Sand white
	8368	3000K	21W	1680lm	Negro arena-Sand black
	8097	4000K	21W	1785lm	Blanco arena-Sand white
New	8092	3000K	30W	2400lm	Blanco arena-Sand white
	8369	3000K	30W	2400lm	Negro arena-Sand black
	8096	4000K	30W	2550lm	Blanco arena-Sand white
New	8091	3000K	40W	3200lm	Blanco arena-Sand white
	8370	3000K	40W	3200lm	Negro arena-Sand black
	8095	4000K	40W	3400lm	Blanco arena-Sand white
			220-240V~ 50/60Hz CRI:≥ 80		
			Aluminio/Acrílico-Aluminium/Acrylic		

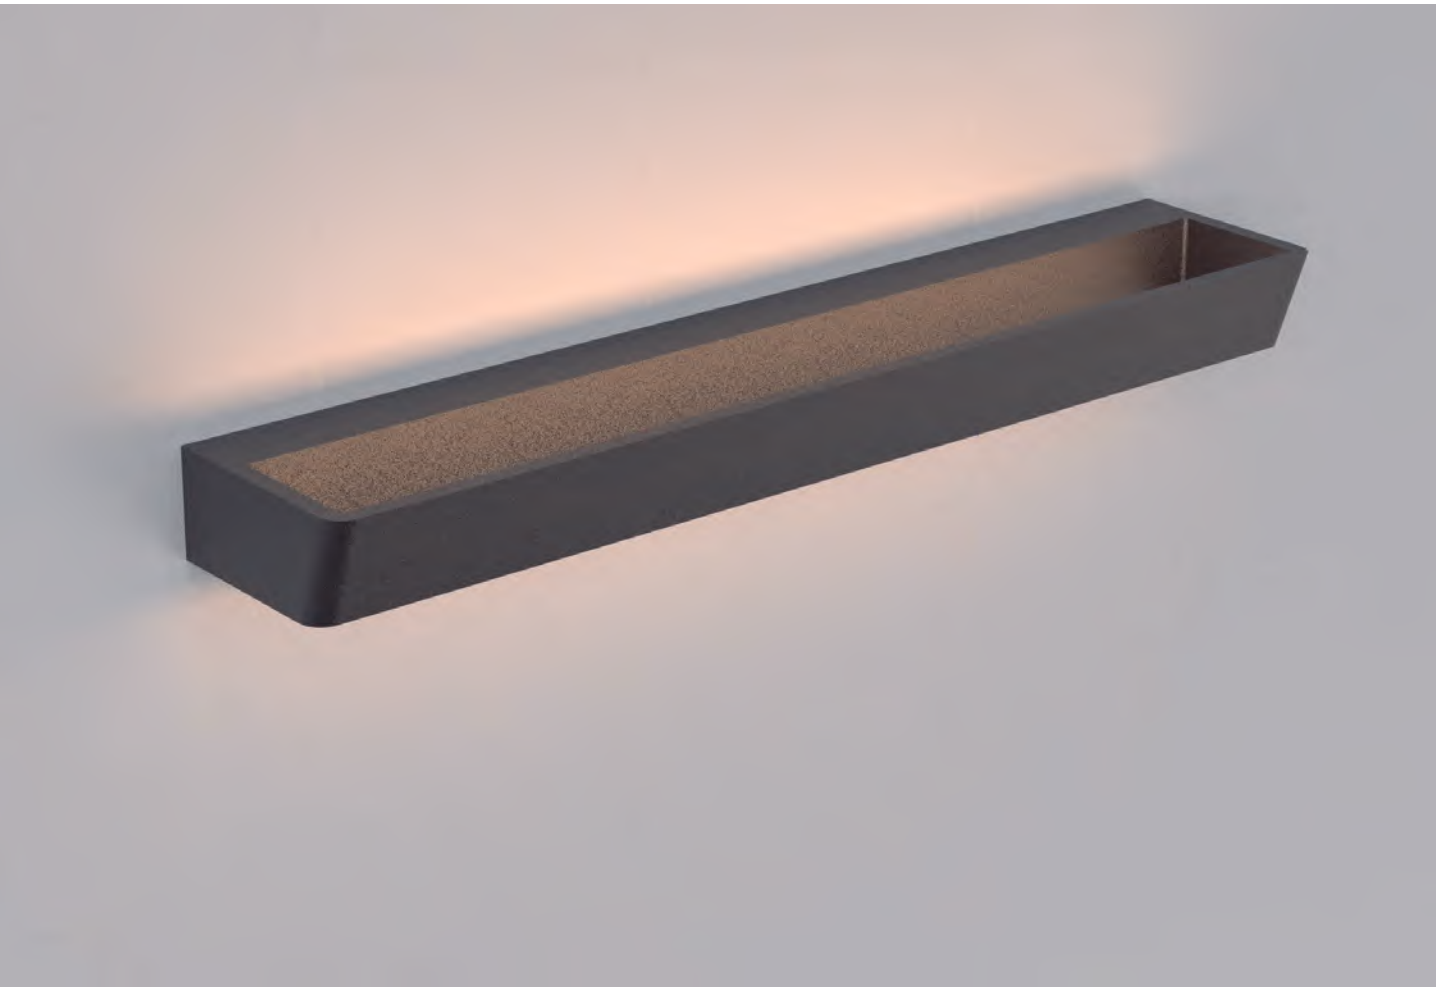

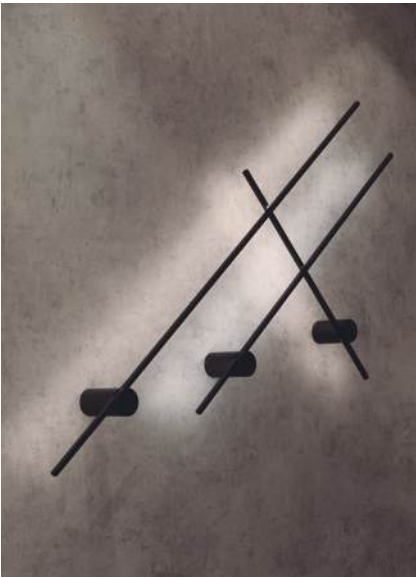


58

71.30

85.60

	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7865	3000K	7W	590lm	Oro-Gold
	7910	3000K	7W	590lm	Blanco-White
	7913	3000K	7W	590lm	Negro-Black
New	7866	3000K	9W	760lm	Oro-Gold
	7911	3000K	9W	760lm	Blanco-White
	7914	3000K	9W	760lm	Negro-Black
New	7867	3000K	12W	1010lm	Oro-Gold
	7912	3000K	12W	1010lm	Blanco-White
	7915	3000K	12W	1010lm	Negro-Black
	220-240V~ 50/60Hz CRI:≥ 90				Aluminio-Aluminium

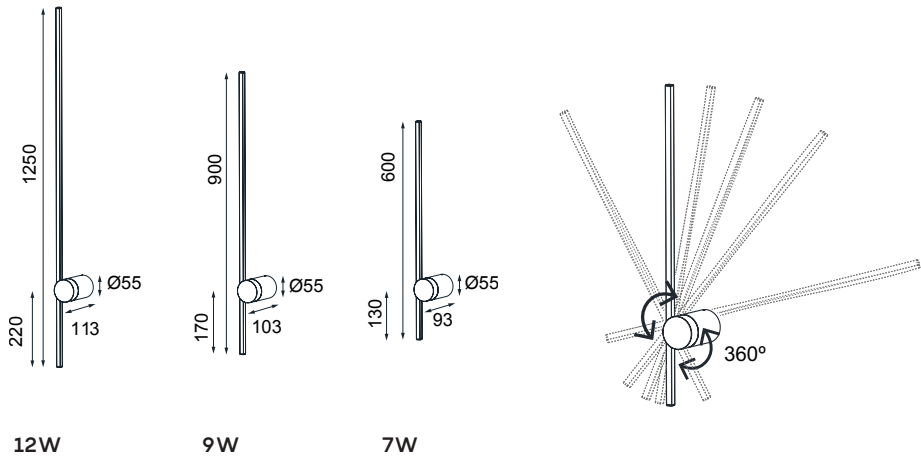

CRI≥90


CRI≥90

HANOK

by David Villalba


Apliques - Wall lights

Indoor

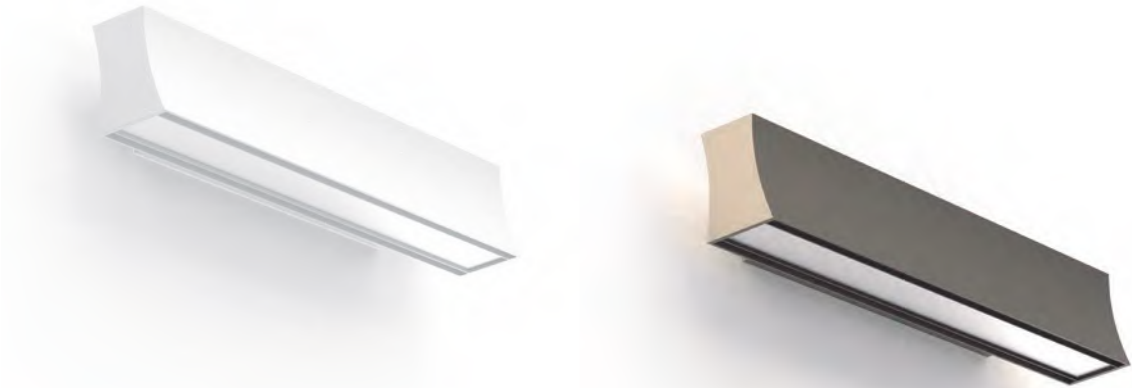


79.70

REFERENCE	K	LED WATT	LUMENS	FINISH
7774	3000K	14W	950lm	Blanco-White
7776	3000K	14W	950lm	Negro-Black
7778	3000K	14W	950lm	Arena-Sabbia
7775	4000K	14W	1000lm	Blanco-White
7777	4000K	14W	1000lm	Negro-Black
220-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium

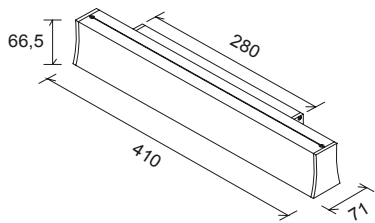


3000K 14W

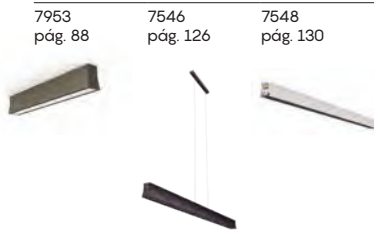


4000K 14W


Luminous Intensity Distribution Curve

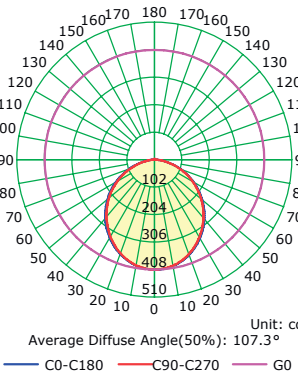


The Average Illuminance Effective Figure



Luminous Intensity Distribution Curve

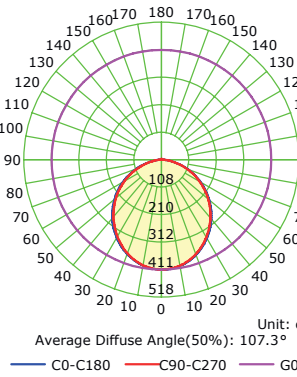




The Average Illuminance Effective Figure






114.60€


REFERENCE	K	LED WATT	LUMENS	FINISH
7770	3000K	38W	2850lm	Blanco-White
7772	3000K	38W	2850lm	Negro-Black
7771	4000K	38W	3000lm	Blanco-White
7773	4000K	38W	3000lm	Negro-Black
220-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium

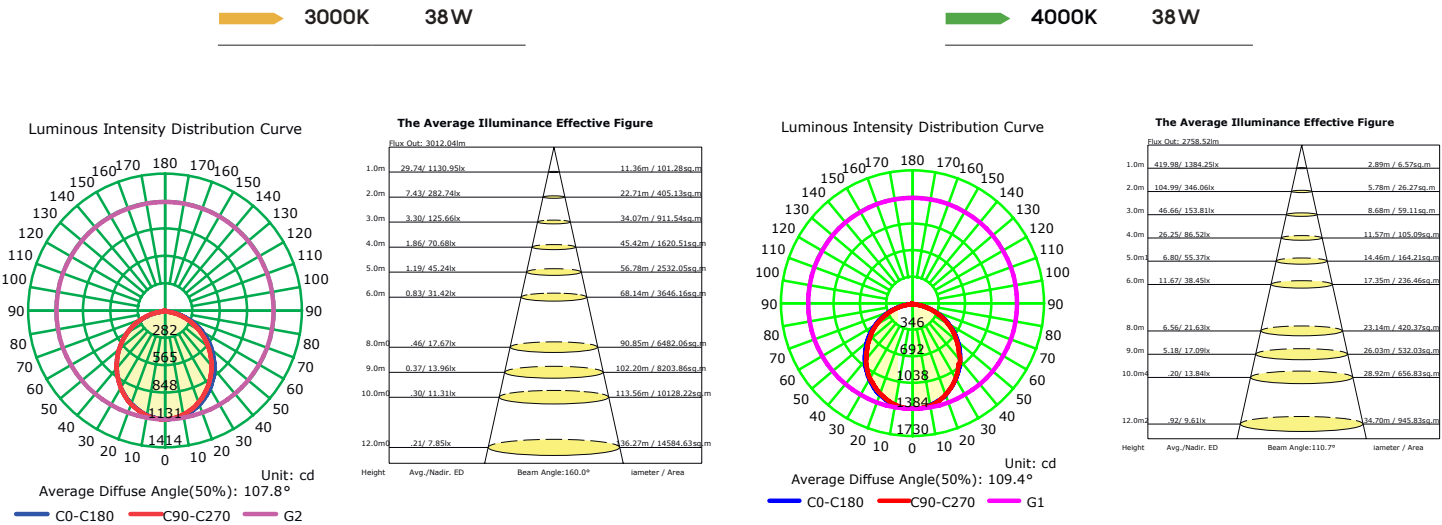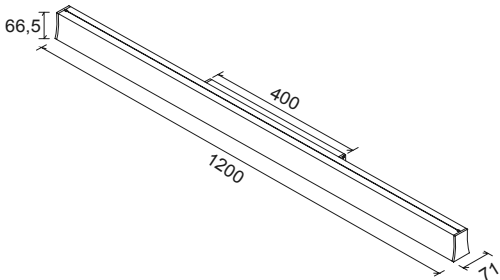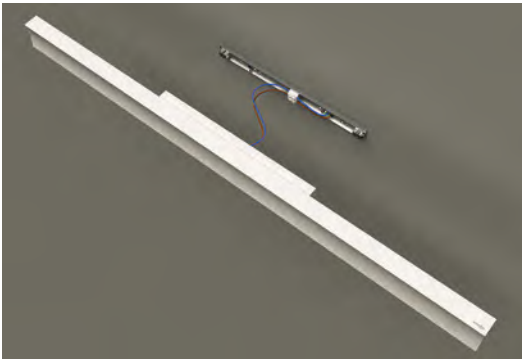

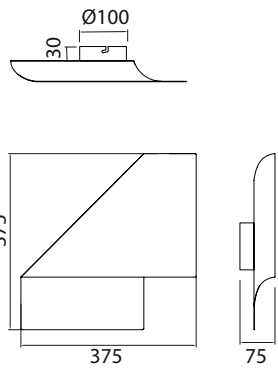

46.80

REFERENCE	BULB (No incl)	FINISH
7693	1L x GX53	Blanco-White
7694	1L x GX53	Negro-Black
7695	1L x GX53	Arena-Sabbia
máx. 15W LED (No incl)		100-240V ~ 50/60Hz Metal-Metal




Bombillas recomendadas-Suggested bulbs

REFERENCE	Wattios LED	K	Lumens	Ángulo luz
R09224	9W	3000K	730lm	120°
R09225	9W	4000K	740lm	120°
R09248	12W	3000K	930lm	120°
R09249	12W	4000K	960lm	120°



KUBICK
by José Ignacio Ballester

Indoor




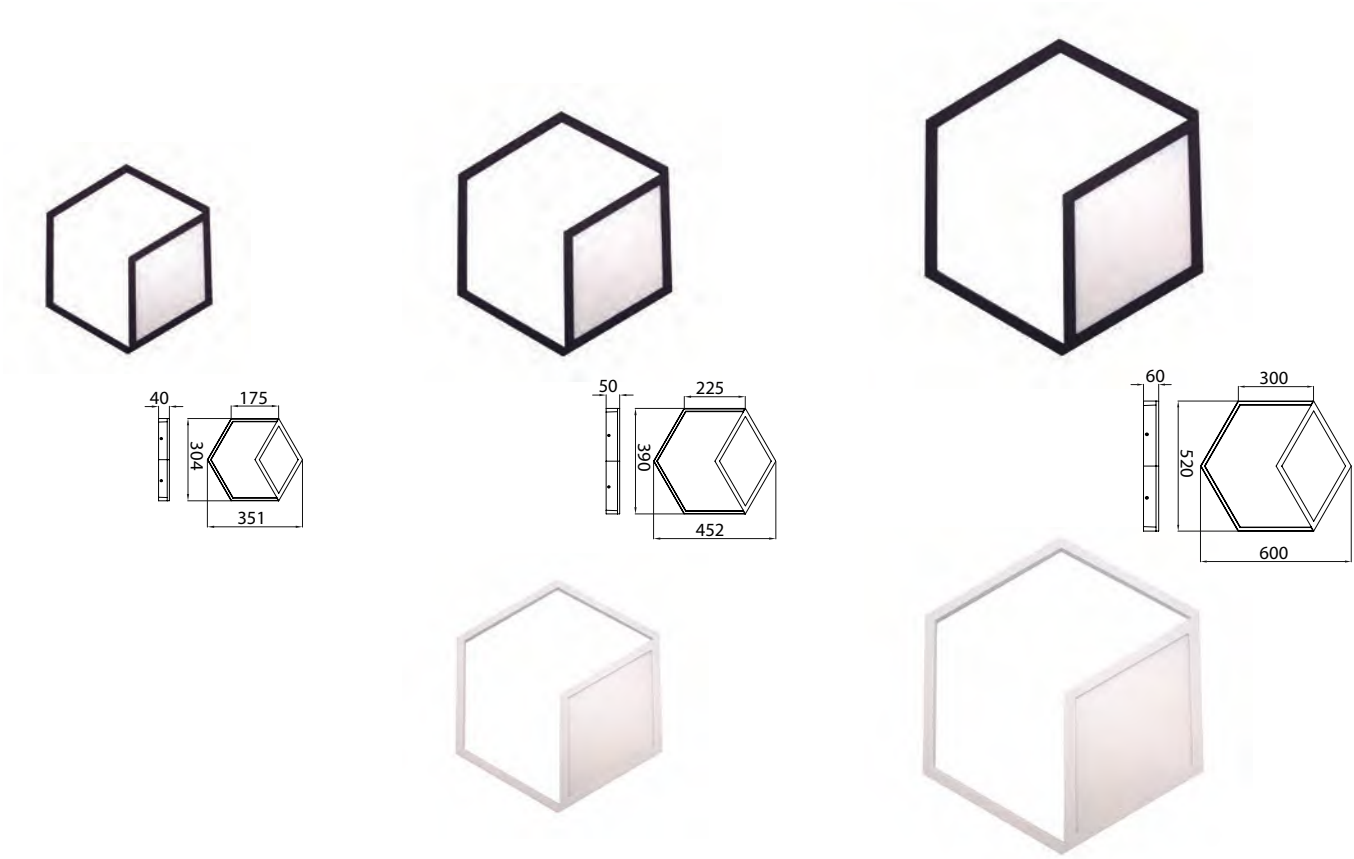


	REFERENCE	K	LED WATT	LUMENS	FINISH	
27.20	7592	3000K	12W +14W	1630lm	Negro mate-Matt black	On-off
	7593	3000K	12W +14W	1630lm	Negro mate-Matt black	Dimmable 
37.90	7594	3000K	13,5W + 20W	1870lm	Blanco mate-Matt white	On-off
	7596	3000K	13,5W + 20W	1870lm	Negro mate-Matt black	On-off
	7595	3000K	13,5W + 20W	1870lm	Blanco mate-Matt white	Dimmable 
53.80	7597	3000K	13,5W + 20W	1870lm	Negro mate-Matt black	Dimmable 
	7760	3000K	18W+30W	2700lm	Blanco mate-Matt white	On-off
60.50	7762	3000K	18W+30W	2700lm	Negro mate-Matt black	On-off
	7761	3000K	18W+30W	2700lm	Blanco mate-Matt white	Dimmable 
	7763	3000K	18W+30W	2700lm	Negro mate-Matt black	Dimmable 
220-240V~50/60Hz CRI:≥ 80					Aluminio-Aluminium	



KUBICK

by José Ignacio Ballester

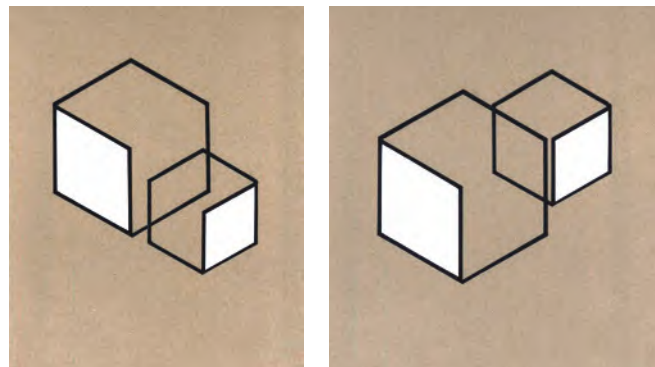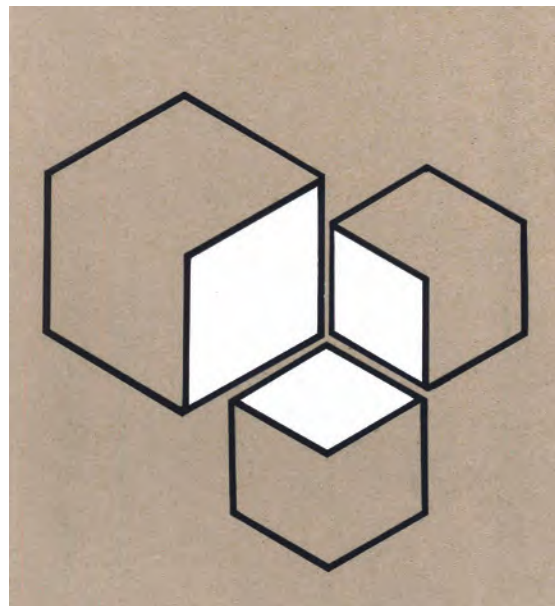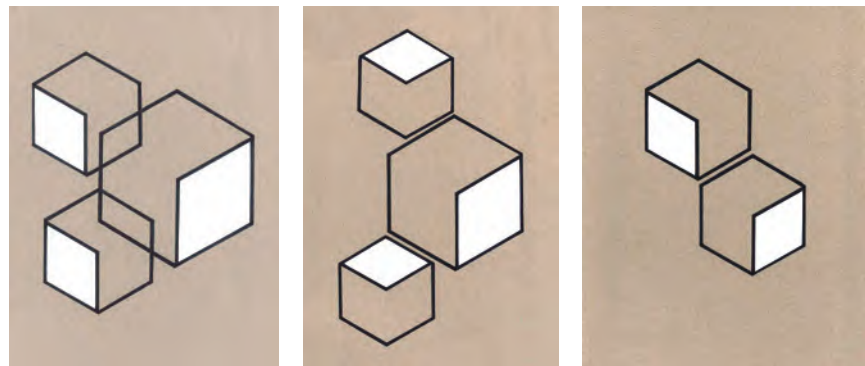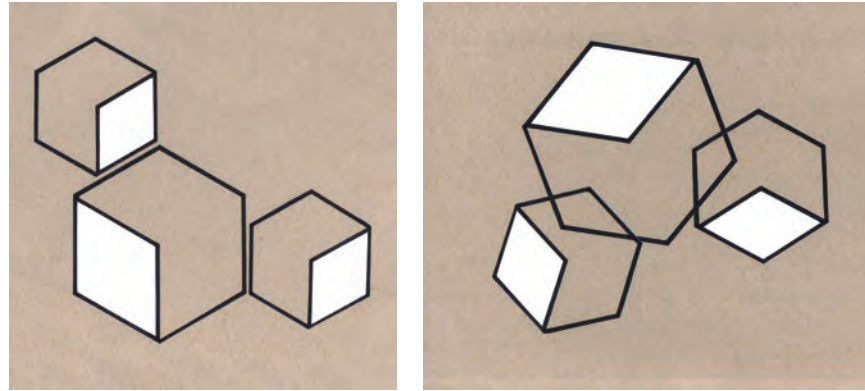

GOA

by José Ignacio Ballester


Apliques - Wall lights

Indoor



REFERENCE	K	LED WATT	LUMENS	FINISH	
7720	3000K	7.5W	660lm	Blanco mate-Matt white	Con interruptor With switch
7721	3000K	7.5W	660lm	Negro mate-Matt black	Con interruptor With switch
220-240V-50/60Hz CRI:≥ 80				Aluminio-Aluminium	

47.20

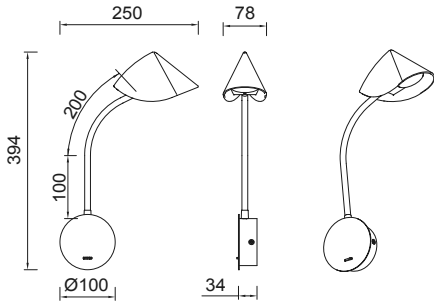



54.50

REFERENCE	K	LED WATT	LUMENS	FINISH	
7513	3000K	6W	390lm	Negro arena-Sand black	Sin interruptor No switch
7514	3000K	6W	390lm	Negro arena-Sand black	Con interruptor With switch
220-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium	



7512
pág. 170




7510
pág. 160



VENUS
by Hugo Tejada

Apliques - Wall lights

Indoor

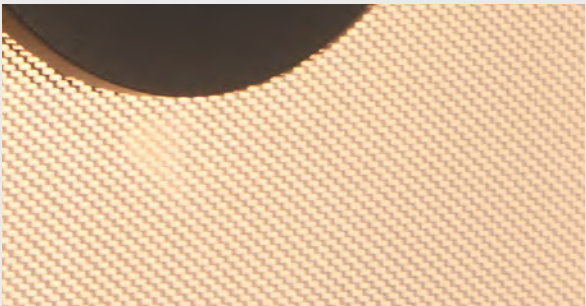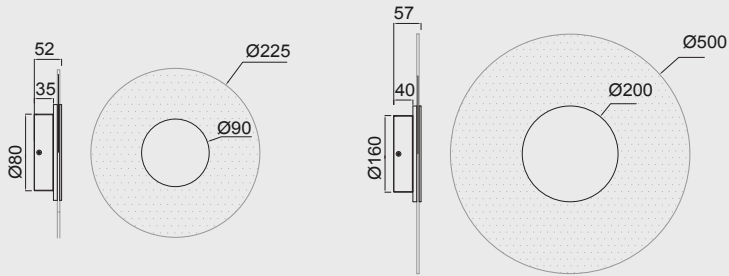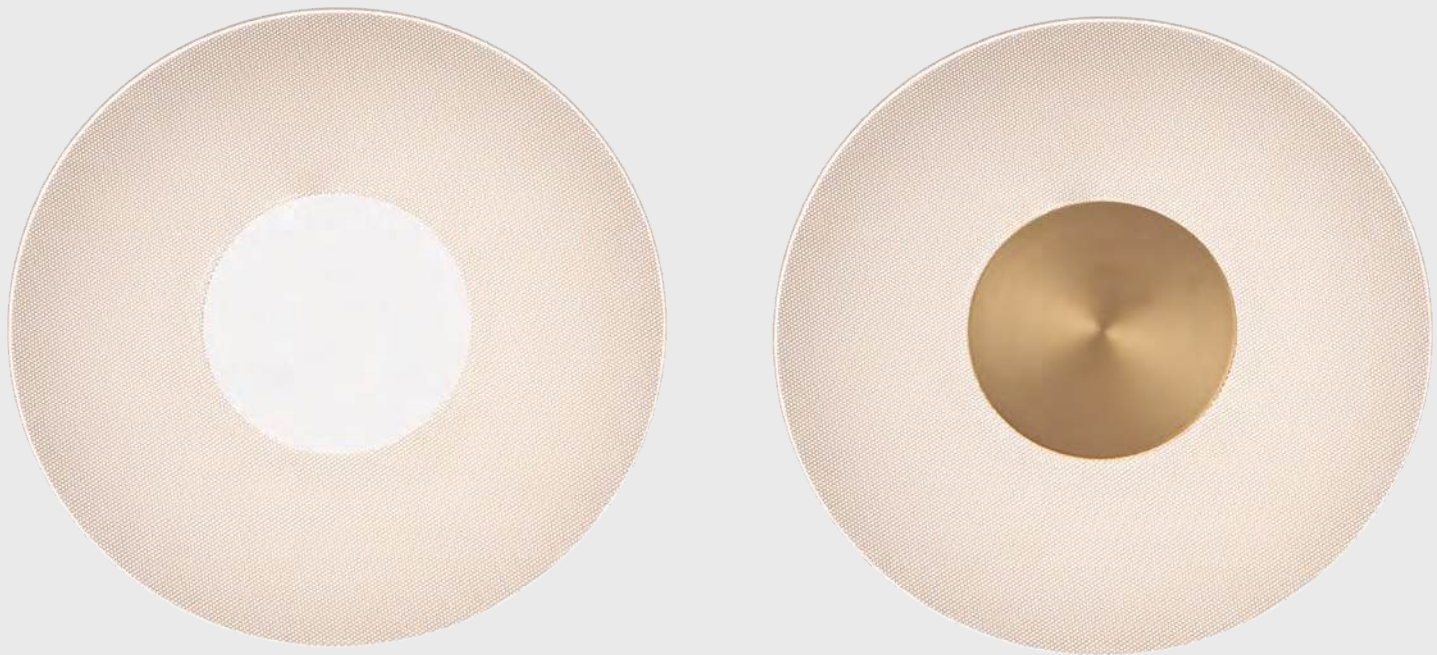


59.80

65.60

157.50

170.20

REFERENCE	K	LED WATT	LUMENS	FINISH	SIZES
8010	3000K	9W	780lm	Blanco-White	Ø225
8011	3000K	9W	780lm	Negro-Black	Ø225
8034	3000K	9W	780lm	Oro-Gold	Ø225
8012	3000K	18W	1440lm	Blanco-White	Ø500
8013	3000K	18W	1440lm	Negro-Black	Ø500
8035	3000K	18W	1440lm	Oro-Gold	Ø500
Registered N°007663331-0016		220-240V~50/60Hz CRI≥ 80		Aluminio/Acrílico-Aluminum/Acrylic	

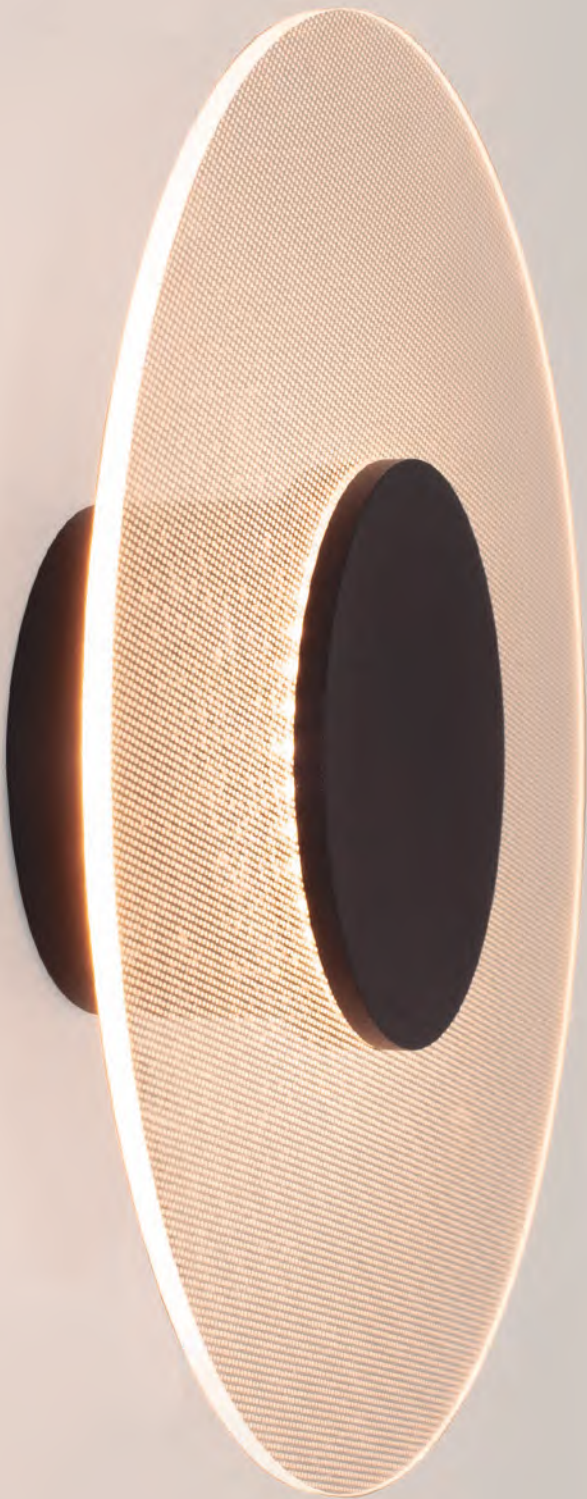

DRIVER
TUV

Registered N°007663331-0016







49.10

67.80

82.20

REFERENCE	K	LED WATT	LUMENS	FINISH
7197	3000K	10W	780lm	Blanco-White
7175	3000K	10W	780lm	Negro-Black
7198	3000K	20W	1550lm	Blanco-White
7176	3000K	20W	1550lm	Negro-Black
7199	3000K	30W	2300lm	Blanco-White
7177	3000K	30W	2300lm	Negro-Black
220-240V~50/60Hz CRI≥ 80				Aluminio-Aluminium

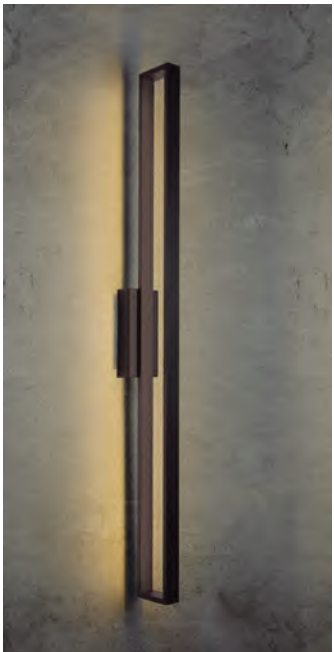





40€

43€

47.70€

REFERENCE	K	LED WATT	LUMENS	FINISH
7482	4000K	12W	1080lm	Negro-Black
6760	4000K	12W	1080lm	Cromo-Chrome
6763	4000K	12W	1080lm	Blanco-White
7483	4000K	16W	1440lm	Negro-Black
6761	4000K	16W	1440lm	Cromo-Chrome
7480	4000K	16W	1440lm	Blanco-White
7484	4000K	20W	1800lm	Negro-Black
6762	4000K	20W	1800lm	Cromo-Chrome
7481	4000K	20W	1800lm	Blanco-White
220-240V~50/60Hz CRI≥ 80				Aluminio/Pc-Aluminium

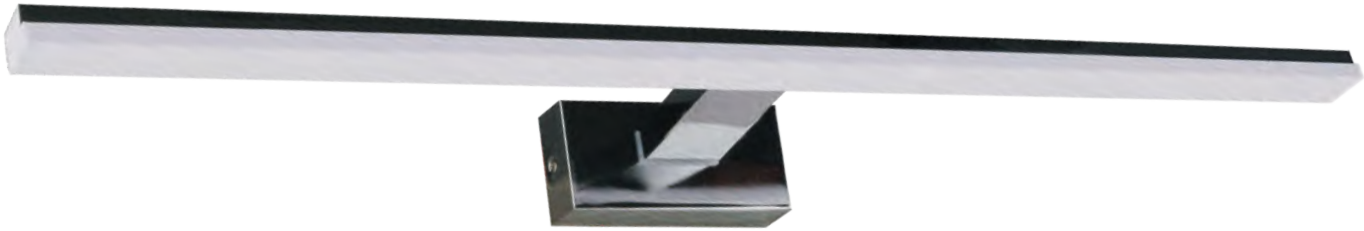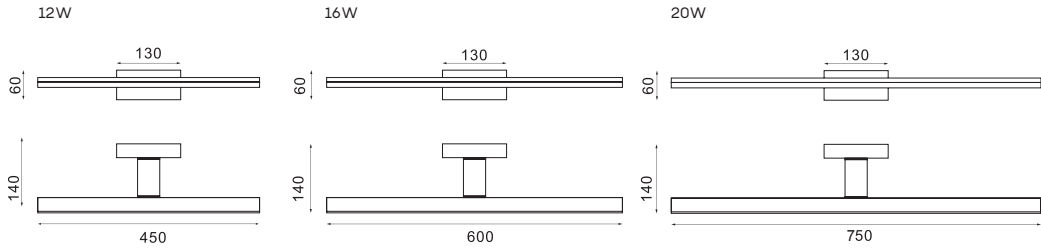


ASIMETRIC



by Santolaria & Lluscà

Apliques - Wall lights

Indoor

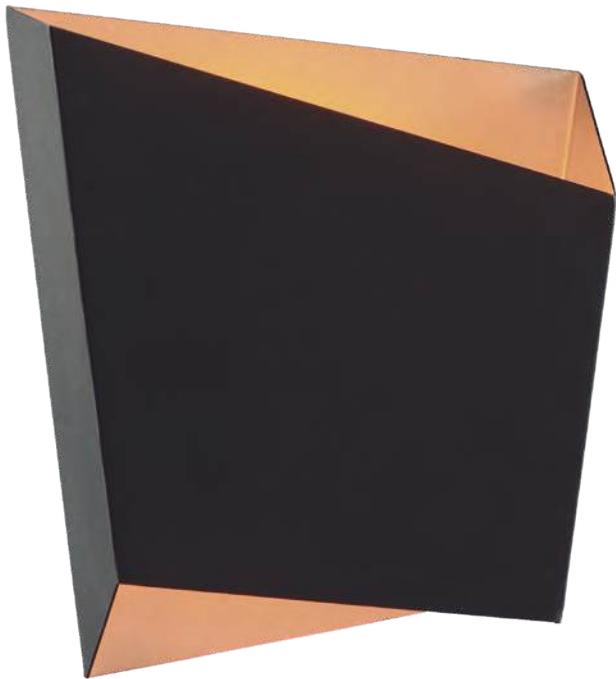

REFERENCE	BULB (No incl)	FINISH
6220	1L x GX53	Blanco-White
6221	1L x GX53	Blanco-White
6222	1L x GX53	Negro-Black
máx. 12W LED (No incl)		100-240V~50/60Hz Metal-Metal



Bombillas recomendadas-Suggested bulbs

REFERENCE	Wattios LED	CCT	Lumens	Ángulo luz
 R09224	9W	3000K	730lm	120°
 R09225	9W	4000K	740lm	120°
 R09248	12W	3000K	930lm	120°
 R09249	12W	4000K	960lm	120°





Registered N° 004721413-026




6221



6220



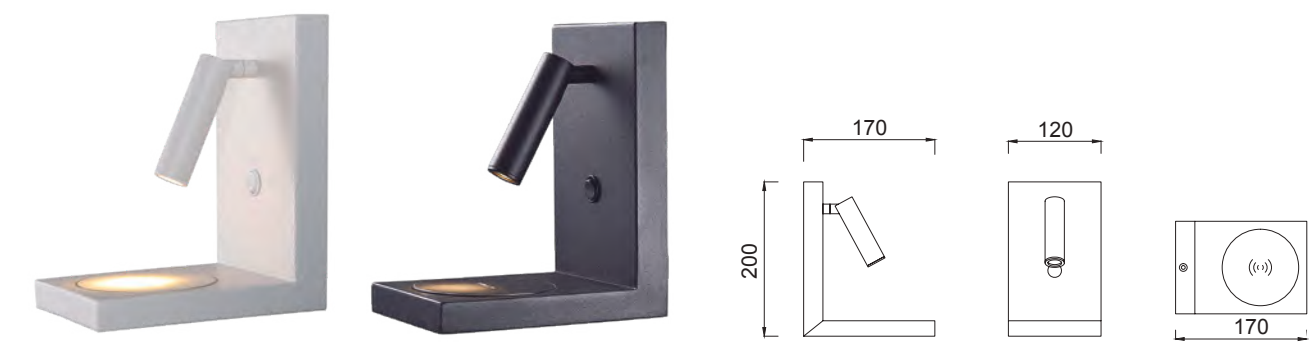

 *Cargador Inalámbrico de inducción-Wireless Induction Charger

REFERENCE	K	LED WATT	LUMENS	FINISH
6750	3000K	3W	210lm	Blanco arena-Sand white
6752	3000K	3W	210lm	Negro arena-Sand black
		100-240V~50/60Hz CRI≥ 80	Aluminio/Metal-Aluminium/Metal	


103.50€




 *Cargador Inalámbrico de inducción-Wireless Induction Charger

REFERENCE	K	LED WATT	LUMENS	FINISH
6754	3000K	3W	210lm	Blanco mate-Matt white
6755	3000K	3W	210lm	Negro mate-Matt black
		100-240V~50/60Hz CRI≥ 80	Aluminio/Metal-Aluminium/Metal	



86.40

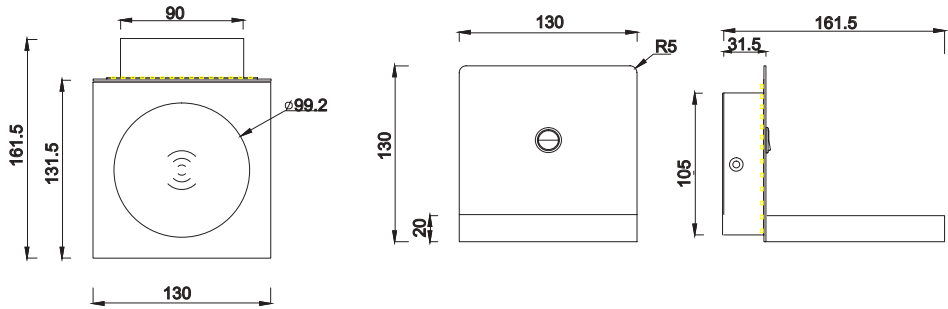

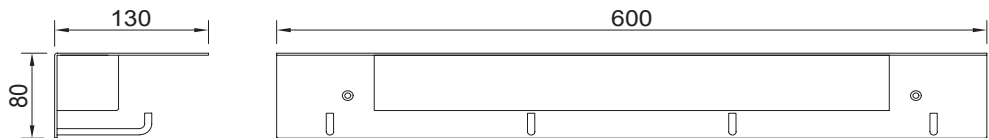

REFERENCE	K	LED WATT	LUMENS	FINISH
6865	3000K	9W	600lm	Blanco mate-Matt white
		100-250V~ 50/60Hz CRI:≥ 80		Acero/Acrílico-Steel/Acrylic




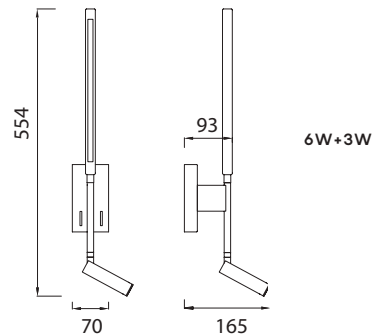

51.90

73.80

REFERENCE	K	LED WATT	LUMENS	FINISH
6700	3000K	6 W	410lm	Blanco mate-Matt white
6701	3000K	6 W	410lm	Negro mate-Matt black
6702	3000K	6 W+3 W	410lm+210lm	Blanco mate-Matt white
6703	3000K	6 W+3 W	410lm+210lm	Negro mate-Matt black
220-240V~50/60Hz CRI≥ 80				Aluminio-Aluminium

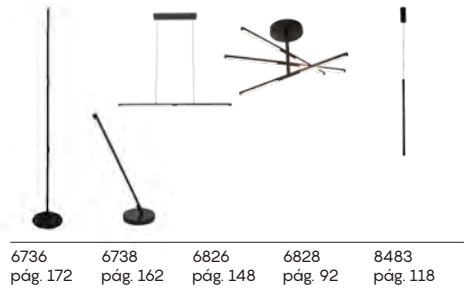



45.30


46.50

REFERENCE	BULB (No incl)	FINISH	
7523	1L x GU10	Blanco mate-Matt white	Sin interruptor No switch
7518	1L x GU10	Negro mate-Matt black	Sin interruptor No switch
7524	1L x GU10	Blanco mate-Matt white	Con interruptor With switch
7519	1L x GU10	Negro mate-Matt black	Con interruptor With switch
máx. 10W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium	






Bombillas recomendadas-Suggested bulbs

K	Wat	LED	Reference
3000K	6W		R09196
4000K	6W		R09214
5000K	6W		R09197

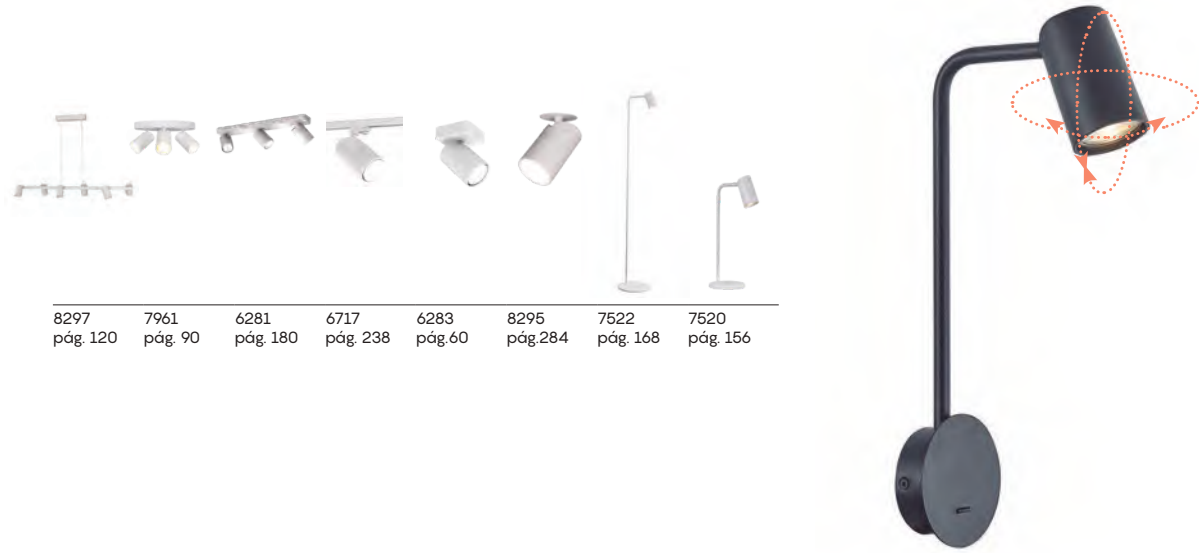

8297 pág. 120	7961 pág. 90	6281 pág. 180	6717 pág. 238	6283 pág. 60	8295 pág. 284	7522 pág. 168	7520 pág. 156
------------------	-----------------	------------------	------------------	-----------------	------------------	------------------	------------------

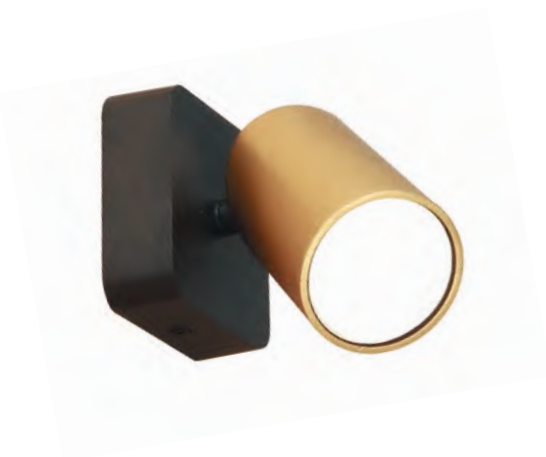

ErP
COMPLIANT

RoHS
compliant

17.30

NEW


23.10

REFERENCE	BULB (No incl)	FINISH	
6283	1L x GU10	Blanco mate-Matt white	Sin interruptor No switch
6713	1L x GU10	Negro mate-Matt black	Sin interruptor No switch
8490	1L x GU10	Oro-Gold	Sin interruptor No switch
6284	1L x GU10	Blanco mate-Matt white	Con interruptor With switch
6714	1L x GU10	Negro mate-Matt black	Con interruptor With switch
máx. 10W LED (No incl)		100-240V ~50/60Hz Aluminio-Aluminium	



Bombillas recomendadas-Suggested bulbs

	K	Wat LED	Reference
	3000K	6W	R09196
	4000K	6W	R09214
	5000K	6W	R09197

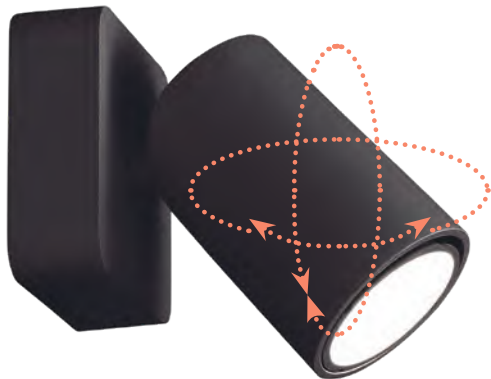

Incl.



WARRANTY



NOT INCLUDED



IP20




REFERENCE	K	LED WATT	LUMENS	FINISH
6080	3000K	3+6W	210+410lm	Blanco mate-Matt white
6081	3000K	3+6W	210+410lm	Níquel satinado-Satin nickel
6082	3000K	3+6W	210+410lm	Cuero-Antique brass
6083	3000K	3+6W	210+410lm	Negro mate-Matt black
7853	3000K	3+6W	210+410lm	Oro-Gold
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium

62.90
a
70.60



REFERENCE	K	LED WATT	LUMENS	FINISH
7823	3000K	3+6W	210+410lm	Blanco mate-Matt white
7824	3000K	3+6W	210+410lm	Níquel satinado-Satin nickel
7825	3000K	3+6W	210+410lm	Cuero-Antique brass
7826	3000K	3+6W	210+410lm	Negro mate-Matt black
7854	3000K	3+6W	210+410lm	Oro-Gold
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium

62.90
a
70.60

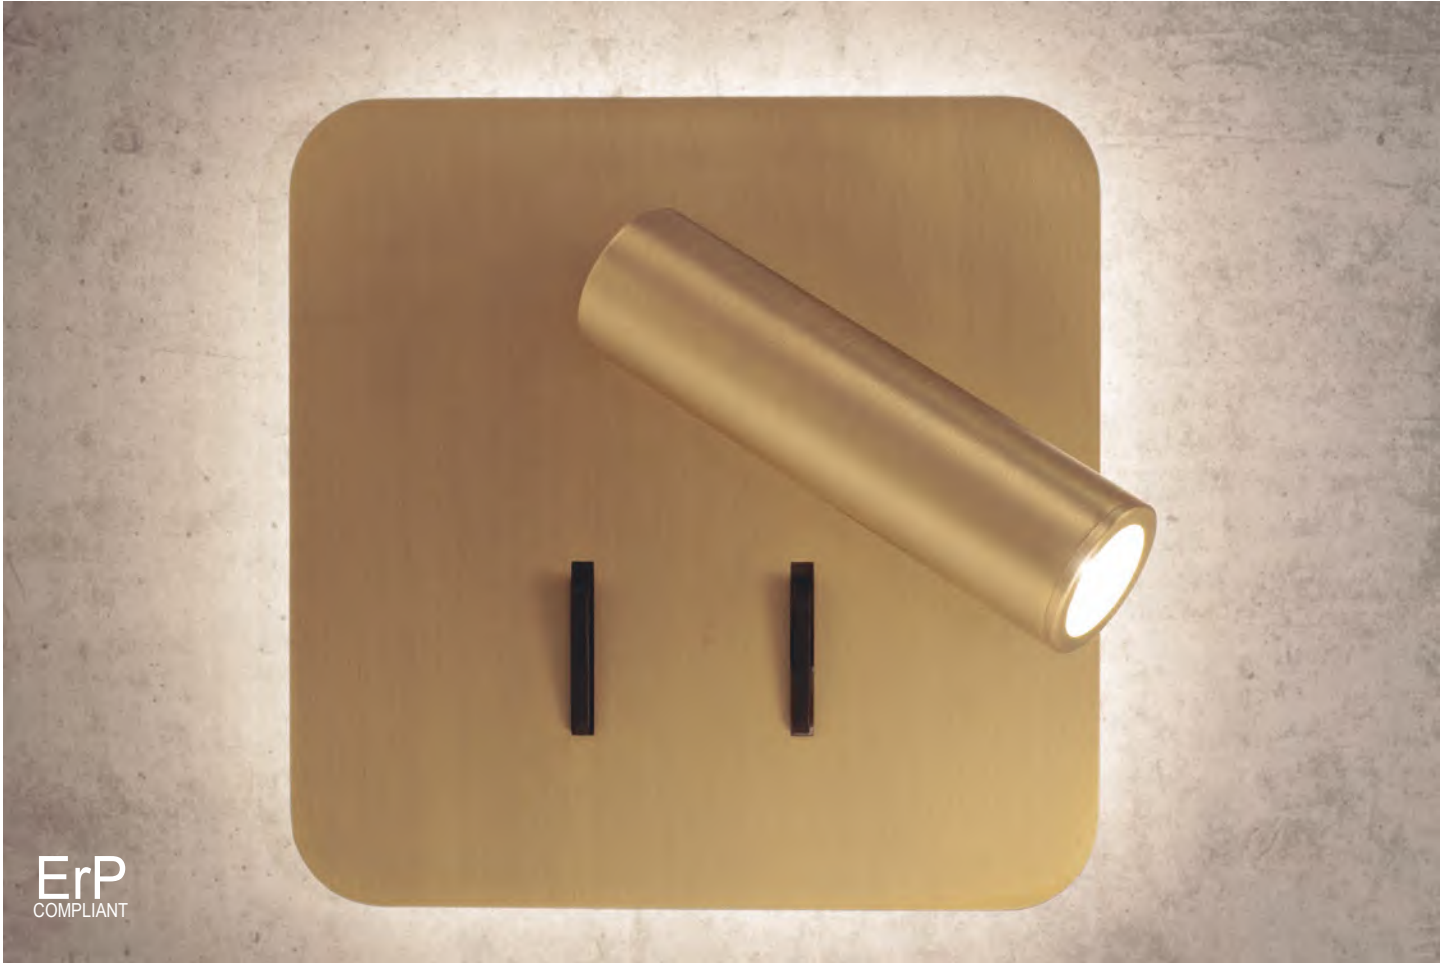



36.30

REFERENCE	K	LED WATT	LUMENS	FINISH
6046	3000K	3W	185lm	Blanco-White
6047	3000K	3W	185lm	Negro-Black
220-240V~50/60Hz CRI:≥ 80				Aluminio/acrílico-Aluminium/acrylic



45.50


REFERENCE	K	LED WATT	LUMENS	FINISH
6050	3000K	5W	285lm	Blanco-White
6051	3000K	5W	285lm	Negro-Black
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium





47.50


REFERENCE	K	LED WATT	LUMENS	FINISH
6820	3000K	3W	210lm	Blanco arena-Sand white
6821	3000K	3W	210lm	Negro arena-Sand black
100-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium

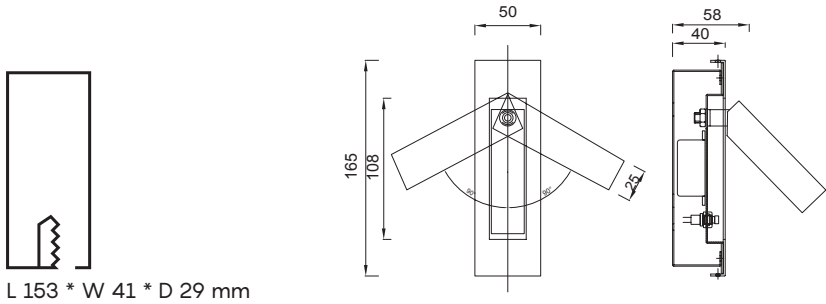

TARIFA II
New

Aplique lector-Wall lamp reader


Indoor

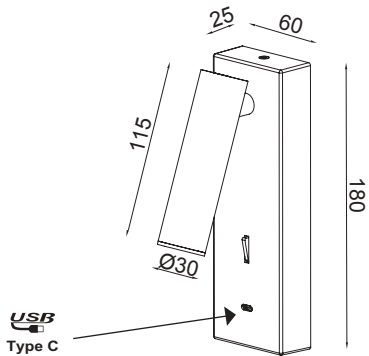

43.50
a
51.40

REFERENCE	K	LED WATT	LUMENS	FINISH
8498	3000K	3W	210lm	Blanco mate-Matt white
8499	3000K	3W	210lm	Negro mate-Matt black
8500	3000K	3W	210lm	Níquel satinado-Satin nickel
8501	3000K	3W	210lm	Cuero-Antique brass
220-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium



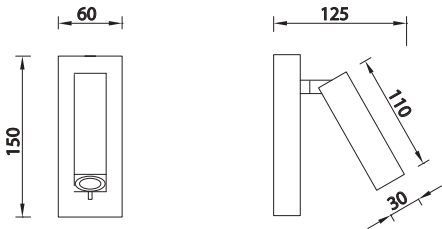

37.40
a
45.40


REFERENCE	K	LED WATT	LUMENS	FINISH
6070	3000K	3W	210lm	Blanco mate-Matt white
6071	3000K	3W	210lm	Níquel satinado-Satin nickel
6072	3000K	3W	210lm	Cuero-Antique brass
100-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium





40.30
a
46.40



REFERENCE	K	LED WATT	LUMENS	FINISH
6075	3000K	3W	210lm	Blanco mate-Matt white
6076	3000K	3W	210lm	Níquel satinado-Satin nickel
6077	3000K	3W	210lm	Cuero-Antique brass
100-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium

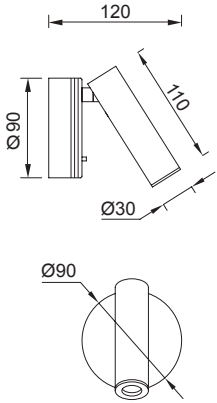



REFERENCE	BULB (No incl)	FINISH	LECTOR/READER	LUMENS
6091	1L x E27	Blanco mate-Matt white	3W	210lm
6092	1L x E27	Níquel Satinado-Satin Nickel	3W	210lm
6093	1L x E27	Cuero-Antique brass	3W	210lm
máx. 20W LED (No incl)		220-240V~50/60Hz CRI:≥ 80 Aluminio-Aluminium	Cargador USB /Charger USB Pantalla blanca/White shade	

USB
Output

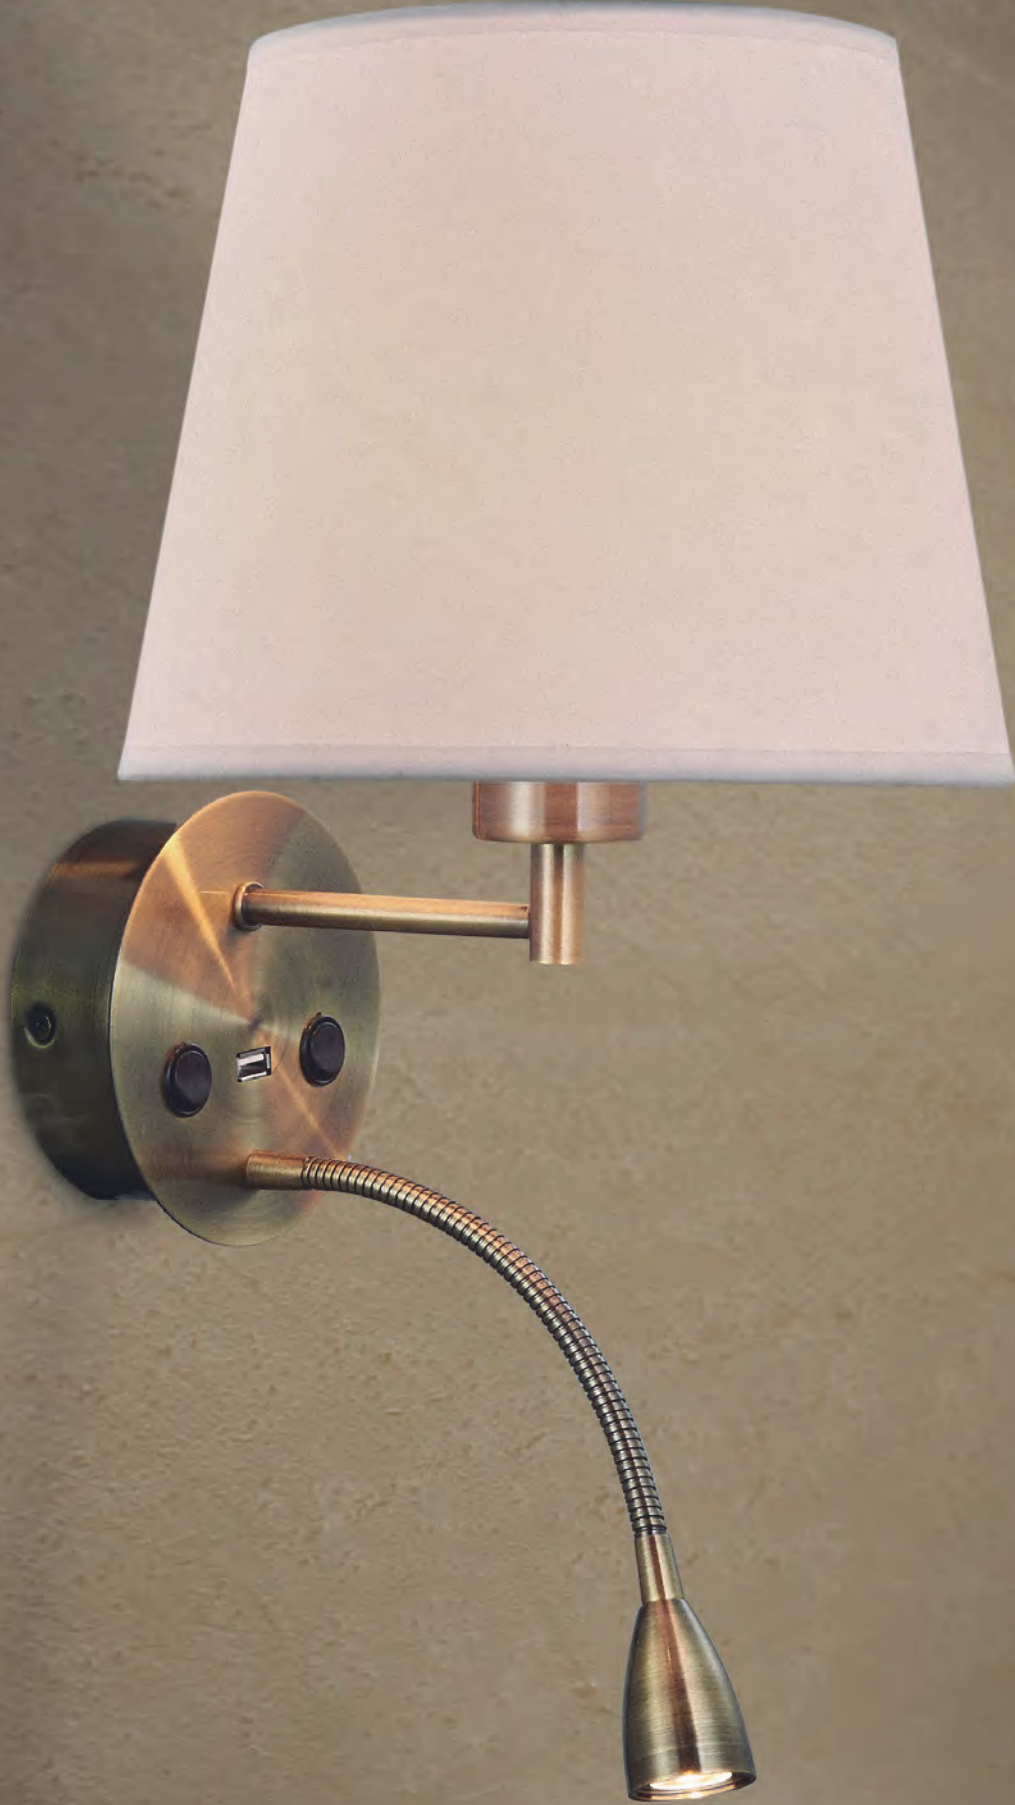




37€

53.90€



REFERENCE	K	LED WATT	LUMENS	FINISH
C0127	2700K	6W	420lm	Blanco-White
C0131	2700K	6W	420lm	Negro-Black
C0101	3000K	6W	540lm	Blanco-White
C0119	3000K	6W	540lm	Negro-Black
C0128	2700K	12W	840lm	Blanco-White
C0132	2700K	12W	840lm	Negro-Black
C0102	3000K	12W	1080lm	Blanco-White
C0120	3000K	12W	1080lm	Negro-Black
220-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium

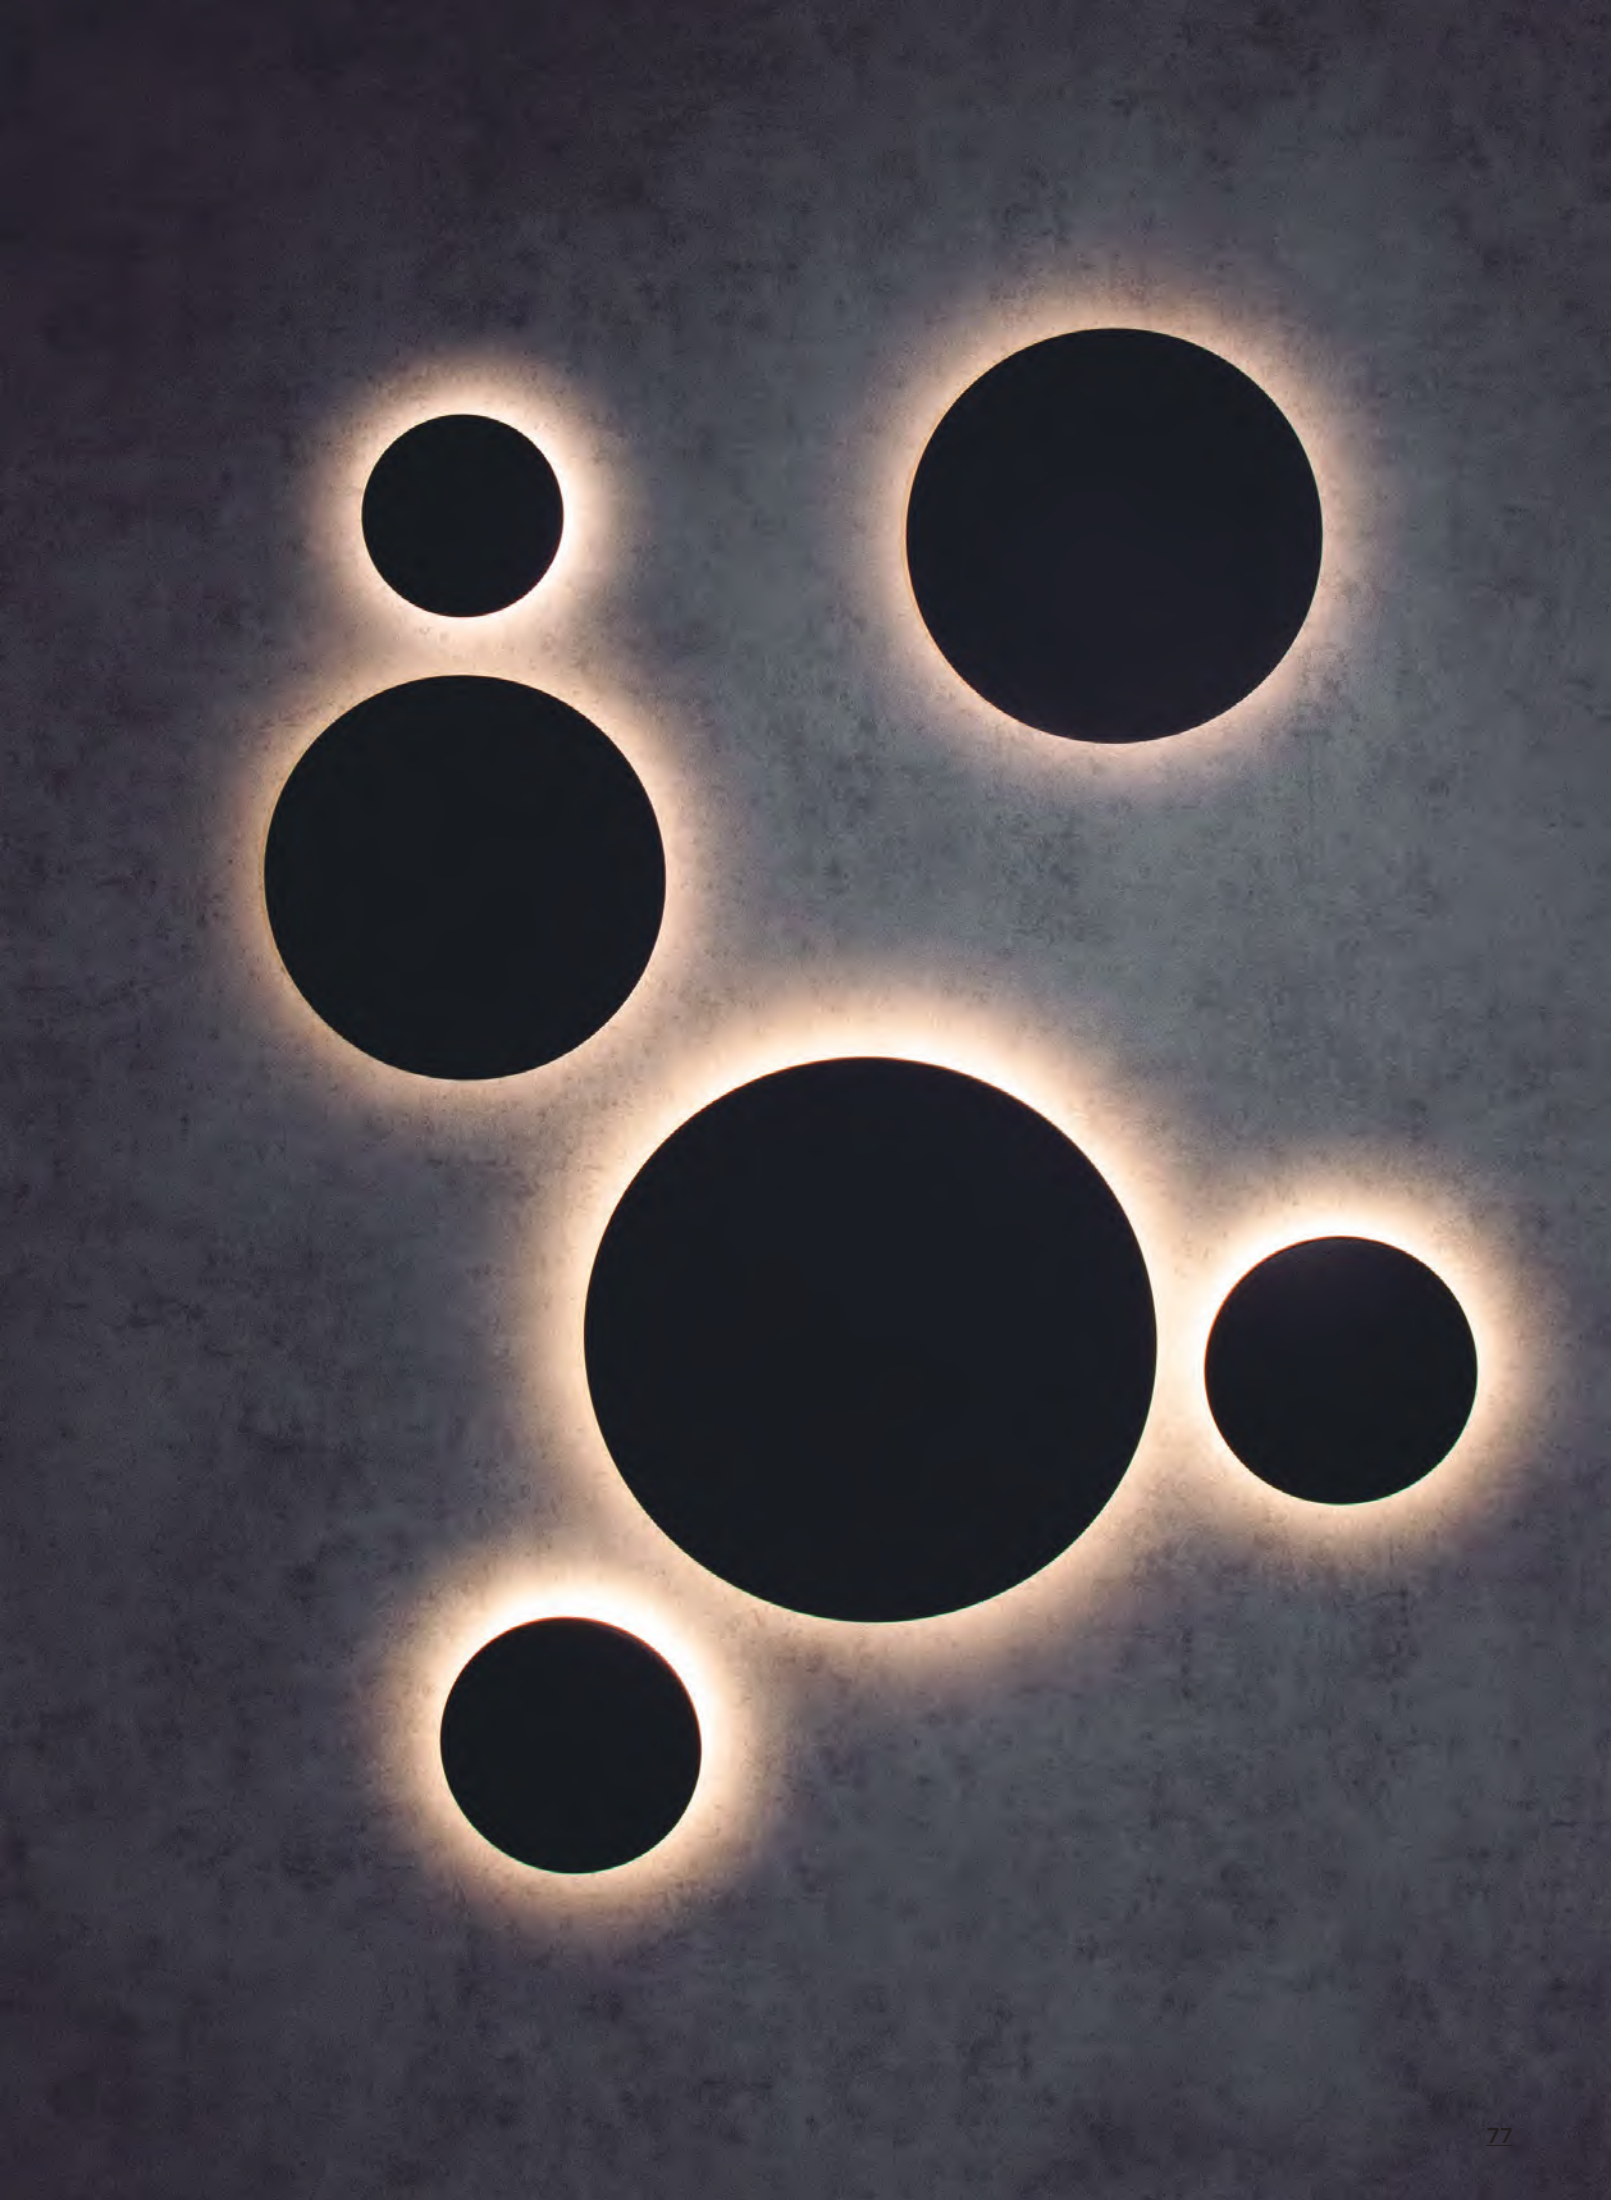


BORA BORA

Apliques - Wall lights

Indoor

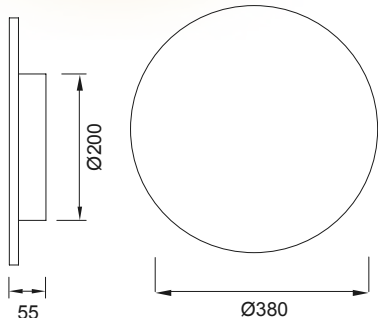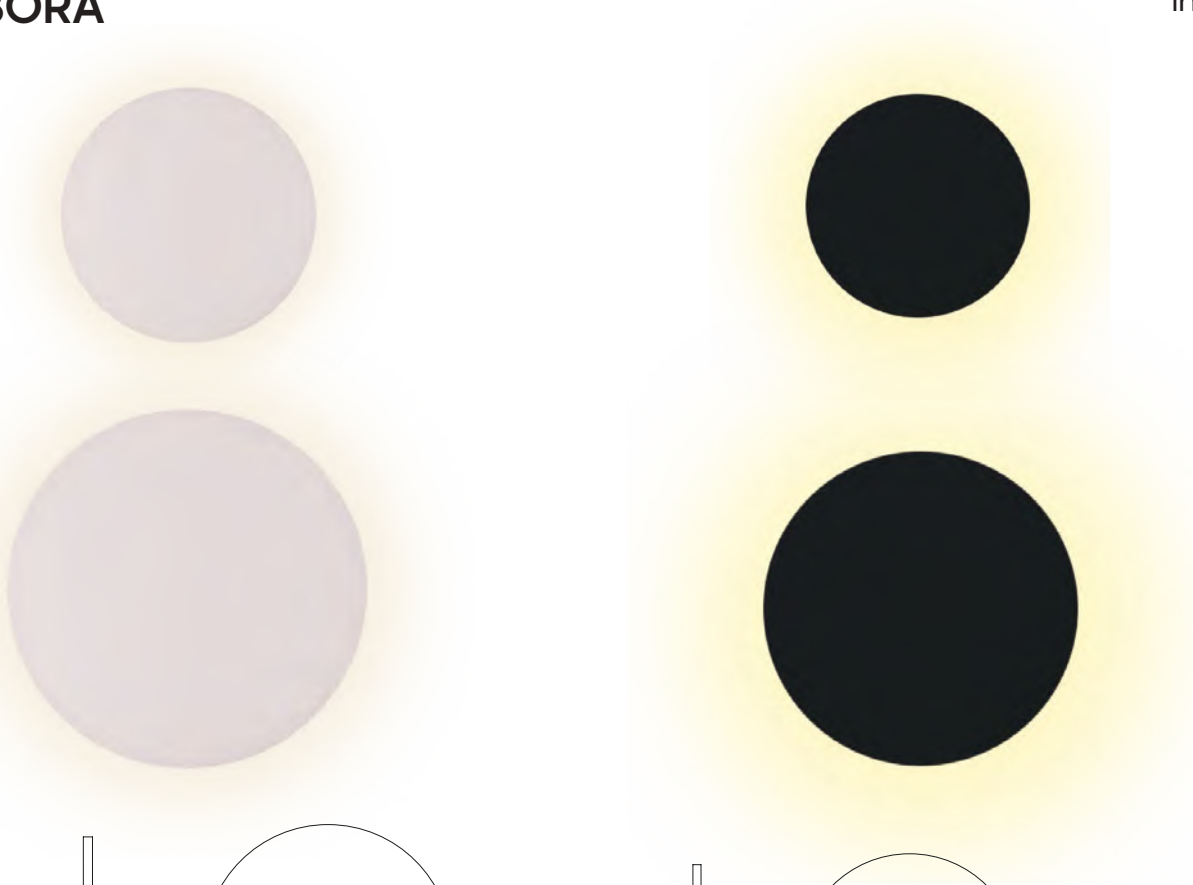

30W



16W



REFERENCE	K	LED WATT	LUMENS	FINISH
C0129	2700K	16W	1120lm	Blanco-White
C0133	2700K	16W	1120lm	Negro-Black
C0117	3000K	16W	1350lm	Blanco-White
C0124	3000K	16W	1350lm	Negro-Black
C0130	2700K	30W	2100lm	Blanco-White
C0134	2700K	30W	2100lm	Negro-Black
C0125	3000K	30W	2400lm	Blanco-White
C0126	3000K	30W	2400lm	Negro-Black
220-240V ~50/60Hz CRI:≥ 80				Aluminio-Aluminium


76.70

112.60






C0103




C0104



REFERENCE	K	LED WATT	LUMENS	FINISH	SIZES
C0103	3000K	6W	540lm	Blanco-White	130 x 130
C0104	3000K	12W	1080lm	Blanco-White	180 x 180
220-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium	





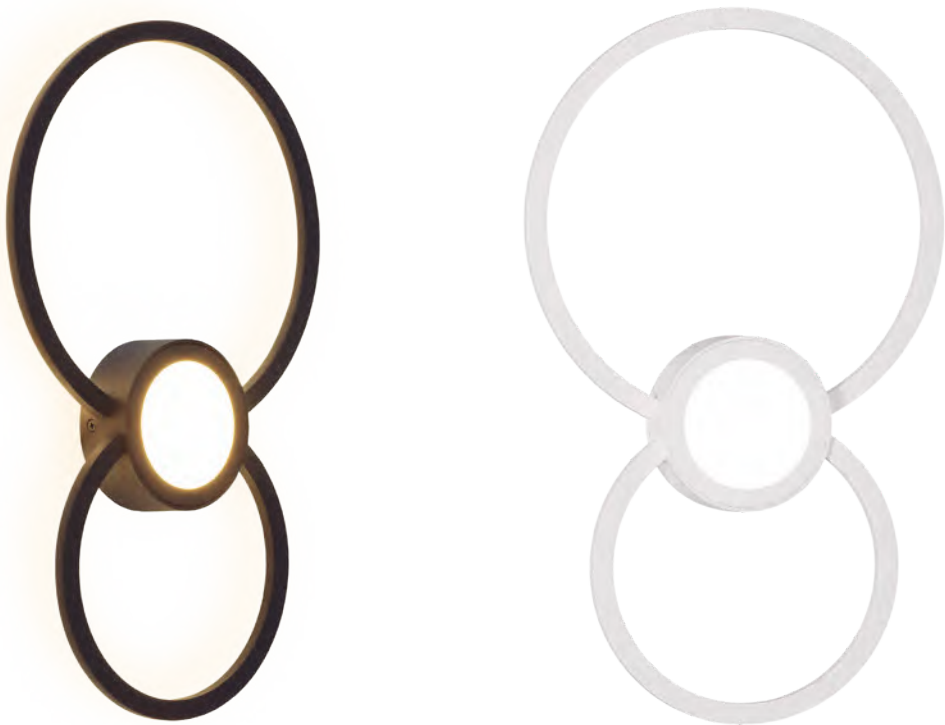

86.40


94.50

REFERENCE	K	LED WATT	LUMENS	FINISH	INPUT	
6230	3000K	24W	1440lm	Blanco mate-Matt white	100-250V~ 50/60Hz	On-off
7460	3000K	24W	1440lm	Negro mate-Matt black	100-250V~ 50/60Hz	On-off
7840	3000K	24W	1440lm	Blanco mate-Matt white	220-240V~50/60Hz	Dimmable
7841	3000K	24W	1440lm	Negro mate-Matt black	220-240V~50/60Hz	Dimmable
					CRI: ≥ 80	Aluminio-Aluminium

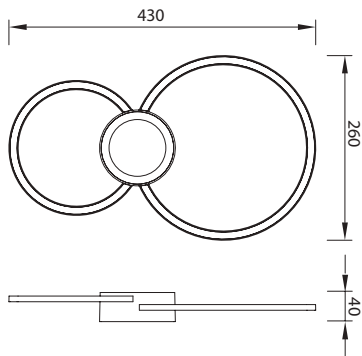




REFERENCE	K	LED WATT	LUMENS	FINISH
6382	3000K	8W	619lm	Cuero-Antique brass
6380	3000K	8W	619lm	Cromo-Chrome
6383	3000K	12W	908lm	Cuero-Antique brass
6381	3000K	12W	908lm	Cromo-Chrome
6385	3000K	18W	1257lm	Cuero-Antique brass
6384	3000K	18W	1257lm	Cromo-Chrome
175-265V ~50/60Hz CRI: ≥ 80				Aluminio-Aluminium

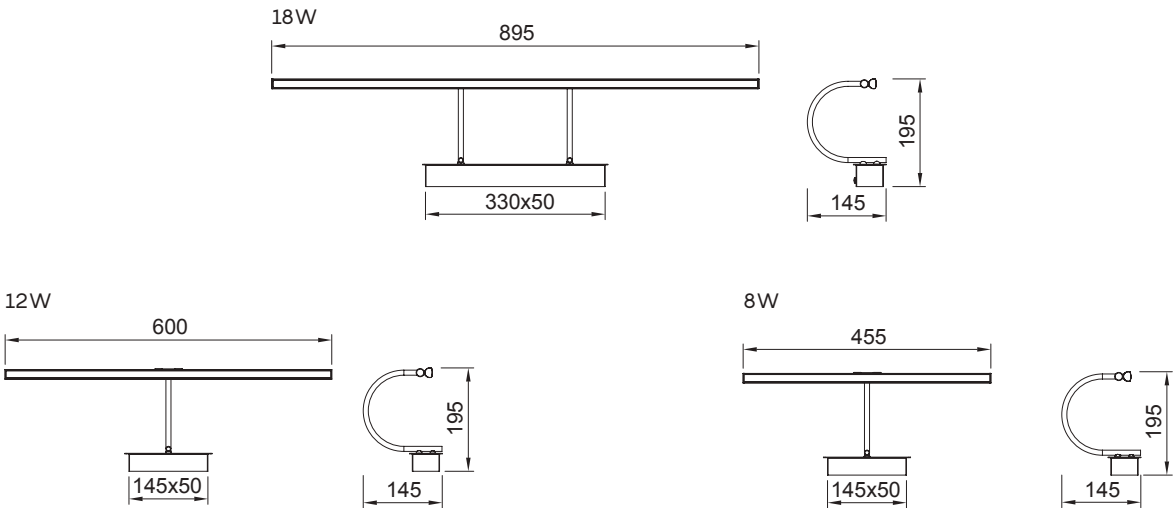

Plafones

Ceiling lights

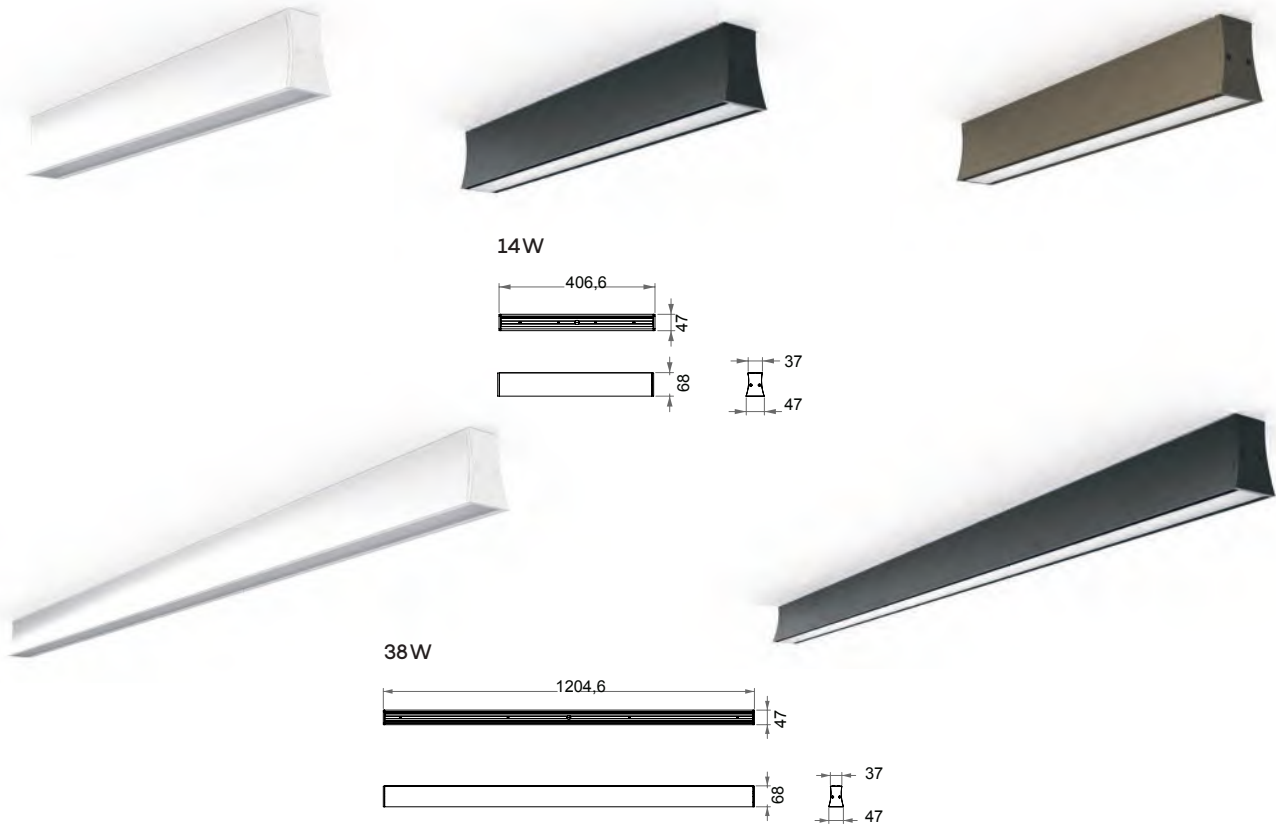

78.70

a

115.20

REFERENCE	K	LED WATT	LUMENS	FINISH
7949	3000K	14W	950lm	Blanco-White
7951	3000K	14W	950lm	Negro-Black
7953	3000K	14W	950lm	Arena-Sabbia
7950	4000K	14W	1000lm	Blanco-White
7952	4000K	14W	1000lm	Negro-Black
7945	3000K	38W	2850lm	Blanco-White
7947	3000K	38W	2850lm	Negro-Black
7946	4000K	38W	3000lm	Blanco-White
7948	4000K	38W	3000lm	Negro-Black
220-240V~50/60Hz CRI≥ 80				Aluminio-Aluminium

7548
pág. 130

7953
pág. 30

7546
pág. 126

UGR<19




LED life / LED vida
50.000 h



garantía mantraco 5 años
WARRANTY 5 años
GARANTIA 5 años
LED




IP20

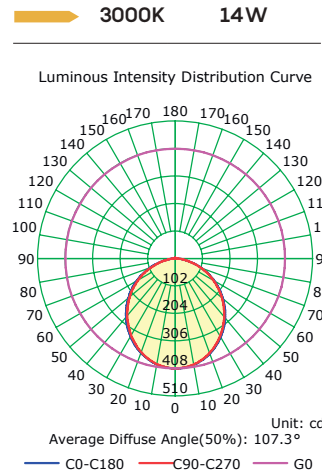



58.75

REFERENCE	BULB (No incl)	FINISH
7961	3L x GU10	Blanco mate-Matt white
7962	3L x GU10	Negro mate-Matt black
máx. 10W LED (No incl) 100-240V~50/60Hz Aluminio-Aluminium		



Bombillas recomendadas-Suggested bulbs

K	Wat LED	Reference
3000K	6W	R09196
4000K	6W	R09214
5000K	6W	R09197



8297 pág. 120	6281 pág. 180	6717 pág. 238	6283 pág. 60	7523 pág. 58	8295 pág. 284
------------------	------------------	------------------	-----------------	-----------------	------------------



7522 pág. 158	7520 pág. 156
------------------	------------------



TORCH


Indoor

360°




192.60€

REFERENCE	K	LED WATT	LUMENS	FINISH
6827	3000K	36 W	2850lm	Blanco arena-Sand white
6828	3000K	36 W	2850lm	Negro arena-Sand black
220-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium

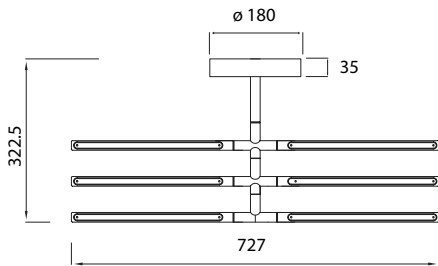

360°

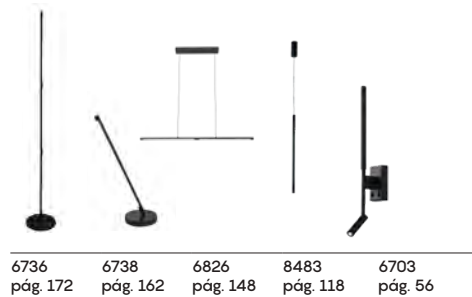

6736
pág. 172


6738
pág. 162

6826
pág. 148

8483
pág. 118

6703
pág. 56





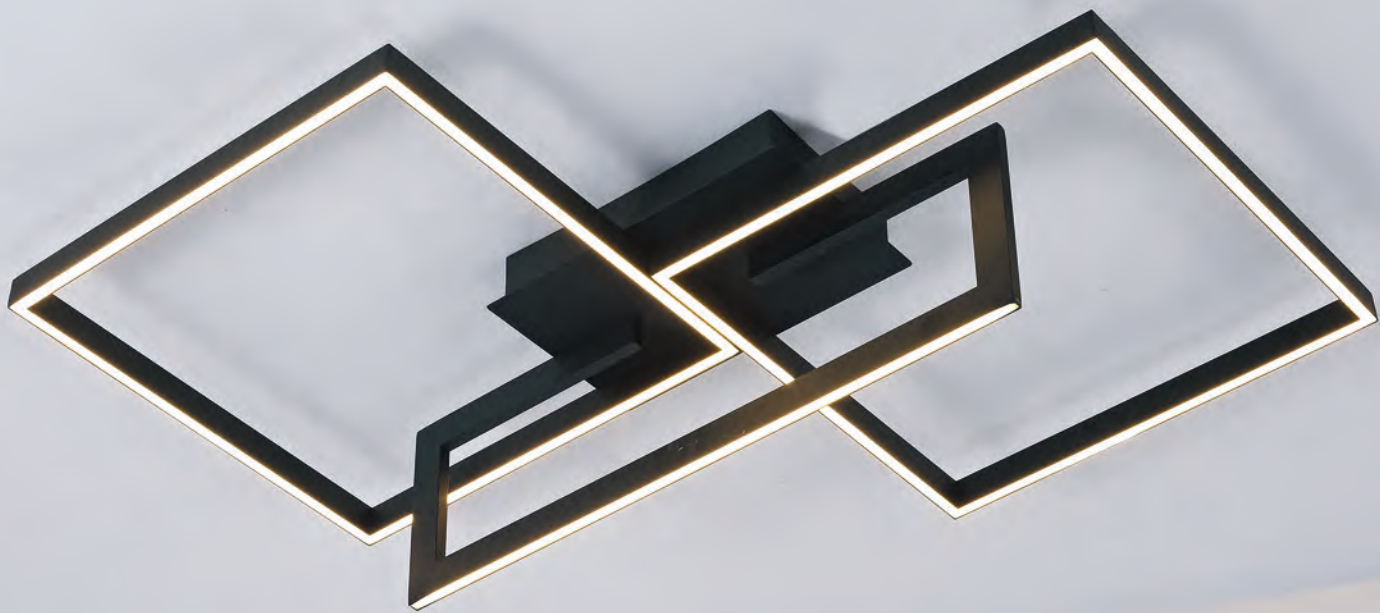

203.70

230

REFERENCE	K	LED WATT	LUMENS	FINISH	
6560	3000K	48 W	3840lm	Blanco mate-Matt white	On-off
6561	3000K	48 W	3840lm	Blanco mate-Matt white	Dimmable 
7462	3000K	48 W	3840lm	Negro-Black	On-off
7463	3000K	48 W	3840lm	Negro-Black	Dimmable 
220-240V~50/60Hz CRI≥ 80				Aluminio-Aluminium	

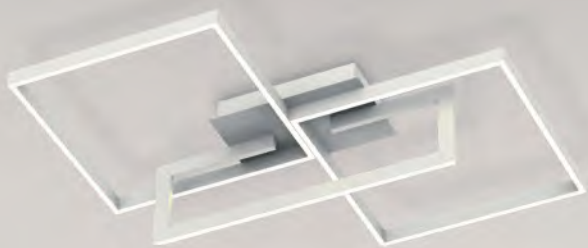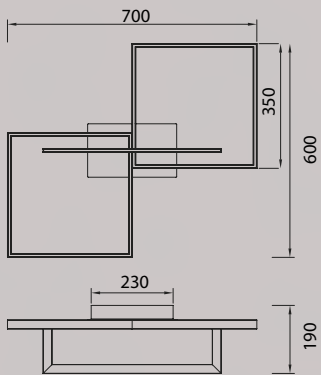





34.50
22.80

REFERENCE	BULB NO INCLUDED	FINISH
5410	5L x E27	Blanco-White
5411	3L x E27	Blanco-White
máx. 20W LED (No incl) 100-240V~50/60Hz Metal-Metal/Acrylic		

5L




3L






Downlight en superficie para paredes y soluciones sin falso techo.

REFERENCE	K	LED WATT	LUMENS	FINISH
6620	3000K	8W	680lm	Blanco mate-Matt white
6621	4000K	8W	720lm	Blanco mate-Matt white
6622	3000K	14W	1190lm	Blanco mate-Matt white
6623	4000K	14W	1260lm	Blanco mate-Matt white
6624	3000K	24W	2040lm	Blanco mate-Matt white
6625	4000K	24W	2160lm	Blanco mate-Matt white
6626	3000K	30W	2550lm	Blanco mate-Matt white
6627	4000K	30W	2700lm	Blanco mate-Matt white
220-240V ~ 50/60Hz CRI≥ 80				Aluminio-Aluminium

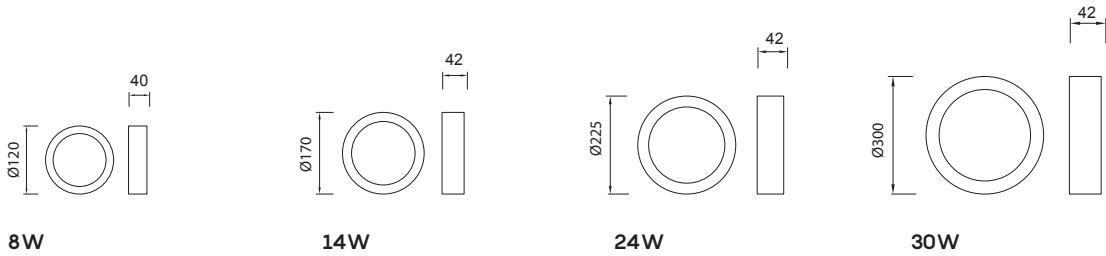



Downlight en superficie para paredes y soluciones sin falso techo.

REFERENCE	K	LED WATT	LUMENS	FINISH
6628	3000K	8W	680lm	Blanco mate-Matt white
6629	4000K	8W	720lm	Blanco mate-Matt white
6630	3000K	14W	1190lm	Blanco mate-Matt white
6631	4000K	14W	1260lm	Blanco mate-Matt white
6632	3000K	24W	2040lm	Blanco mate-Matt white
6633	4000K	24W	2160lm	Blanco mate-Matt white
6634	3000K	30W	2550lm	Blanco mate-Matt white
6635	4000K	30W	2700lm	Blanco mate-Matt white
220-240V ~ 50/60Hz CRI≥ 80				Aluminio-Aluminium

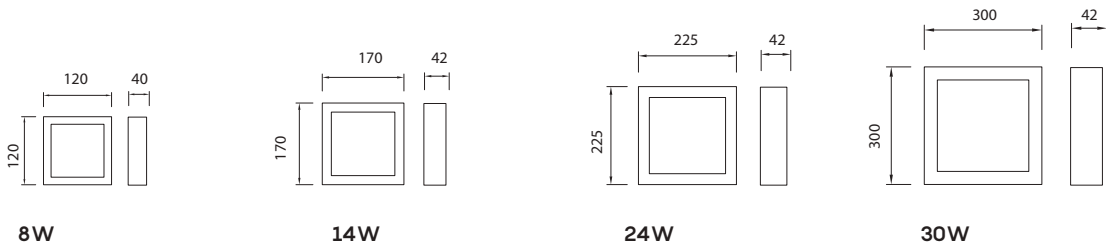


Colgante



Pendant lamp

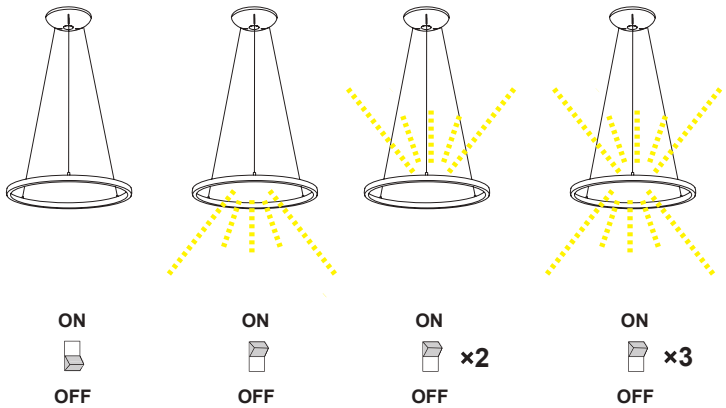

251.20


REFERENCE	K	LED WATT	LUMENS	FINISH
8672	3000K	40W+15W	3800lm	Blanco-White
8673	3000K	40W+15W	3800lm	Negro-Black
8674	3000K	40W+15W	3800lm	Arena-Sabbia
UGR<16		220-240V ~ 50/60Hz CRI:≥ 90		Aluminio-Aluminium




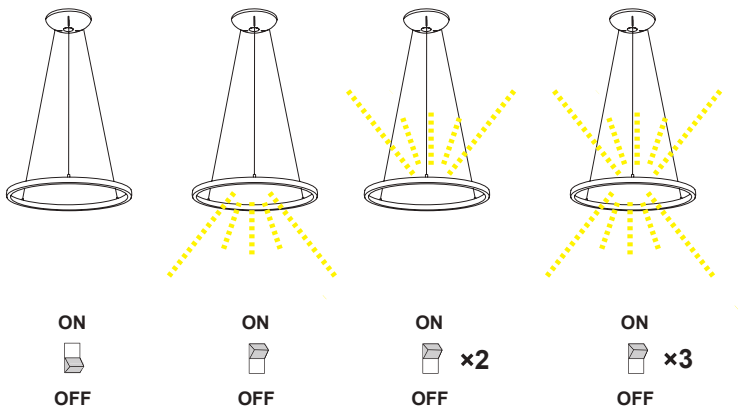


390.70€

REFERENCE	K	LED WATT	LUMENS	FINISH
8675	3000K	60W+20W	5800lm	Blanco-White
8676	3000K	60W+20W	5800lm	Negro-Black
8677	3000K	60W+20W	5800lm	Arena-Sabbia
UGR<16		220-240V~ 50/60Hz CRI:≥ 90		Aluminio-Aluminium



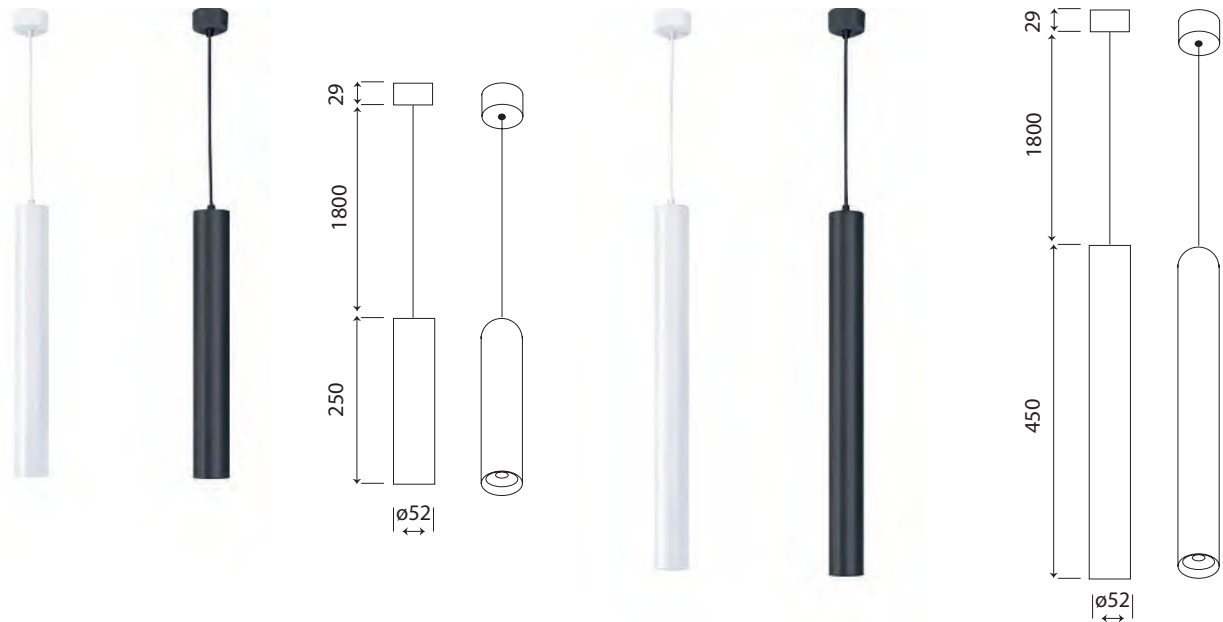

 CCT SWITCH
2700K - 3200K - 4000K





REFERENCE	CCT switch	LED WATT	LUMENS	FINISH
8355	2700K-3200K-4000K	7W	560lm	Blanco-White
8356	2700K-3200K-4000K	7W	560lm	Negro-Black
8357	2700K-3200K-4000K	10W	770lm	Blanco-White
8358	2700K-3200K-4000K	10W	770lm	Negro-Black
UGR<19		220-240V~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium

53.40

61.30




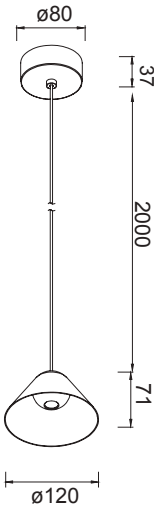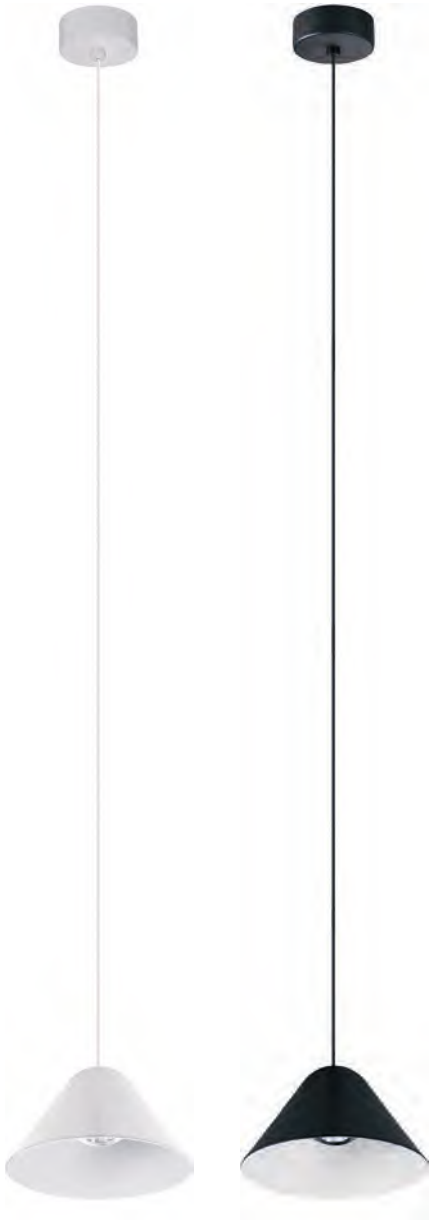

REFERENCE	K	LED WATT	LUMENS	FINISH
8465	3000K	5W	400lm	Blanco-White
8466	3000K	5W	400lm	Negro-Black
220-240V ~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium

46.20






REFERENCE	K	LED WATT	LUMENS	FINISH
8468	3000K	5W	400lm	Blanco-White
8469	3000K	5W	400lm	Negro-Black
220-240V ~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium


33.20






48.40

REFERENCE	K	LED WATT	LUMENS	FINISH
8467	3000K	5W	400lm	Negro/Oro-Gold/Black
220-240V~ 50/60Hz CRI:≥ 80			Aluminio-Aluminium	

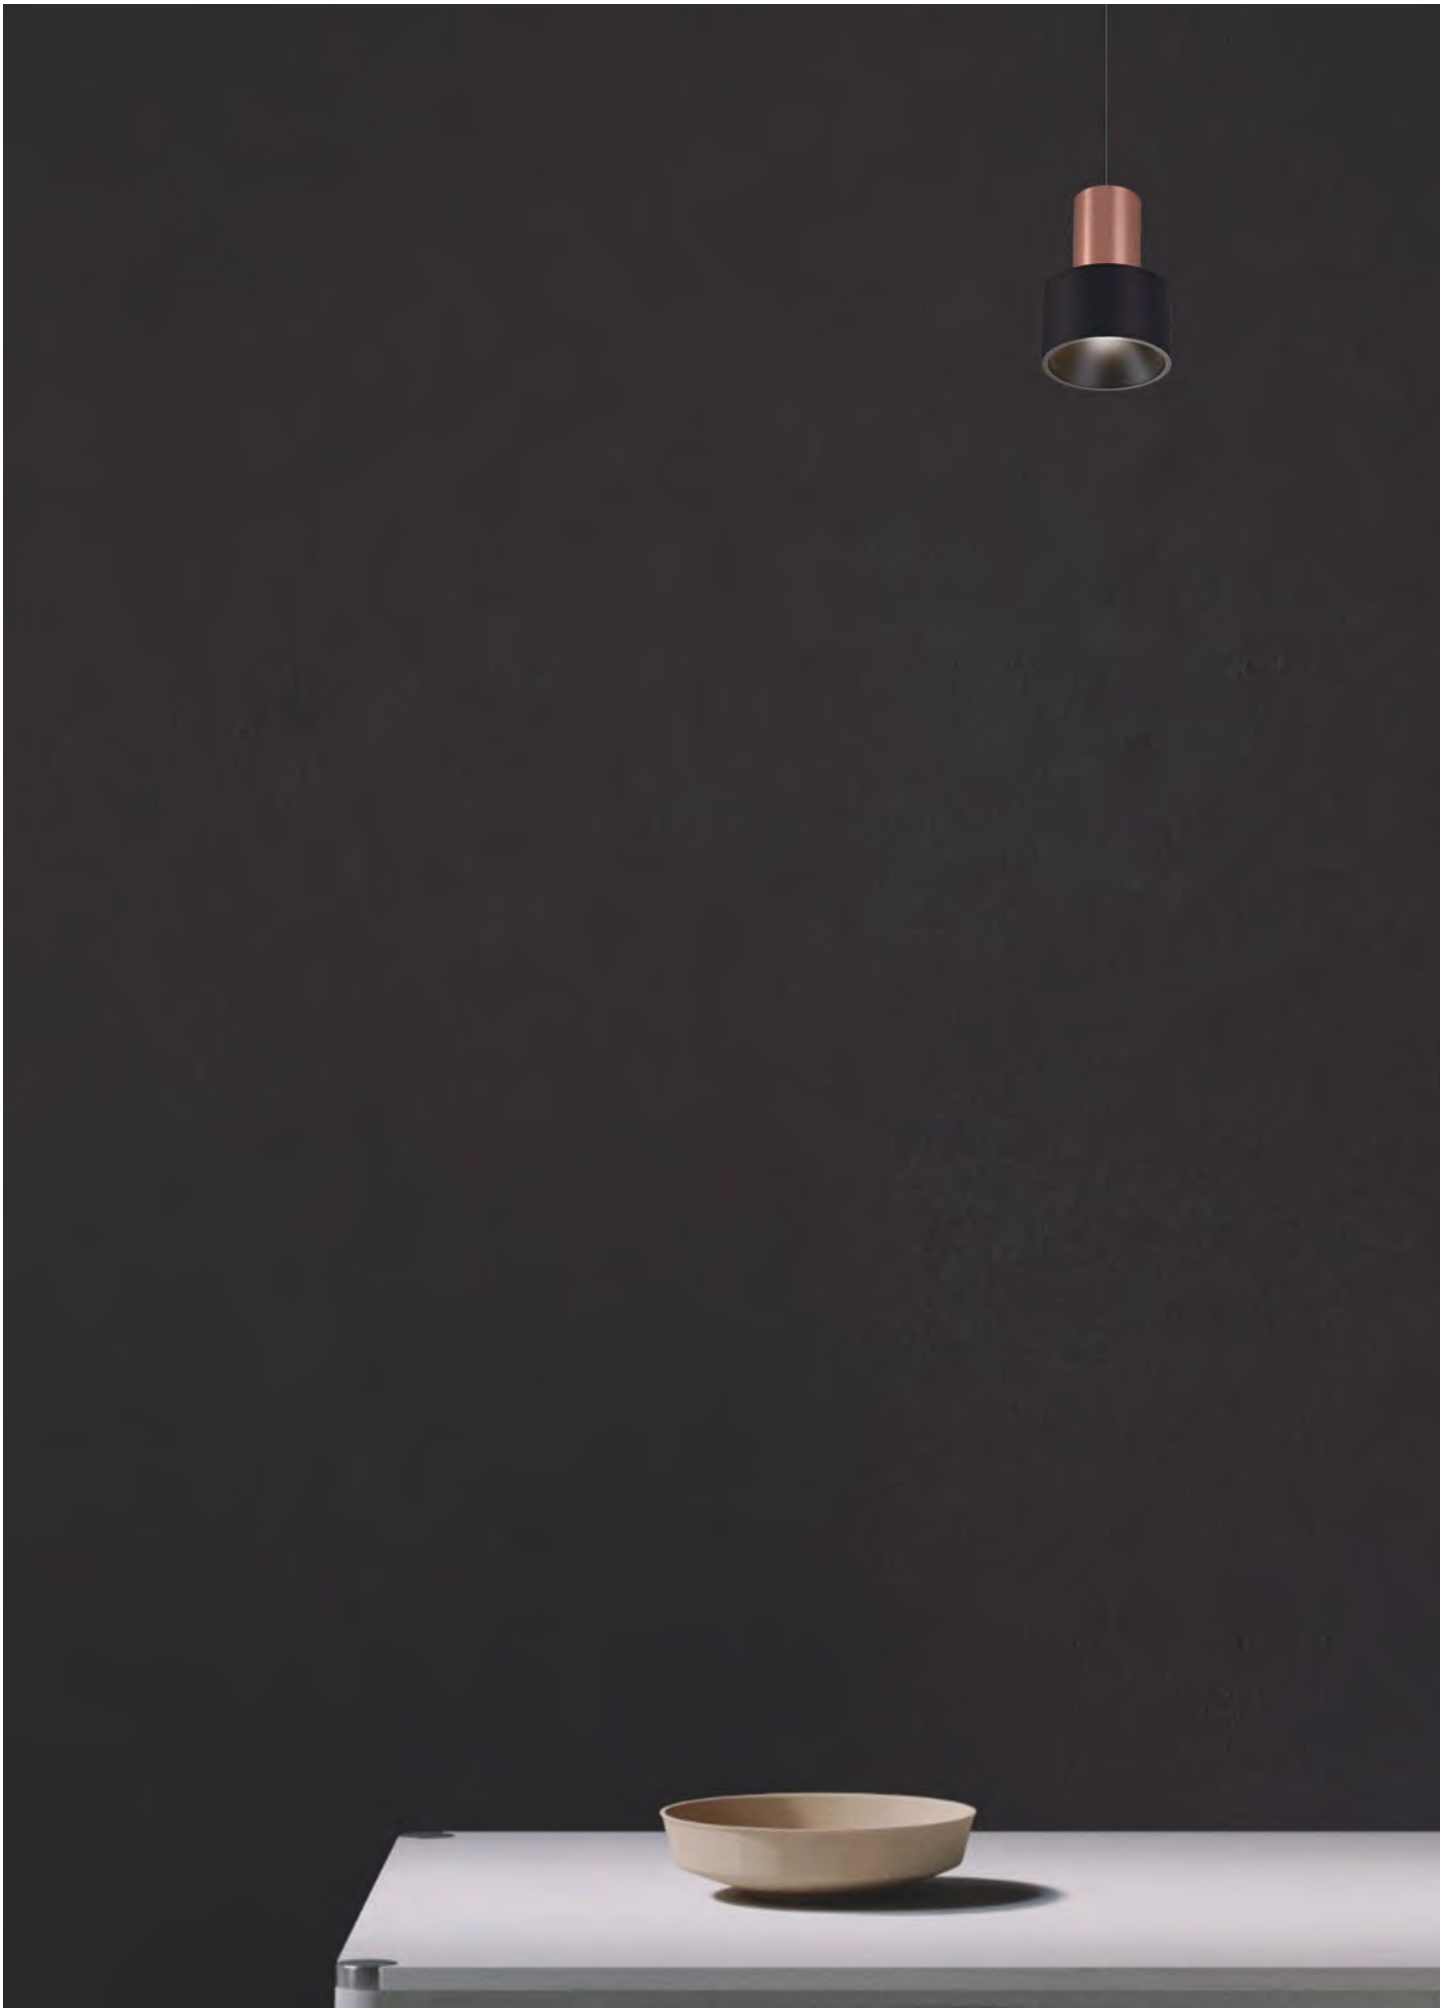

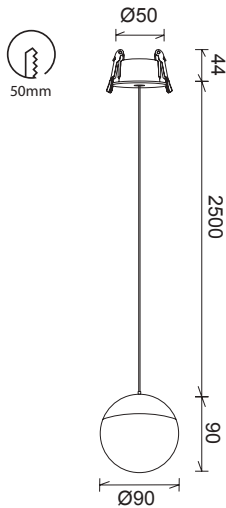

50.70
53.50

REFERENCE	K	LED WATT	LUMENS	FINISH
8435	3000K	10W	800lm	Blanco-White
8436	3000K	10W	800lm	Negro-Black
8437	3000K	10W	800lm	Oro-Gold
220-240V ~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium






50.70

53.50


REFERENCE	K	LED WATT	LUMENS	FINISH
8438	3000K	10W	800lm	Blanco-White
8439	3000K	10W	800lm	Negro-Black
8440	3000K	10W	800lm	Oro-Gold
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium




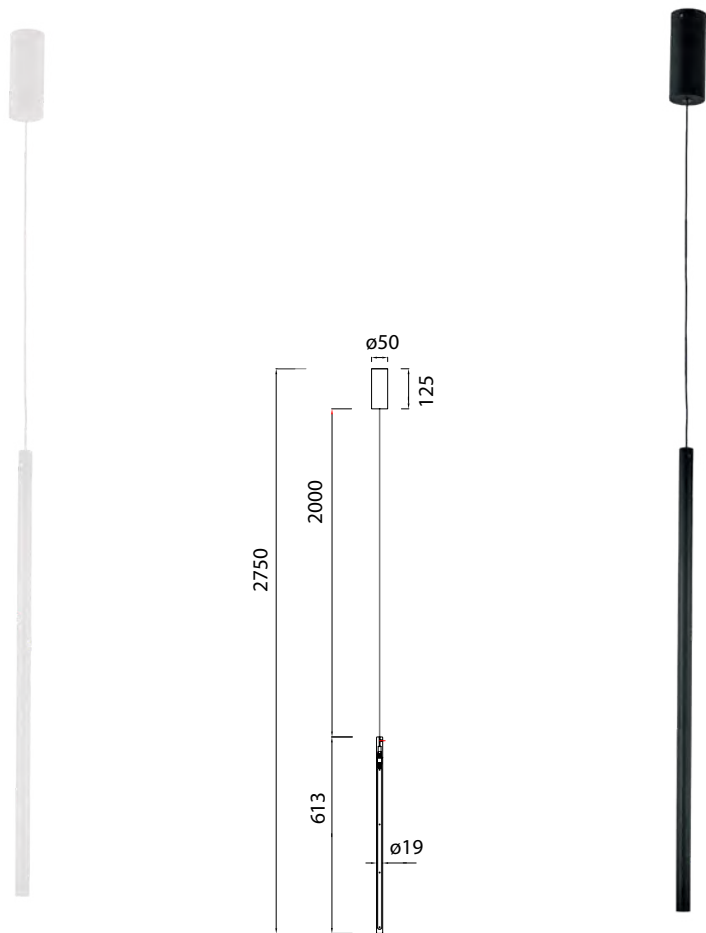

63.20

REFERENCE	K	LED WATT	LUMENS	FINISH
8482	3000K	11W	900lm	Blanco mate-Matt white
8483	3000K	11W	900lm	Negro mate-Matt black
220-240V~50/60Hz CRI≥ 80				Aluminio-Aluminium

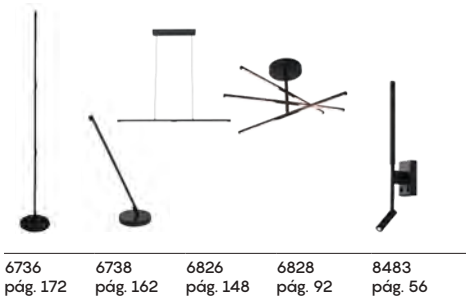



125.70

136.90

REFERENCE	BULB (No incl)	FINISH
8297	6L x GU10	Blanco mate-Matt white
8298	6L x GU10	Negro mate-Matt black
8486	6L x GU10	Oro+Negro-Gold+Black
máx. 10W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium




Bombillas recomendadas-Suggested bulbs

K	Wat LED	Reference
3000K	6W	R09196
4000K	6W	R09214
5000K	6W	R09197






7961 pág. 90	6281 pág. 180	6717 pág. 238	6283 pág. 60	7523 pág. 58	8295 pág. 284	7522 pág. 158	7520 pág. 156
-----------------	------------------	------------------	-----------------	-----------------	------------------	------------------	------------------



56.30

REFERENCE	K	LED WATT	LUMENS	FINISH
8564	3000K	7W	560lm	Blanco-White
8565	3000K	7W	560lm	Negro+Oro-Gold+Black
220-240V ~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium



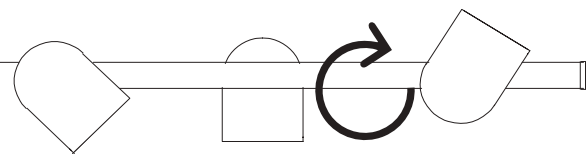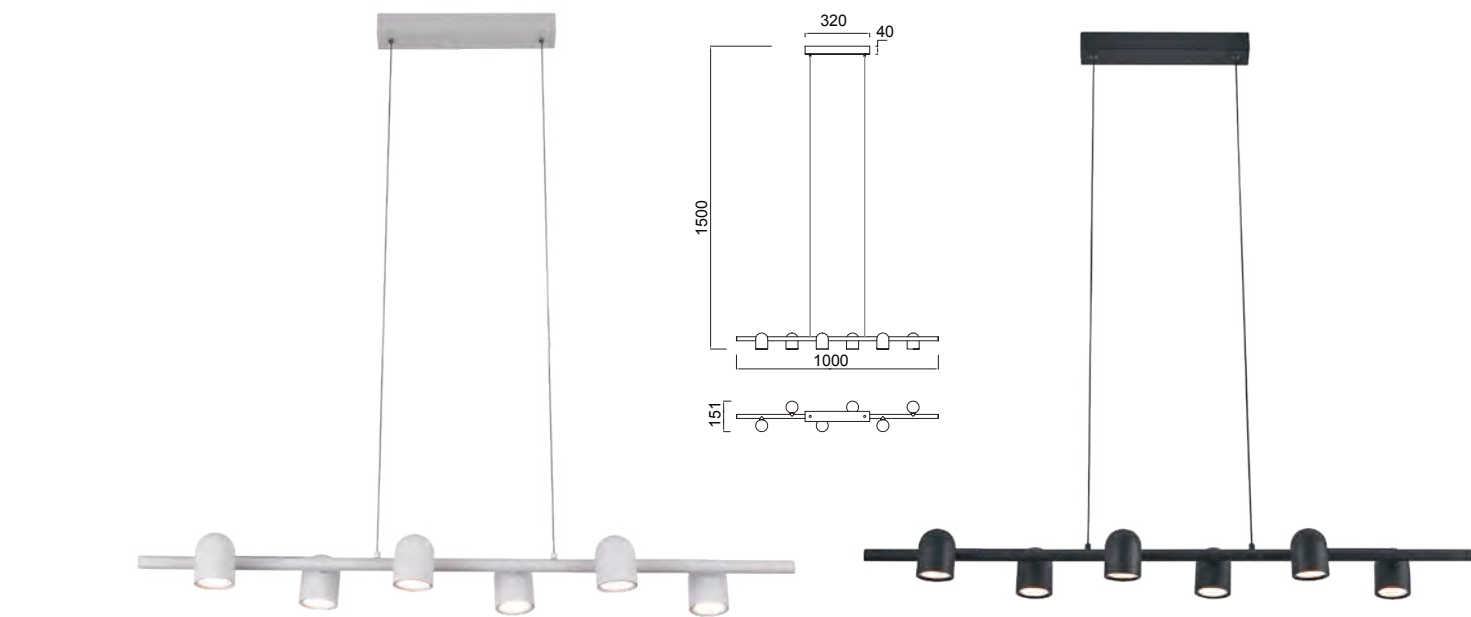


186.70

REFERENCE	BULB (No incl)	FINISH
7936	6L x GU10	Blanco-White
7937	6L x GU10	Negro-Black
máx. 12W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium



7595
pág.184



Bombillas recomendadas-Suggested bulbs

K	Wat	LED	On/Off	Dimmable	Lumens
2700K	7W		R09254	R09257	510lm
3000K	7W		R09255	R09258	540lm
4000K	7W		R09256	R09259	570lm



HANOK
by David Villalba

Lámpara lineal-Linear lamp



Indoor



104.60

113.50

REFERENCE	K	LED WATT	LUMENS	FINISH
7542	3000K	38W	2850lm	Blanco-White
7546	3000K	38W	2850lm	Negro-Black
7569	3000K	38W	2850lm	Arena-Sabbia
7543	4000K	38W	3000lm	Blanco-White
7547	4000K	38W	3000lm	Negro-Black
On-off		220-240V~ 50/60Hz CRI≥ 80		Aluminio-Aluminium

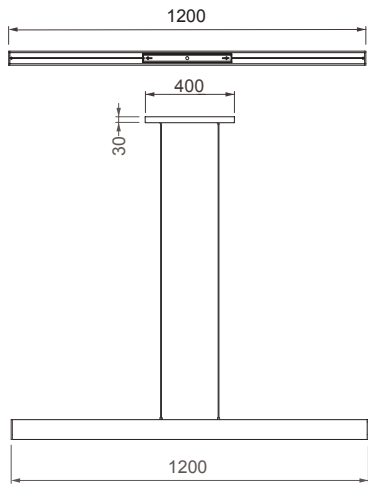

7548
pág.130

7951
pág. 88


7953
pág. 30




3000K 100° 38W

4000K 100° 38W


Luminous Intensity Distribution Curve

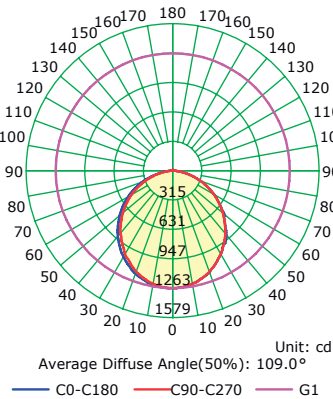


The Average Illuminance Effective Figure

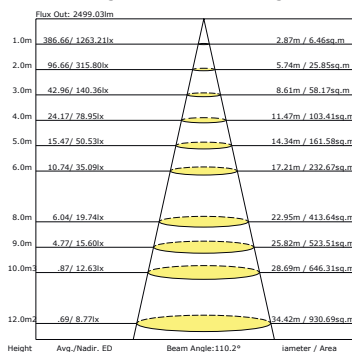

Luminous Intensity Distribution Curve


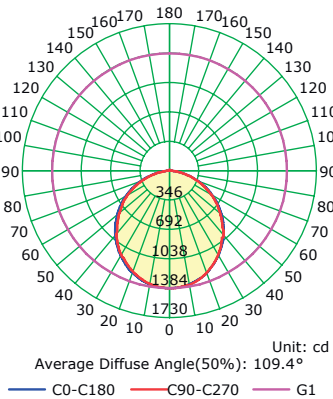


The Average Illuminance Effective Figure

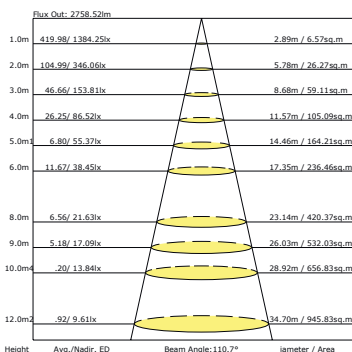


150.10

REFERENCE	K	LED WATT	LUMENS	FINISH
7540	3000K	38W	2650lm	Blanco-White
7544	3000K	38W	2650lm	Negro-Black
7541	4000K	38W	2800lm	Blanco-White
7545	4000K	38W	2800lm	Negro-Black
UGR<16		220-240V~ 50/60Hz CRI≥ 90		Aluminio-Aluminium

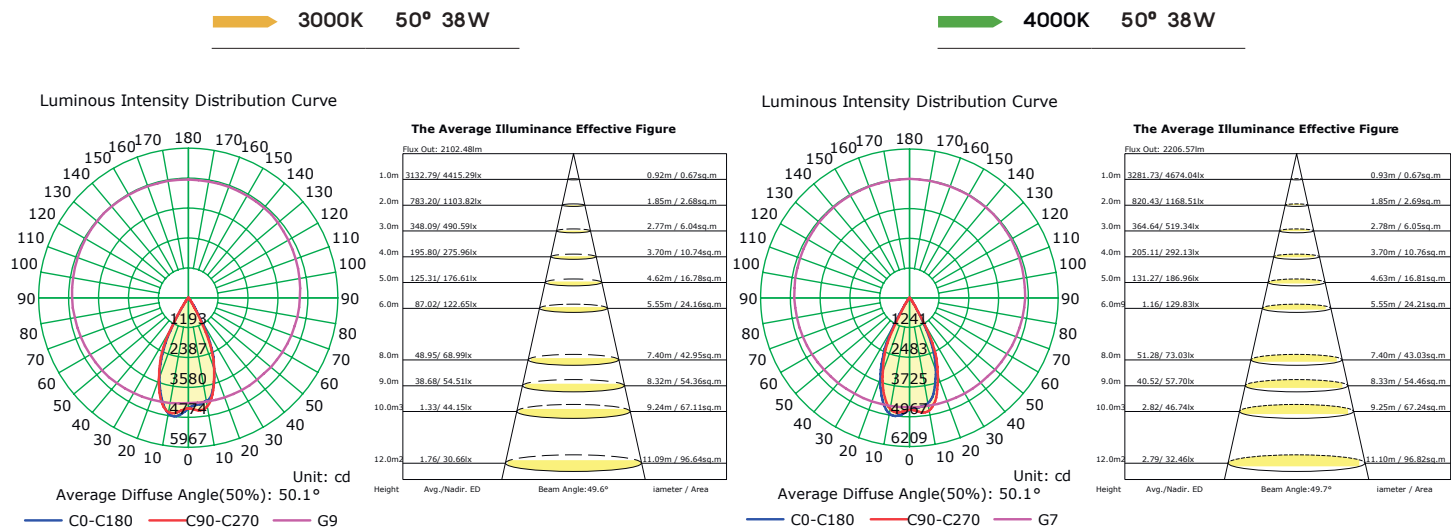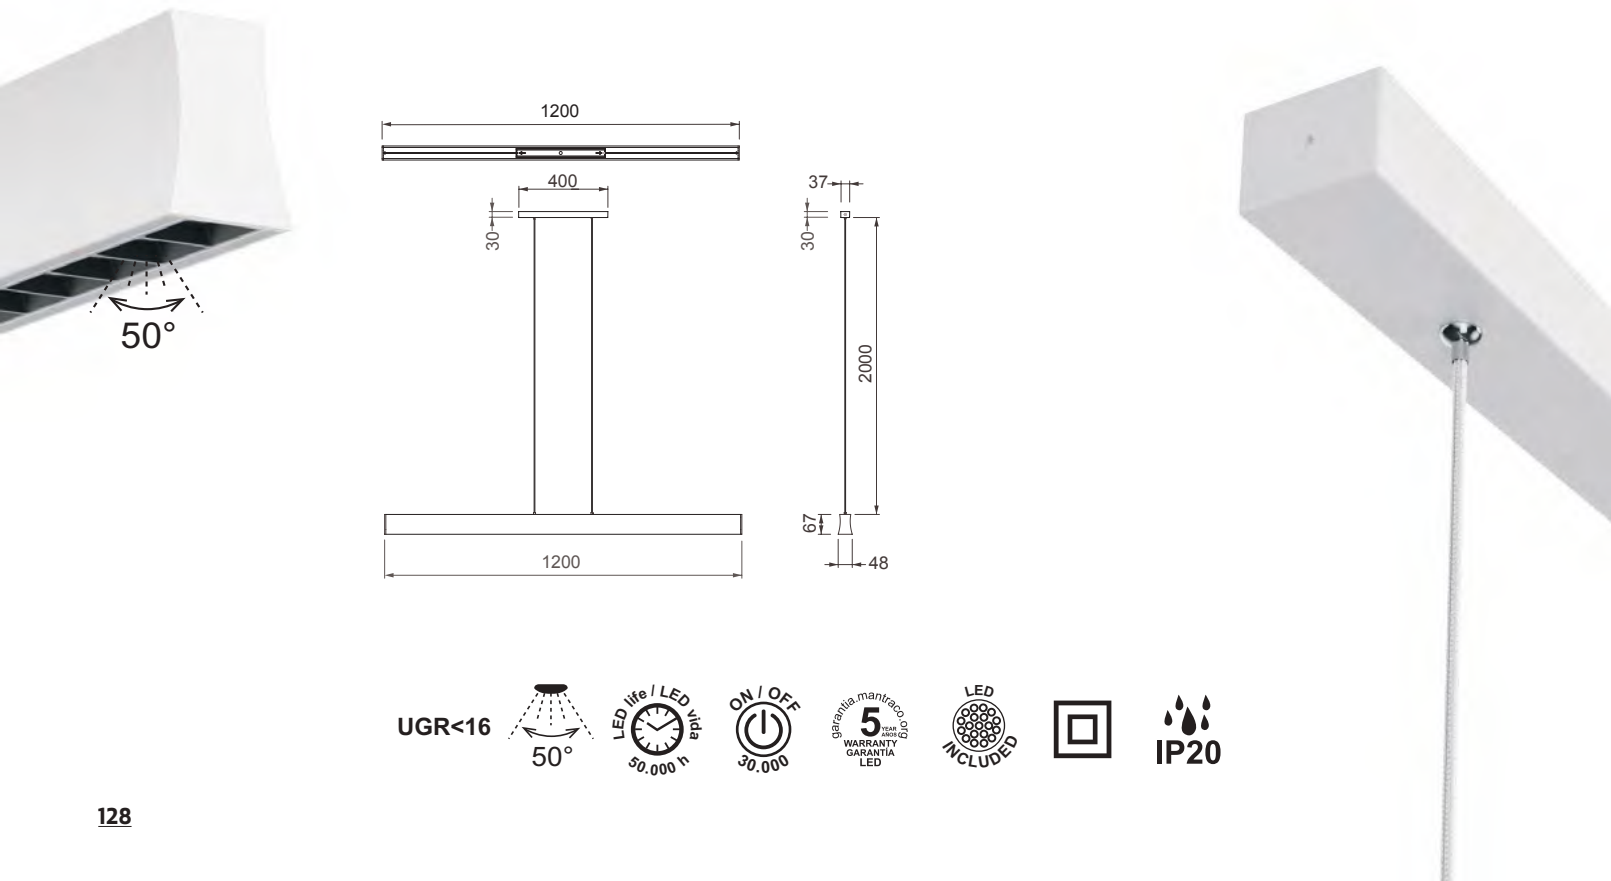


HANOK

by David Villalba

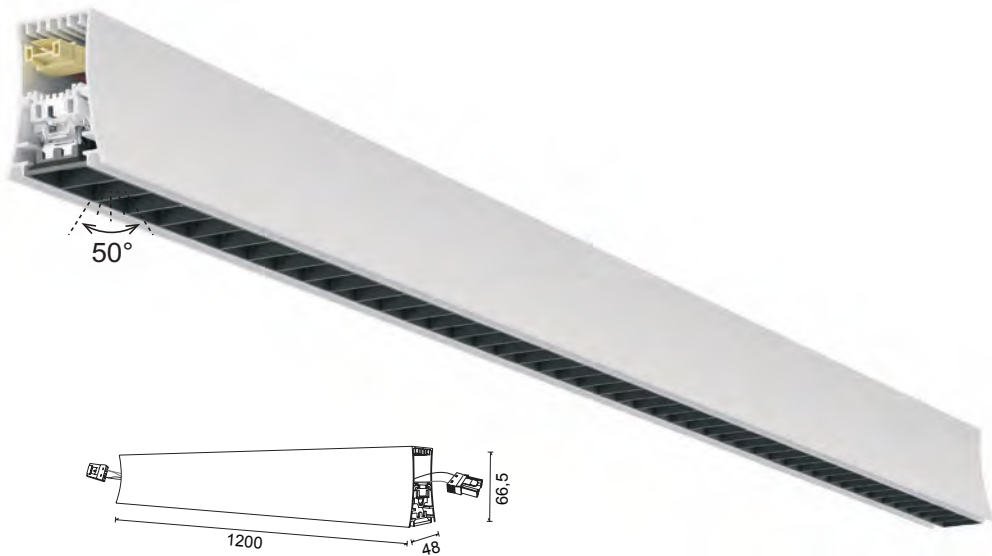



143

REFERENCE	K	LED WATT	LUMENS	FINISH
7548	3000K	38W	2650lm	Blanco-White
7549	4000K	38W	2800lm	Blanco-White
	UGR<16	220-240V~ 50/60Hz CRI≥ 80		Aluminio-Aluminium

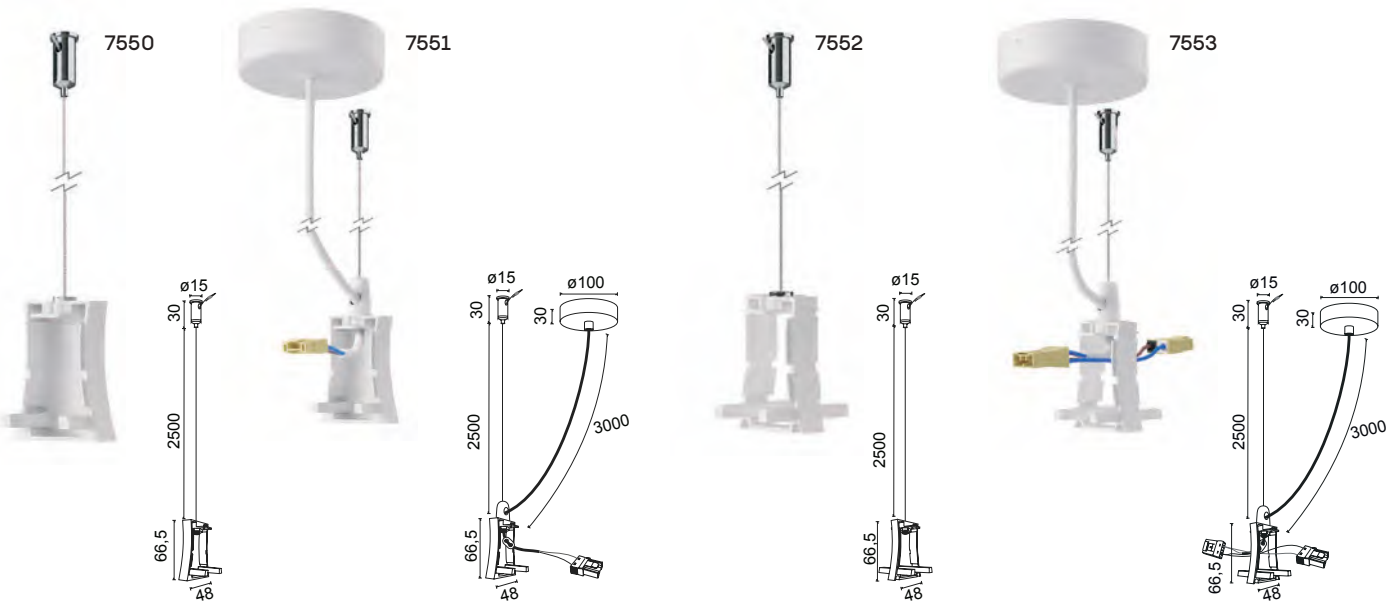


REFERENCE	
7550	Tapa lateral con cable fijación-Side cover white with fixing wire
7551	Tapa lateral con cable alimentación y florón-Side cover white with ac wire & rosette
7552	Conexión intermedia con cable fijación-Middle connection white with fixing wire
7553	Conexión intermedia con cable alimentación y florón - Middle connection white with ac wire & rosette

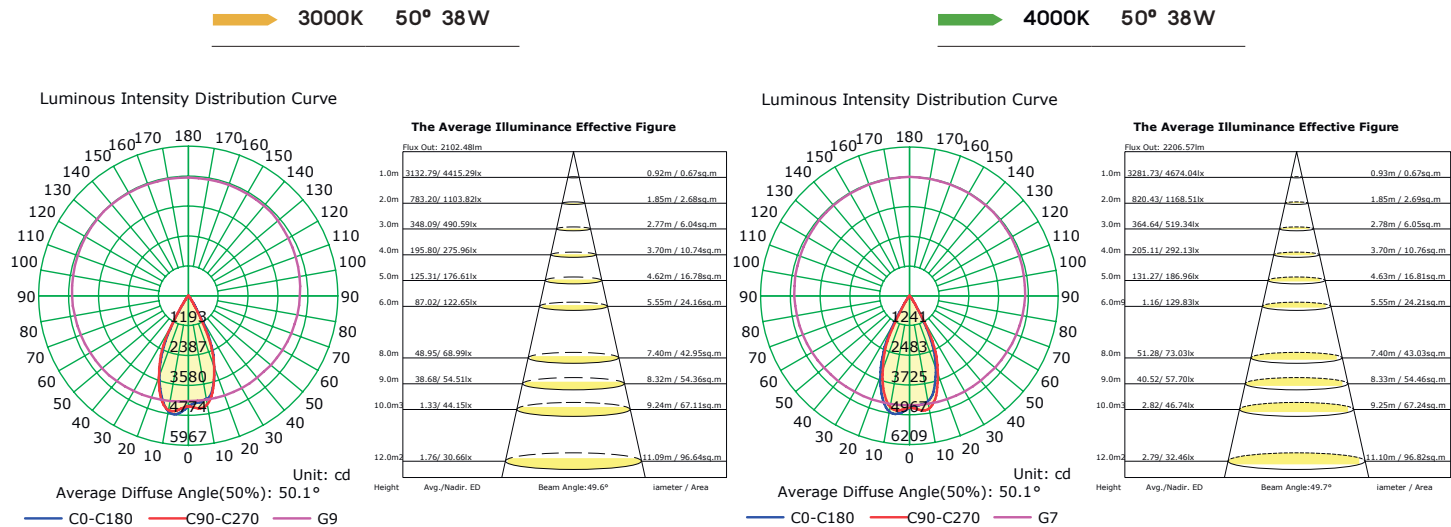

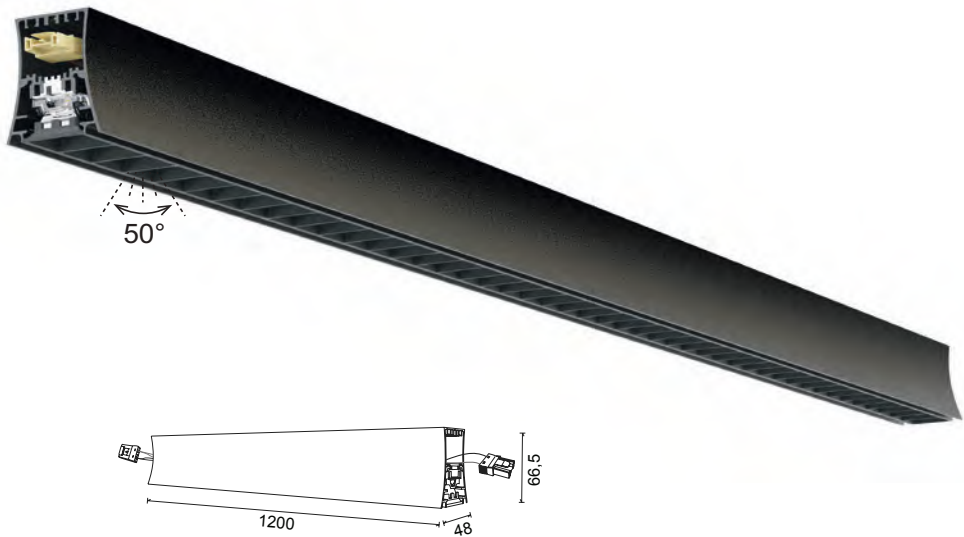

REFERENCE	K	LED WATT	LUMENS	FINISH
7554	3000K	38W	2650lm	Negro-Black
7555	4000K	38W	2800lm	Negro-Black
UGR<16		220-240V~ 50/60Hz CRI≥ 80		Aluminio-Aluminium

143€

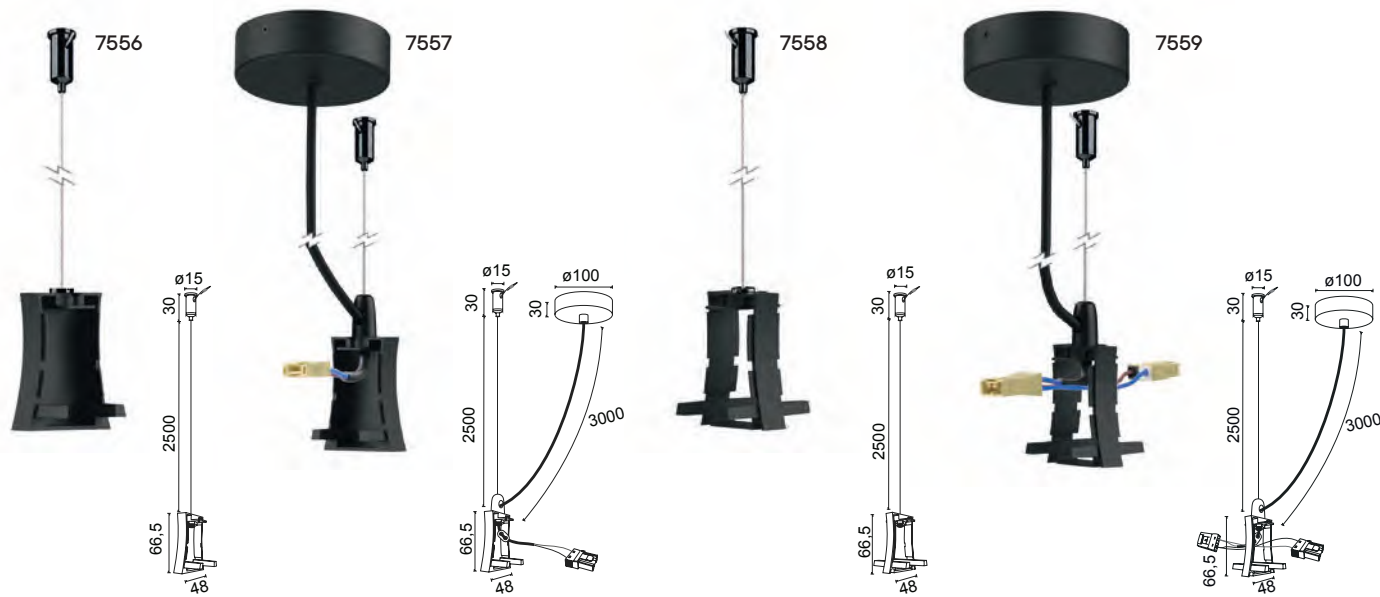


REFERENCE	
7556	Tapa lateral con cable fijación-Side cover white with fixing wire
7557	Tapa lateral con cable alimentación y florón-Side cover white with ac wire & rosette
7558	Conexión intermedia con cable fijación-Middle connection white with fixing wire
7559	Conexión intermedia con cable alimentación y florón - Middle connection white with ac wire & rosette




3000K 50° 38W

4000K 50° 38W


Luminous Intensity Distribution Curve

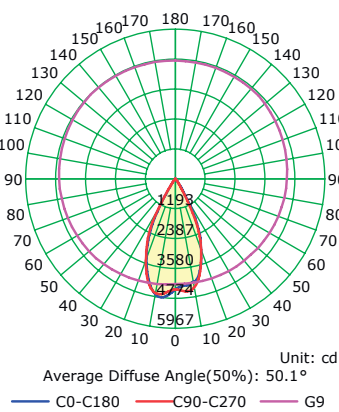


The Average Illuminance Effective Figure

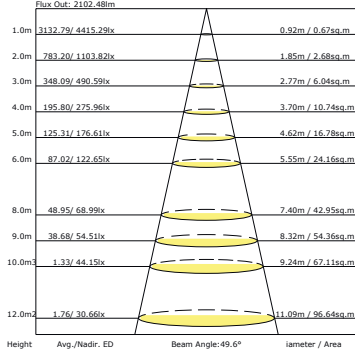

Luminous Intensity Distribution Curve

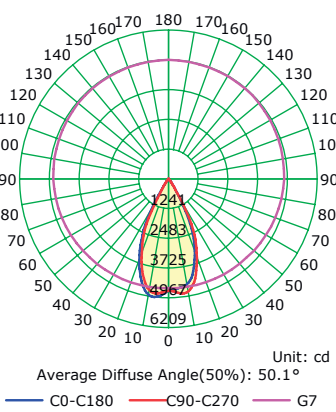

The Average Illuminance Effective Figure

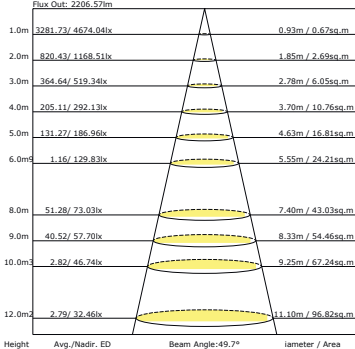


PAGODA
by David Villalba

Colgante-Pendant lamp

Indoor
UGR<16

CRI≥90

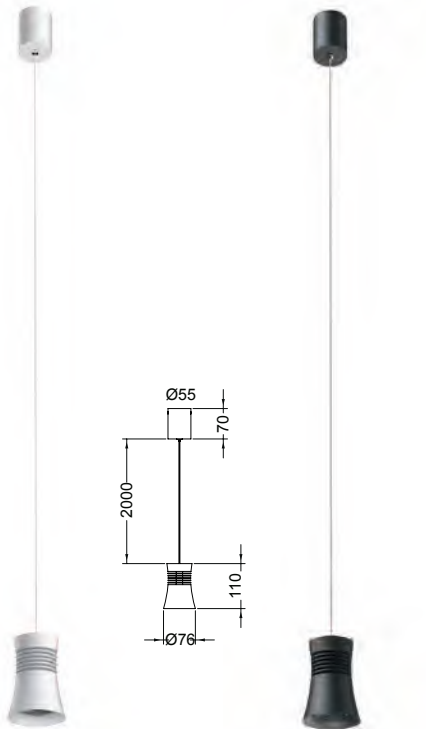

REFERENCE	K	LED WATT	LUMENS	FINISH
7784	3000K	12,5W	950lm	Blanco-White
7786	3000K	12,5W	950lm	Negro-Black
7785	4000K	12,5W	1050lm	Blanco-White
7787	4000K	12,5W	1050lm	Negro-Black
UGR<16		220-240V~ 50/60Hz CRI:≥ 90		Aluminio-Aluminium

67.30



7788
pág.232





PAGODA

by David Villalba



53.50

REFERENCE	BULB (No incl)	FINISH
7790	1L x GU10	Blanco-White
7791	1L x GU10	Negro-Black
máx. 12W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium



Bombillas recomendadas-Suggested bulbs

K	Wat	LED	On/Off	Dimmable	Lumens
 2700K	7W		R09254	R09257	510lm
 3000K	7W		R09255	R09258	540lm
 4000K	7W		R09256	R09259	570lm



ORION
by Hugo Tejada

Lámpara de techo-Pendant lamp

Indoor




REFERENCE	K	LED WATT	LUMENS	FINISH
7475	3000K	24W	1770 lm	Negro/cuero-Black/antique brass
220-240V~ 50/60Hz CRI≥ 80				Aluminio/Acrílico-Aluminium/Acrylic

218.10€



8128
pág.22

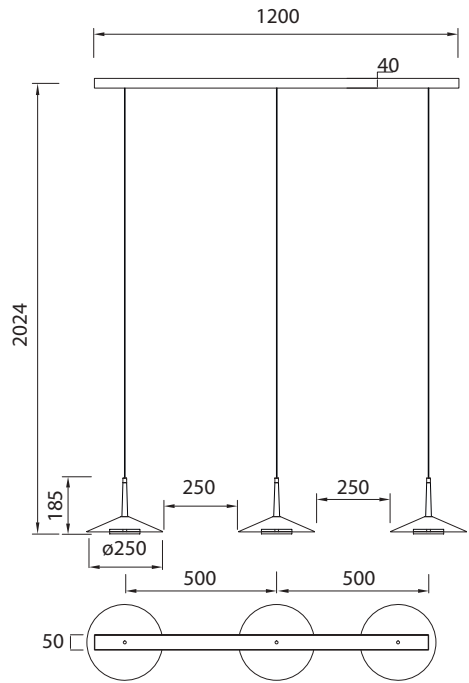

ORION
by Hugo Tejada

Lámpara de techo-Pendant lamp

Indoor



REFERENCE	K	LED WATT	LUMENS	FINISH
7476	3000K	32W	2360lm	Negro/cuero-Black/antique brass
		220-240V~ 50/60Hz	CRi≥ 80	Aluminio/Acrílico-Aluminium/Acrylic

269.10€



8128
pág.22

DRIVER
TUV



ORION
by Hugo Tejada


Lámparas de techo-Pendant lamp

Indoor

269.50

REFERENCE	K	LED WATT	LUMENS	FINISH
7307	3000K	32W	2360lm	Negro/cuero-Black/antique brass
	12 und	reference 7308	included	Blocacables-WireLocker
		220-240V~ 50/60Hz CRI≥ 80		Aluminio/Acrílico-Aluminium/Acrylic

7308 Blocacables-WireLocker 1 und

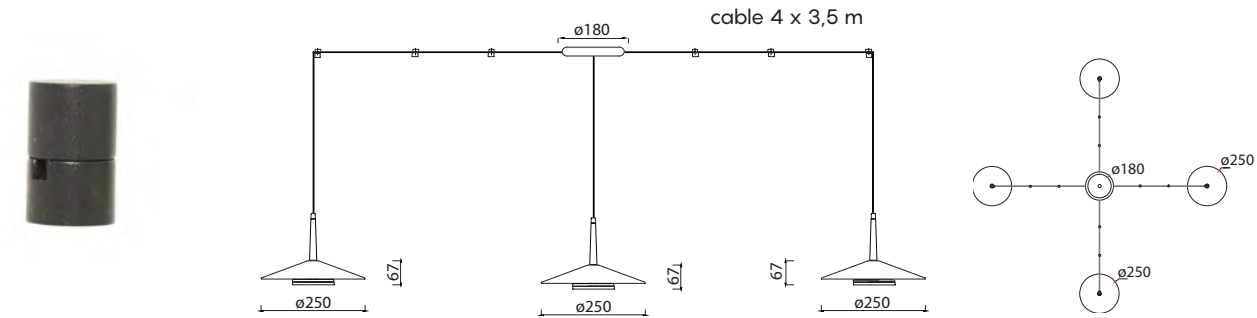

ORION
by Hugo Tejada


Lámparas de techo-Pendant lamp

Indoor



77.70

REFERENCE	K	LED WATT	LUMENS	FINISH
7305	3000K	8W	590lm	Negro/cuero-Black/antique brass
220-240V~ 50/60Hz CRI≥ 80				Aluminio/Acrílico-Aluminium/Acrylic

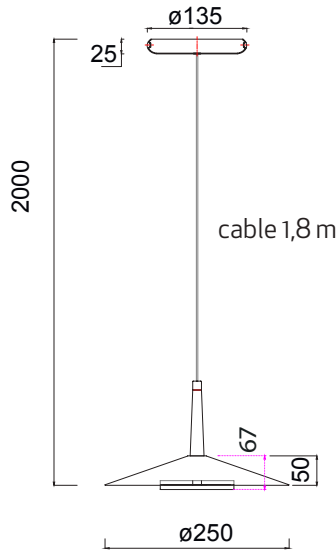

ORION
by Hugo Tejada

Lámparas de techo-Pendant lamp


Indoor



143.10

REFERENCE	K	LED WATT	LUMENS	FINISH
7306	3000K	16 W	1180lm	Negro/cuero-Black/antique brass
	6 und	reference 7308	included	Blocacables-WireLocker
		220-240V~ 50/60Hz CRI≥ 80		Aluminio/Acrílico-Aluminium/Acrylic

7308 Blocacables-WireLocker 1 und

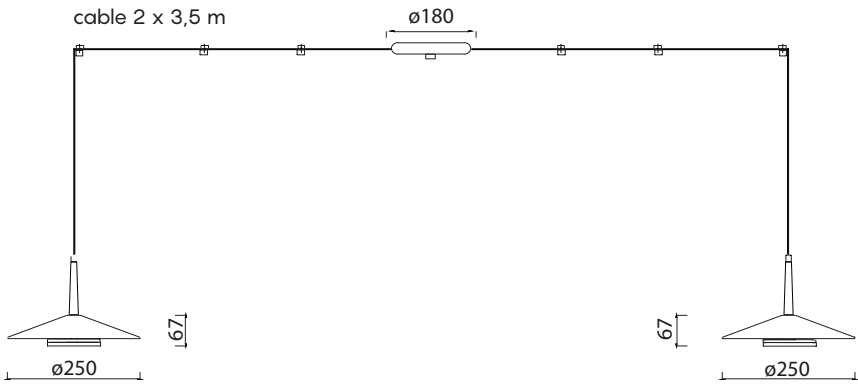



DRIVER
TÜV

Registered N° 007663331-0014



97.10€



REFERENCE	K	LED WATT	LUMENS	FINISH
6825	3000K	21W	1475lm	Blanco Mate-Matt white
6826	3000K	21W	1475lm	Negro Mate-Matt black
220-240V~ 50/60Hz CRI≥ 80				Aluminio-Aluminium

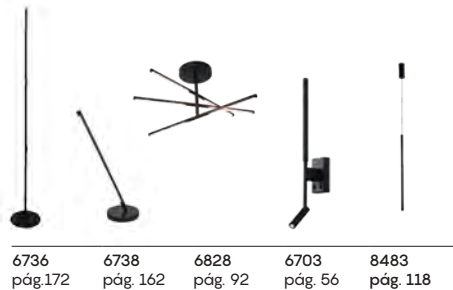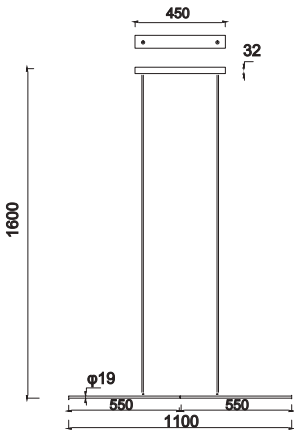

36.20

20.20

REFERENCE	BULB NO INCLUDED	FINISH	DIAMETER (ø):
5622	1L x E27	Blanco mate-Matt White	ø 120
5624	1L x E27	Plata-Silver	ø 120
5623	1L x E27	Blanco mate-Matt White	ø 95
5625	1L x E27	Plata-Silver	ø 95
máx. 20W LED (No incl)		100-240V~50/60Hz Metal-Metal	

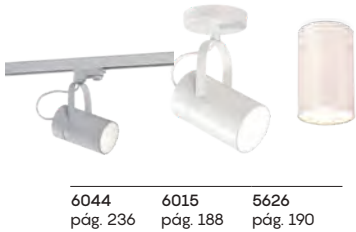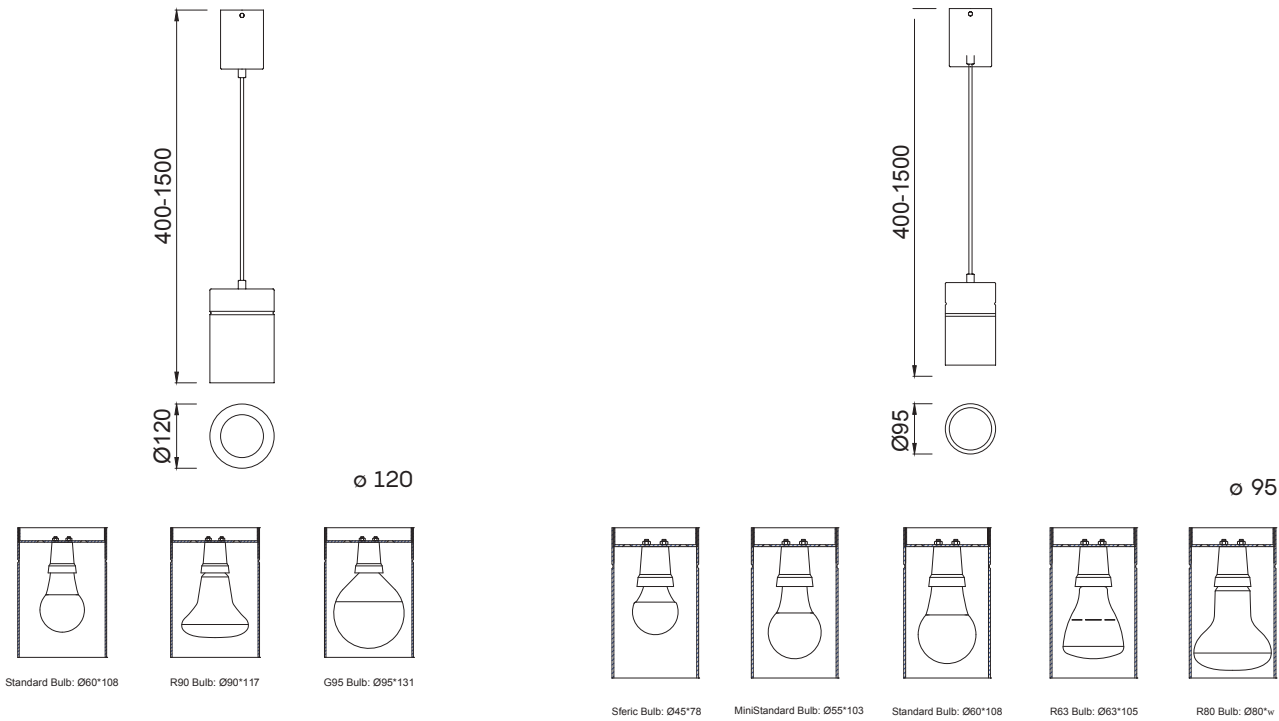




FLORÓN
empotrable

Base empotrada para colgantes-Recessed base for pendants

Indoor



REFERENCE	FINISH
7855	Blanco-White
7856	Negro-Black
7857	Plata-Silver
7858	Oro-Gold
7859	Cuero-Antique Brass
	Hierro-Iron

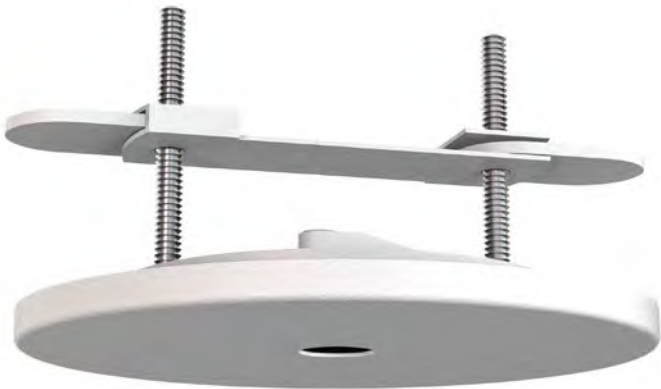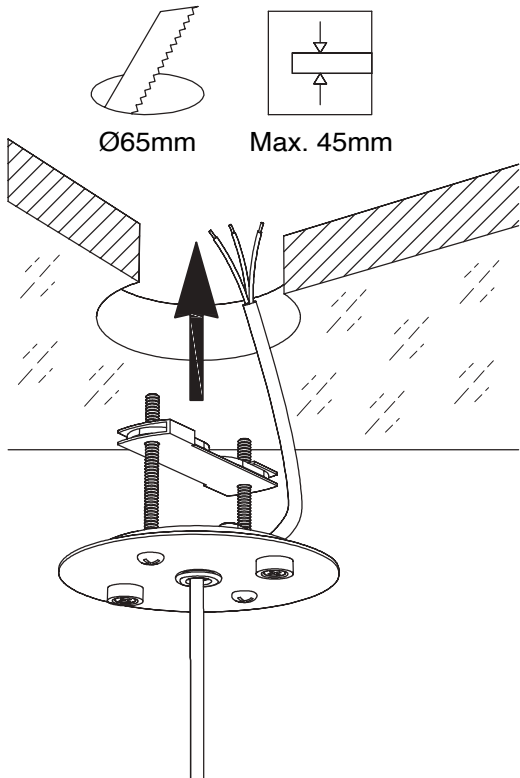

Sobremesa

Table lamp

Pie de salón

Floor lamp




39.30



43.30



REFERENCE	BULB (No incl)	FINISH	SIZE
8491	1L x GU10	Oro+Negro-Gold+Black	350 mm
8492	1L x GU10	Oro+Negro-Gold+Black	520 mm
máx. 10W LED (No incl) 100-240V~50/60Hz Aluminio-Aluminium			

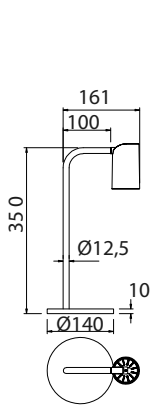

Bombillas recomendadas-Suggested bulbs

K	Wat LED	Reference
3000K	6W	R09196
4000K	6W	R09214
5000K	6W	R09197






40.50


45.70

REFERENCE	BULB (No incl)	FINISH
7520	1L x GU10	Blanco arena-Sand white
7521	1L x GU10	Blanco arena-Sand white
7515	1L x GU10	Negro mate-Matt black
7516	1L x GU10	Negro mate-Matt black
máx. 10W LED (No incl) 100-240V~50/60Hz Aluminio-Aluminium		



Bombillas recomendadas-Suggested bulbs

K	Wat LED	Reference
3000K	6W	R09196
4000K	6W	R09214
5000K	6W	R09197

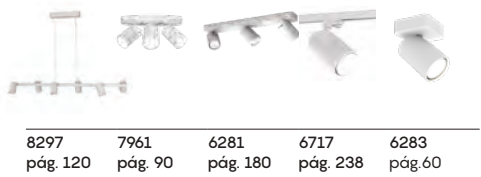




73

68.90

REFERENCE	K	LED WATT	LUMENS	FINISH
7510	3000K	6 W	390lm	Negro arena-Sand black
7511	3000K	6 W	390lm	Negro arena-Sand black
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium

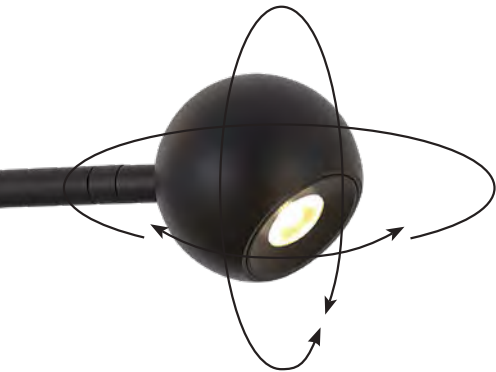

7512
pág. 170

7513
pág. 42



360°




68.20

REFERENCE	K	LED WATT	LUMENS	FINISH
6737	3000K	11W	900lm	Blanco mate-Matt white
6738	3000K	11W	900lm	Negro mate-Matt black
220-240V ~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium



6736 pág.172	6826 pág. 148	6828 pág. 92	6703 pág. 56	8483 pág. 118



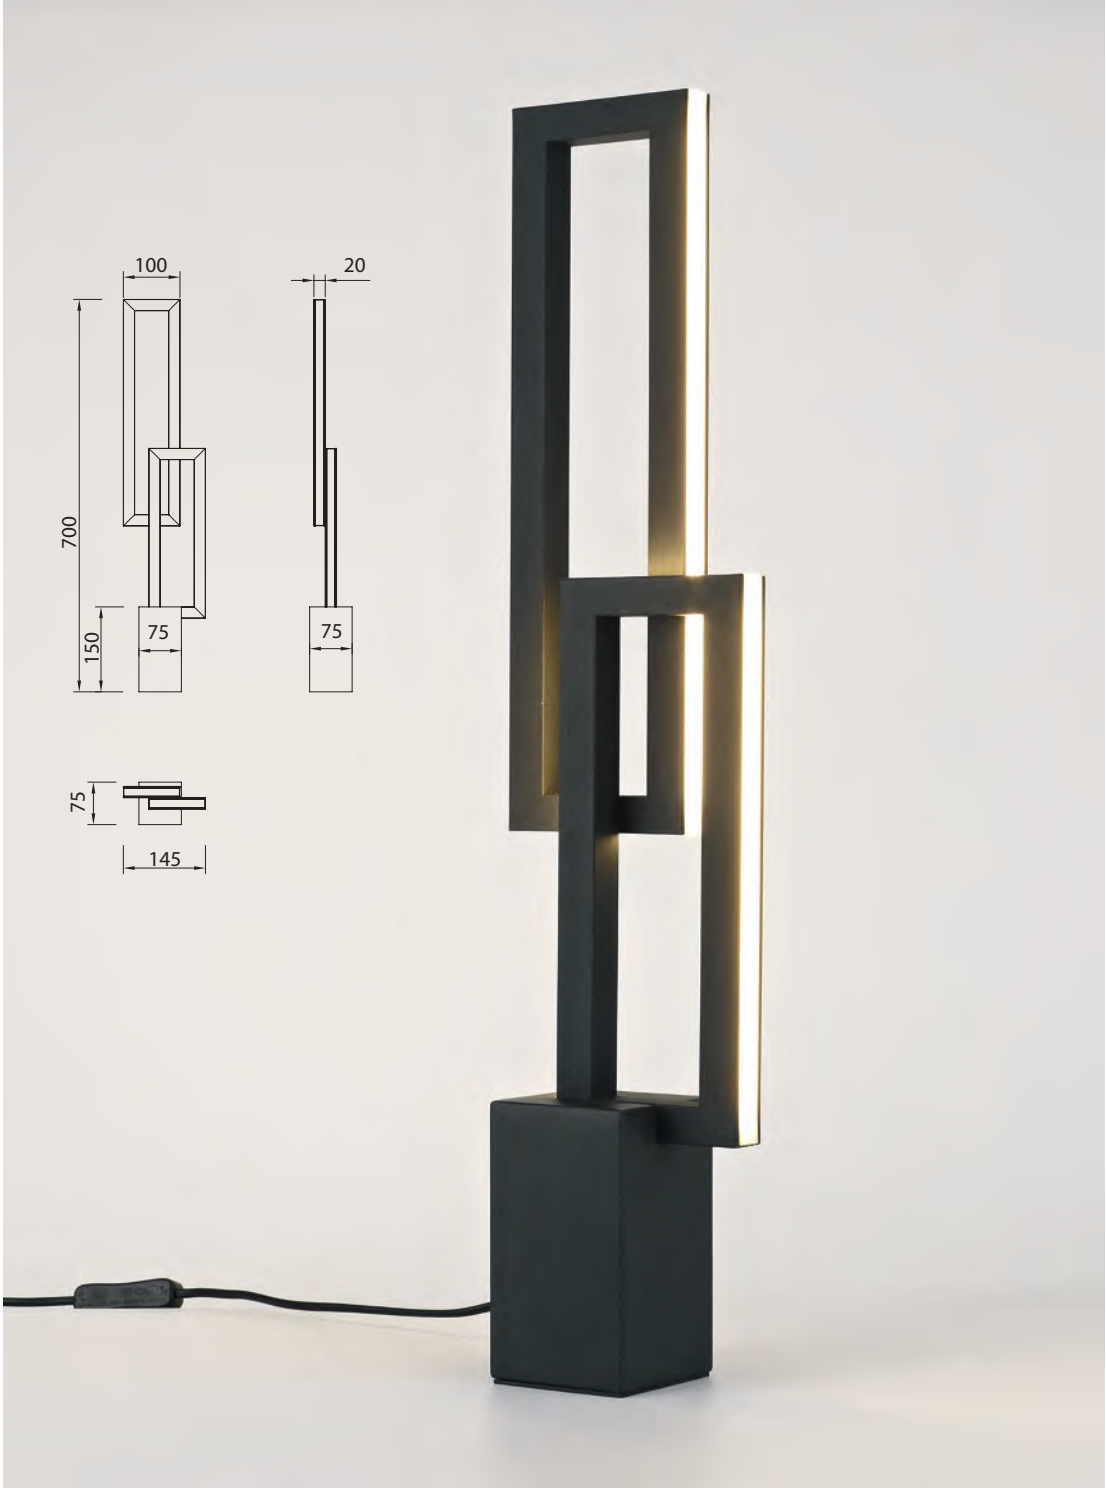


REFERENCE	K	LED WATT	LUMENS	FINISH
7464	3000K	18W	1380lm	Negro-Black
100-240V~50/60Hz CRI:≥ 80 Aluminium/Iron/Acrílico-Aluminium/Iron/Acrylic				


116.25



REFERENCE	K	LED WATT	LUMENS	FINISH
6562	3000K	18W	1380lm	Blanco-White
100-240V~50/60Hz CRI:≥ 80 Aluminium/Iron/Acrílico-Aluminium/Iron/Acrylic				

116.25

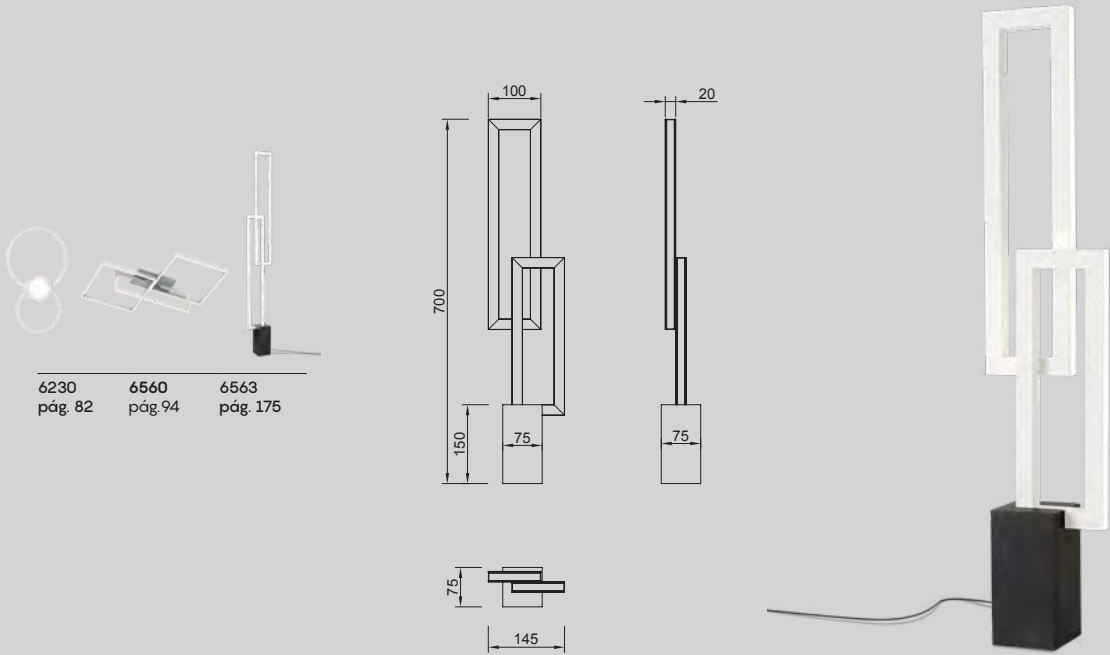


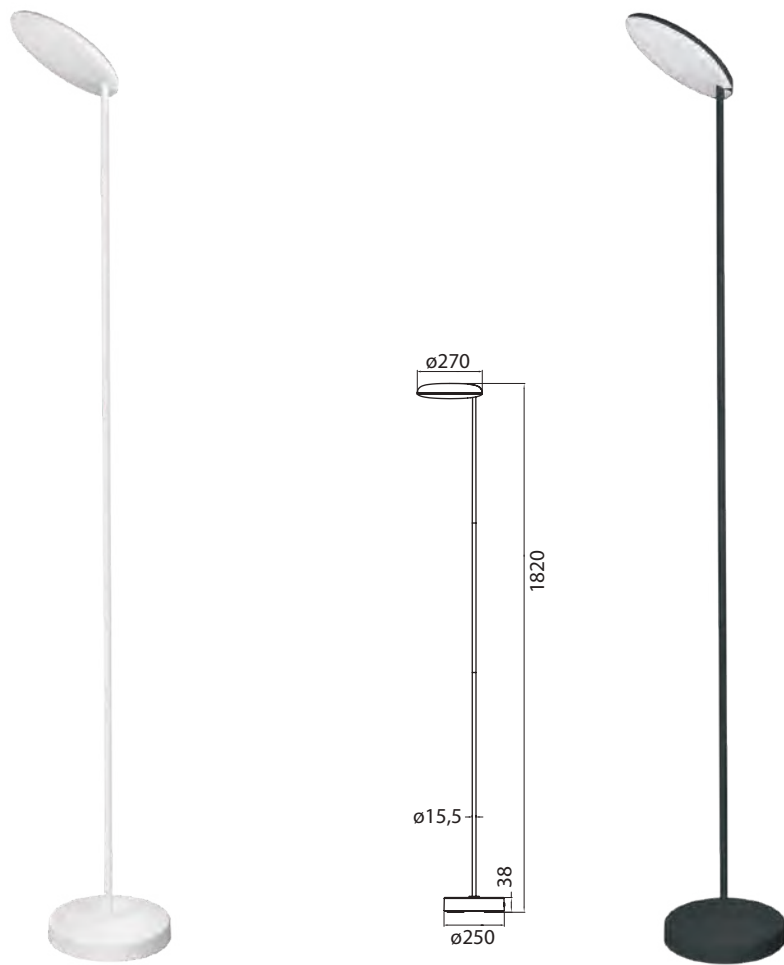

REFERENCE	CCT switch	LED WATT	LUMENS	FINISH
8510	3000K	30W	2100lm	Blanco-White
8511	3000K	30W	2100lm	Negro-Black
100-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium

112.90



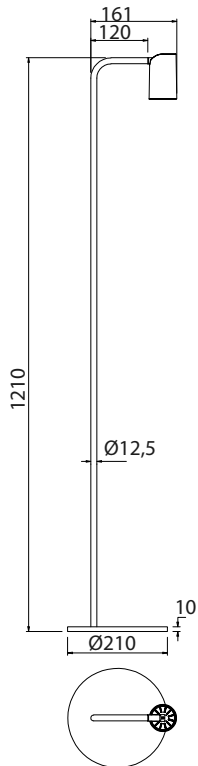

REFERENCE	BULB (No incl)	FINISH
7522	1L x GU10	Blanco arena-Sand white
7517	1L x GU10	Negro mate-Matt black
New 8493	1L x GU10	Oro+Negro-Gold+Black
máx. 10W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium



7523
pág. 58

8295
pág. 284



8297
pág. 120

7961
pág. 90

6281
pág. 180



6717
pág. 238

6283
pág. 60

7520
pág. 158



Bombillas recomendadas-Suggested bulbs

K	Wat LED	Reference
3000K	6W	R09196
4000K	6W	R09214
5000K	6W	R09197






114.40

REFERENCE	K	LED WATT	LUMENS	FINISH
7512	3000K	6W	390lm	Negro arena-Sand black
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium





Indoor
360°

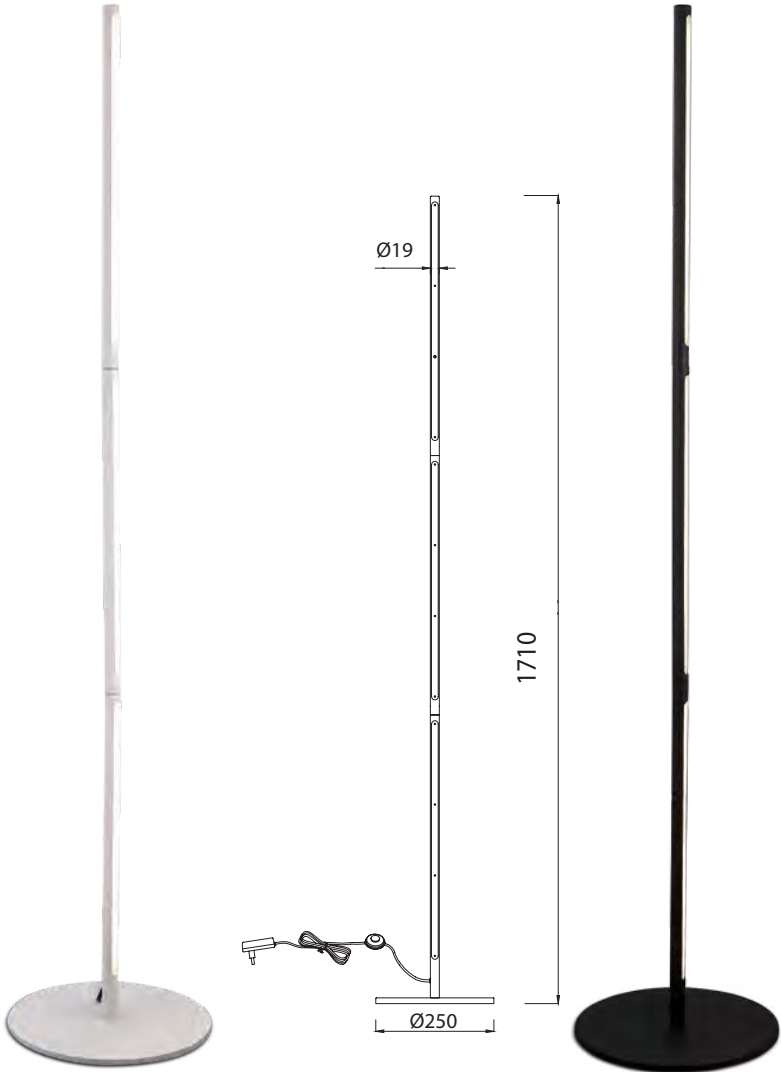

REFERENCE	K	LED WATT	LUMENS	FINISH
6735	3000K	25W	1950lm	Blanco mate-Matt white
6736	3000K	25W	1950lm	Negro mate-Matt black
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium


170.70

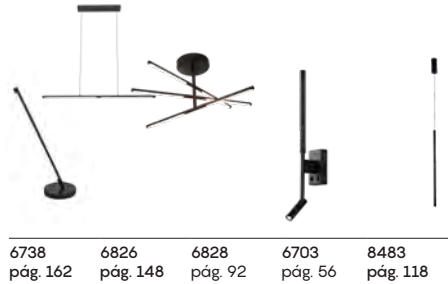

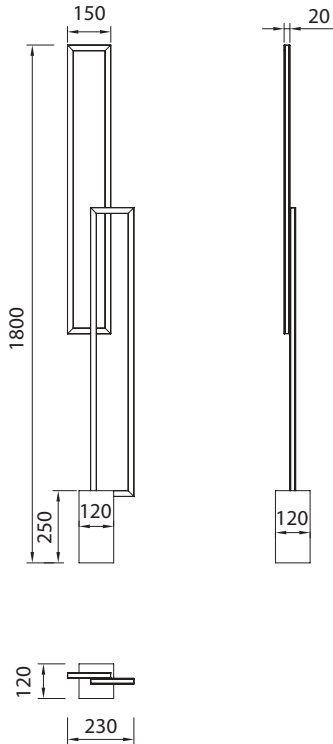


315.70

REFERENCE	K	LED WATT	LUMENS	FINISH	
7465	3000K	48W	3800lm	Negro-Black	Dimmable
		220-240V~50/60Hz CRI:≥ 80		Aluminium/Iron/Acrílico-Aluminium/Iron/Acrylic	

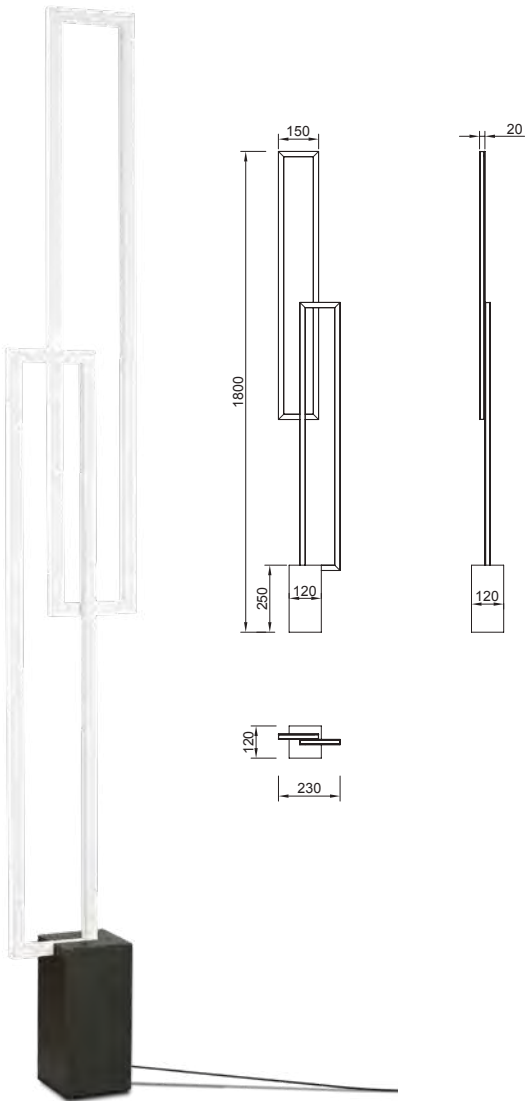

315.70

REFERENCE	K	LED WATT	LUMENS	FINISH	
6563	3000K	48W	3800lm	Blanco-White	Dimmable
		220-240V~50/60Hz CRI:≥ 80		Aluminium/Iron/Acrílico-Aluminium/Iron/Acrylic	



6230
pág.82

6560
pág.94

6562
pág.165




Foco Superficie

Spotlight


SPLIT
New

Indoor

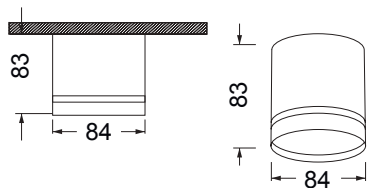

17€

REFERENCE	BULB (No incl)	FINISH
8658	1L x GX53	Blanco-White
8659	1L x GX53	Negro-Black
máx. 12W LED (No incl) 100-240V~50/60Hz Aluminio-Aluminium		



Bombillas recomendadas-Suggested bulbs

K	Wat	LED	Ref	Lumens
 3000K	12W		R09248	930lm
 4000K	12W		R09249	960lm









17.30

39.10

57.85

79.10

REFERENCE	BULB (No incl)	FINISH
6283	1L x GU10	Blanco mate-Matt white
6713	1L x GU10	Negro mate-Matt black
New 8490	1L x GU10	Oro-Gold
6282	2L x GU10	Blanco mate-Matt white
6712	2L x GU10	Negro mate-Matt black
New 8489	2L x GU10	Oro-Gold
6281	3L x GU10	Blanco mate-Matt white
6711	3L x GU10	Negro mate-Matt black
New 8488	3L x GU10	Oro-Gold
6280	4L x GU10	Blanco mate-Matt white
6710	4L x GU10	Negro mate-Matt black
New 8487	4L x GU10	Oro-Gold
máx. 10W LED (No incl) 100-240V~50/60Hz Aluminio-Aluminium		

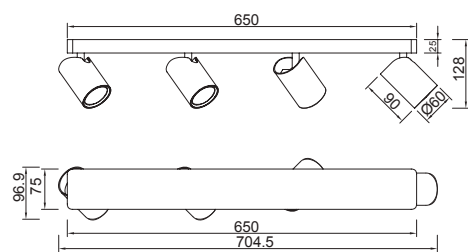


Bombillas recomendadas-Suggested bulbs

K	Wat LED	Reference
3000K	6W	R09196
4000K	6W	R09214
5000K	6W	R09197



7523
pág. 58

8295
pág.284

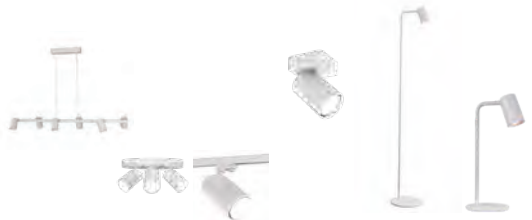

8297
pág. 120

7961
pág. 90

6717
pág. 238

6283
pág.60

7522
pág. 168

6281
pág. 180



GLACIAR
by Santiago Sevillano

Indoor







20.80

24.70

25.10


REFERENCE	K	LED WATT	LUMENS	FINISH	SIZES
7730	3000K	9W	700lm	Blanco-White	100
7731	4000K	9W	700lm	Blanco-White	100
7732	3000K	9W	700lm	Blanco-White	170
7733	4000K	9W	700lm	Blanco-White	170
7734	3000K	9W	700lm	Blanco-White	240
7735	4000K	9W	700lm	Blanco-White	240
220-240V ~ 50/60Hz CRI≥ 80				Acrílico-Arcylic	

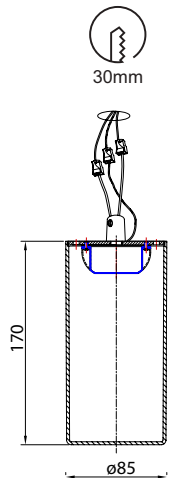

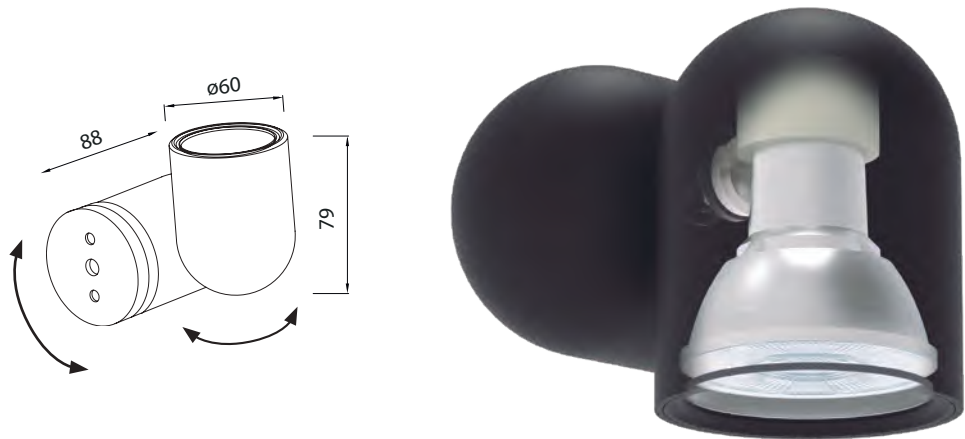

36.30

REFERENCE	BULB (No incl)	FINISH
7294	1L x GU10	Blanco-White
7295	1L x GU10	Negro-Black
máx. 12W LED (No incl) 100-240V~50/60Hz Aluminio-Aluminium		




Bombillas recomendadas-Suggested bulbs


K	Wat LED	On/Off	Dimmable	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm



Registered N° 007663331-0013

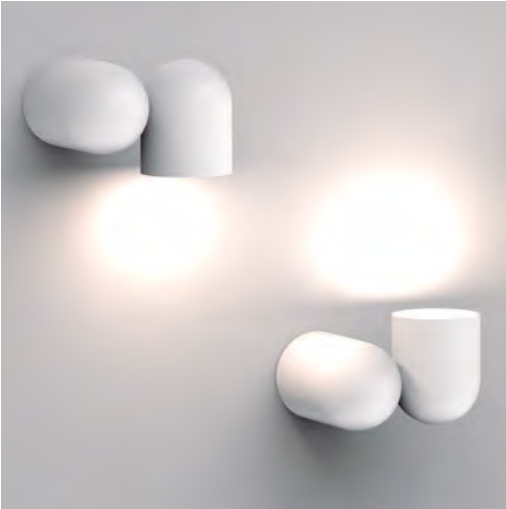



7937
pág. 124

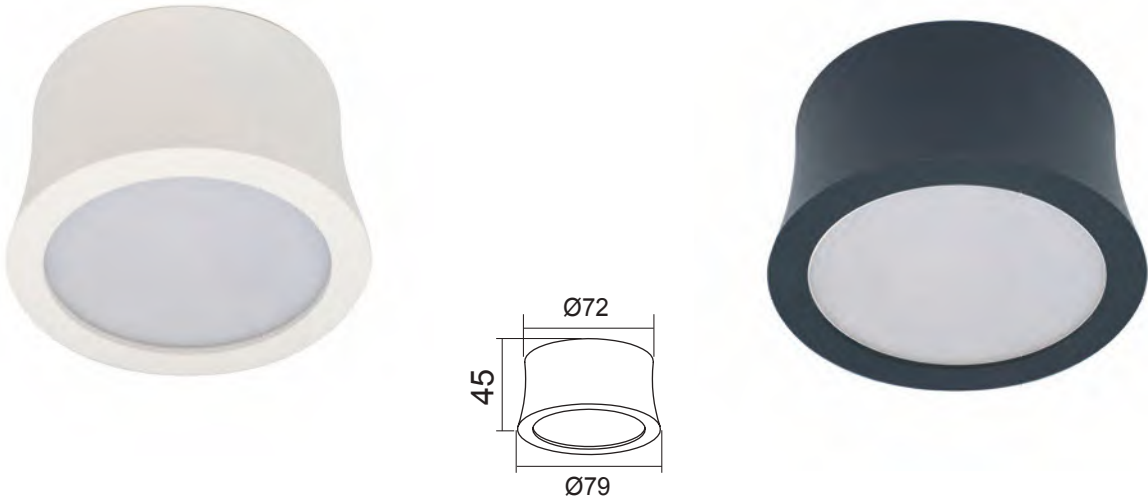


16.40


16.40

REFERENCE	K	LED WATT	LUMENS	FINISH
6830	3000K	7W	520lm	Blanco arena-Sand white
6833	3000K	7W	520lm	Negro arena-Sand black
6832	4000K	7W	560lm	Blanco arena-Sand white
6831	4000K	7W	560lm	Negro arena-Sand black
220-240V~50/60Hz CRI:≥ 80				Aluminio-Aluminium

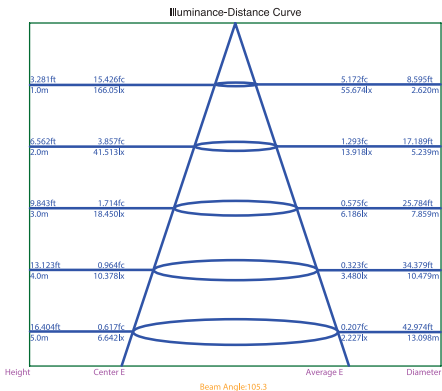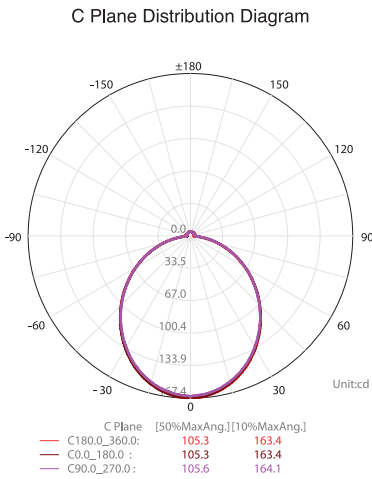





REFERENCE	BULB NO INCLUDED	FINISH
6015	1L x E27	Blanco-White
6016	1L x E27	Plata-Silver
máx. 20W LED (No incl)		100-240V ~50/60Hz Metal-Metal




Spheric Bulb: Ø45*78




MiniStandard Bulb: Ø55*103



Standard Bulb: Ø60*108



R63 Bulb: Ø63*105



R80 Bulb: Ø80*116



6044
pág. 236

5622
pág. 150








23.10

19.20


REFERENCE	BULB NO INCLUDED	FINISH	DIAMETER (ø):
5626	1L x E27	Blanco-White	ø 120
5628	1L x E27	Plata-Silver	ø 120
5627	1L x E27	Blanco-White	ø 90
5629	1L x E27	Plata-Silver	ø 90
máx. 20W LED (No incl)		100-240V~50/60Hz Metal-Metal	




Standard Bulb: Ø60*108




R90 Bulb: Ø90*117




G95 Bulb: Ø95*131




Sferic Bulb: Ø45*78




MiniStandard Bulb: Ø55*103



Standard Bulb: Ø60*108



R63 Bulb: Ø63*105




R80 Bulb: Ø80*116





COLUMBRETES

Indoor



60.70

REFERENCE	K	LED WATT	LUMENS	FINISH
C0085	3000K	12W	1040lm	Blanco mate-Matt white
		220-240V~50/60Hz CRI:≥ 80	Aluminio-Aluminium	





MAGNETO 48V

[CONSULTAR](#)

MAGNETO 48V

New


Indoor



MAGNETO 48V

New

Indoor

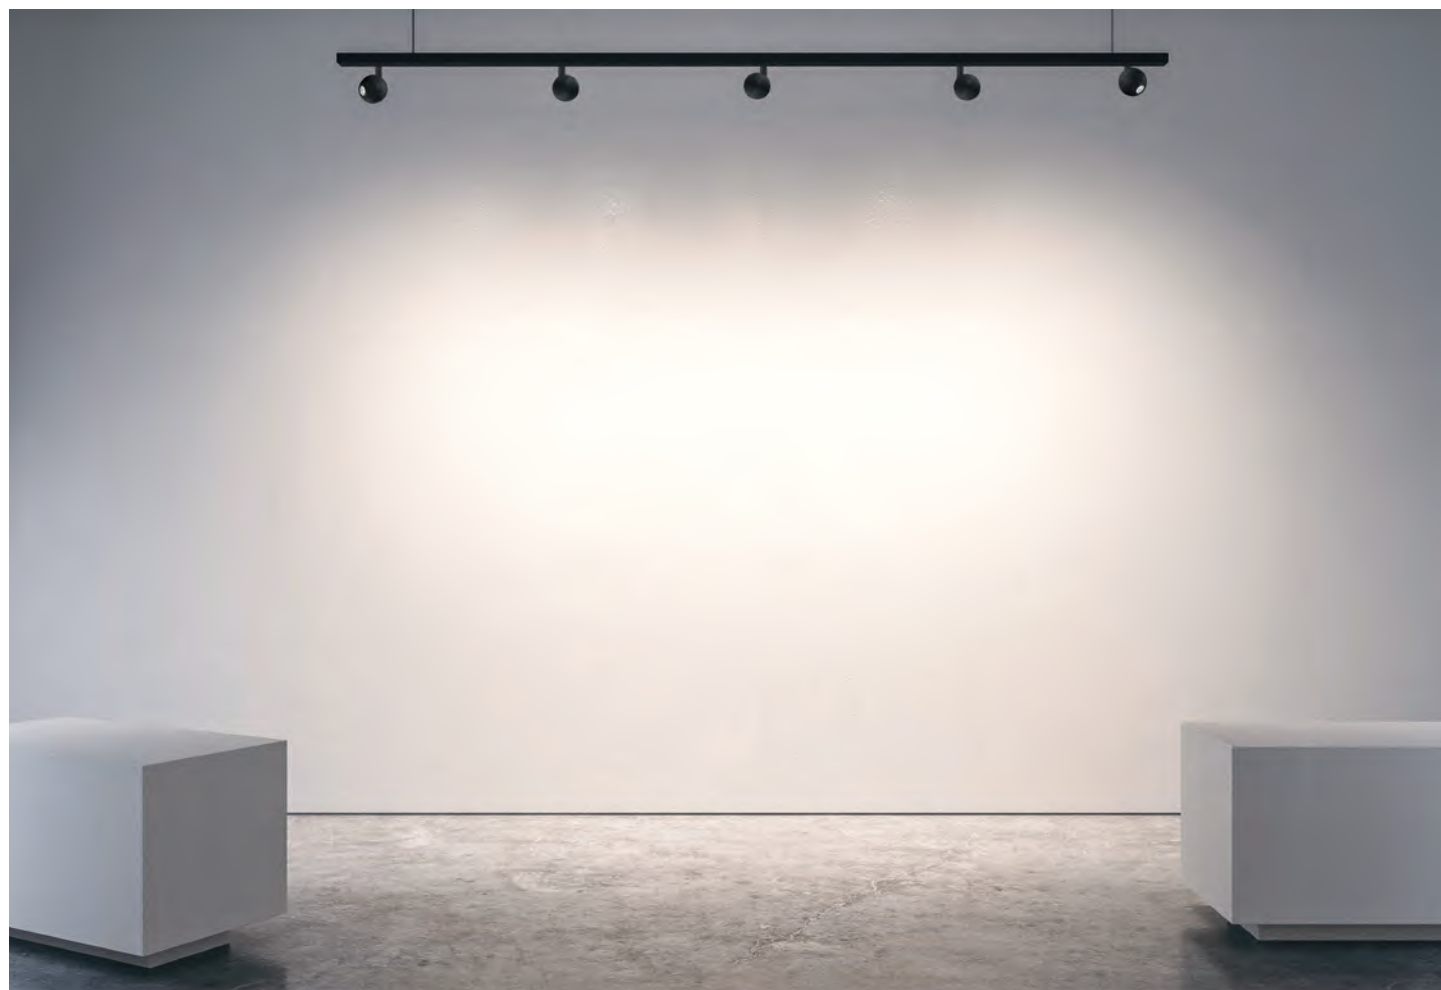





MAGNETO 48V

New

Foco-spot light

Indoor

Foco-spot light



REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8328	3000K	7W	38°	560lm	Negro-Black	On-off
8384	3000K	7W	38°	560lm	Oro-Gold	On-off
8345	3000K	7W	38°	560lm	Negro-Black	Dimmable
8388	3000K	7W	38°	560lm	Oro-Gold	Dimmable
48V CRI≥ 90				Aluminio-Aluminium		

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8315	3000K	5W	50°	400lm	Negro-Black	On-off
8381	3000K	5W	50°	400lm	Oro-Gold	On-off
8316	3000K	7W	38°	560lm	Negro-Black	On-off
8382	3000K	7W	38°	560lm	Oro-Gold	On-off
New 8816	4000K	7W	38°	585lm	Negro-Black	On-off
8317	3000K	20W	38°	1600lm	Negro-Black	On-off
New 8817	4000K	20W	38°	1650lm	Negro-Black	On-off
8332	3000K	5W	50°	400lm	Negro-Black	Dimmable
8385	3000K	5W	50°	400lm	Oro-Gold	Dimmable
8333	3000K	7W	38°	560lm	Negro-Black	Dimmable
8386	3000K	7W	38°	560lm	Oro-Gold	Dimmable
8334	3000K	20W	38°	1600lm	Negro-Black	Dimmable
48V CRI≥ 90				Aluminio-Aluminium		




MAGNETO 48V

New


Foco-spot light

Indoor

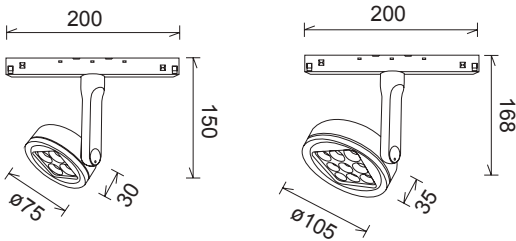

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH		
8325	3000K	10W	50°	800lm	Negro-Black	On-off	
8326	3000K	20W	50°	1600lm	Negro-Black	On-off	
8342	3000K	10W	50°	800lm	Negro-Black	Dimmable	CUT PHASE
8343	3000K	20W	50°	1600lm	Negro-Black	Dimmable	CUT PHASE
48V CRI≥ 90				Aluminio-Aluminium			

Foco lineal- Linear spot light


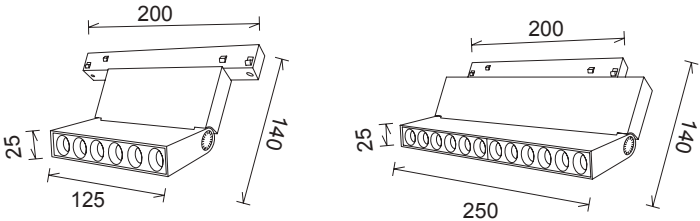


REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH		
8323	3000K	10W	50°	800lm	Negro-Black	On-off	
8324	3000K	20W	50°	1600lm	Negro-Black	On-off	
8340	3000K	10W	50°	800lm	Negro-Black	Dimmable	CUT PHASE
8341	3000K	20W	50°	1600lm	Negro-Black	Dimmable	CUT PHASE
48V CRI≥ 90				Aluminio-Aluminium			



MAGNETO 48V




New

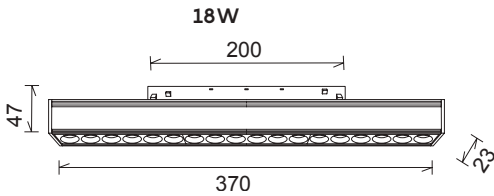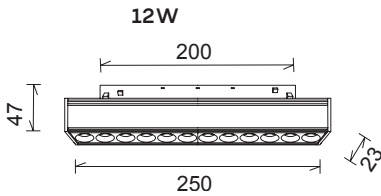

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8320	3000K	12W	50°	960lm	Negro-Black	On-off
New 8820	4000K	12W	50°	1000lm	Negro-Black	On-off
8321	3000K	18W	50°	1440lm	Negro-Black	On-off
New 8821	4000K	18W	50°	1500lm	Negro-Black	On-off
8337	3000K	12W	50°	960lm	Negro-Black	Dimmable
8338	3000K	18W	50°	1440lm	Negro-Black	Dimmable
48V CRI≥ 90				Aluminio-Aluminium		



Angulo difusor-Corner diffuser

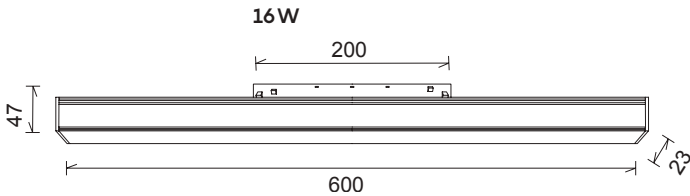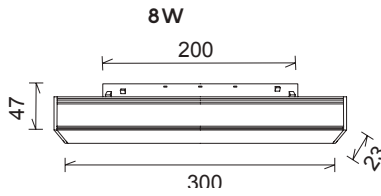

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8322	3000K	16 W	120°	1280lm	Negro-Black	On-off
8339	3000K	16 W	120°	1280lm	Negro-Black	Dimmable
8318	3000K	8 W	120°	640lm	Negro-Black	On-off
New 8818	4000K	8 W	120°	665lm	Negro-Black	On-off
8319	3000K	16 W	120°	1280lm	Negro-Black	On-off
New 8819	4000K	16 W	120°	1340lm	Negro-Black	On-off
8335	3000K	8 W	120°	640lm	Negro-Black	Dimmable
8336	3000K	16 W	120°	1280lm	Negro-Black	Dimmable
48V CRI≥ 90				Aluminio-Aluminium		




MAGNETO 48V

New

Colgante-Pendant

Indoor

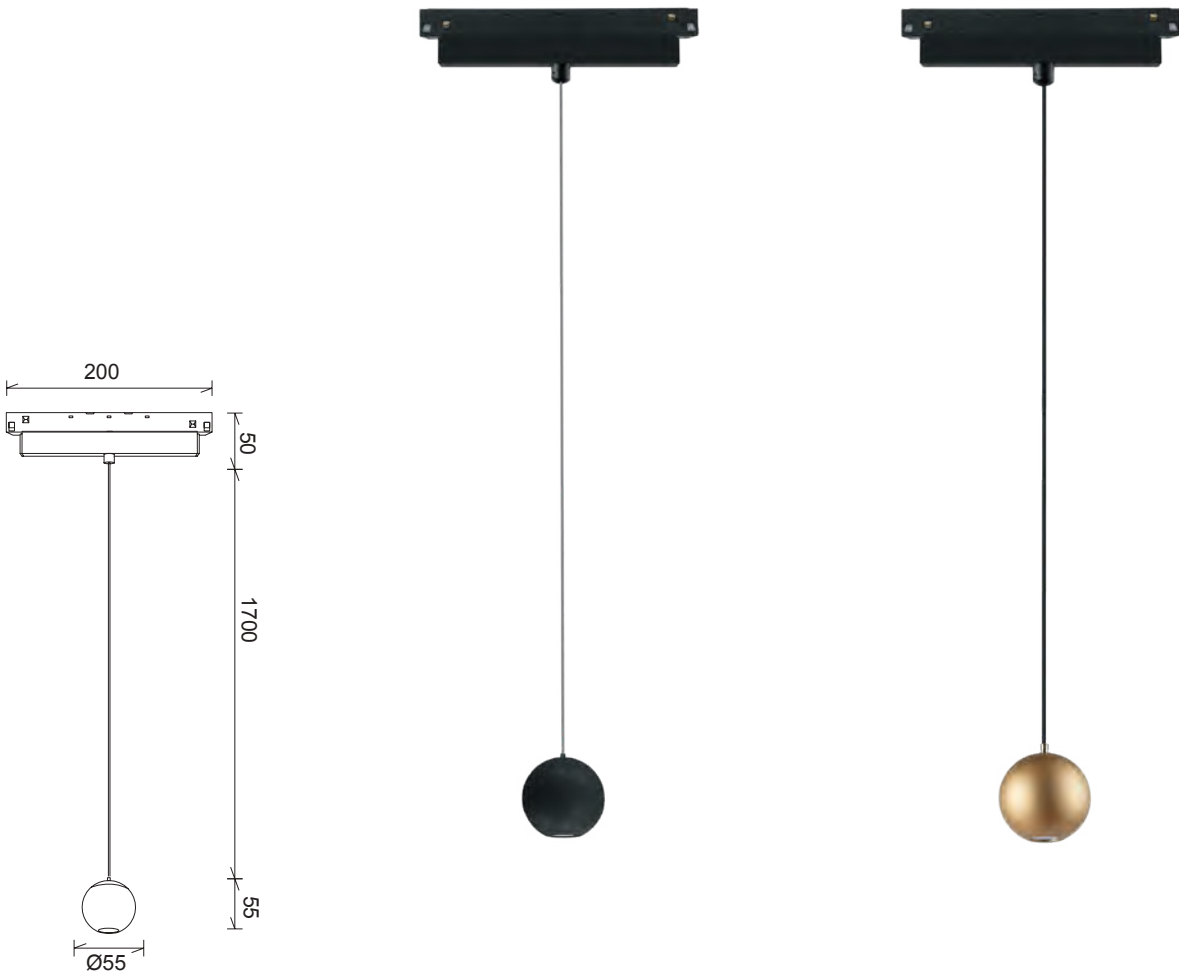

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8327	3000K	7W	38°	560lm	Negro-Black	On-off
8383	3000K	7W	38°	560lm	Oro-Gold	On-off
8344	3000K	7W	38°	560lm	Negro-Black	Dimmable
8387	3000K	7W	38°	560lm	Oro-Gold	Dimmable
48V CRI≥ 90				Aluminio-Aluminium		



REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8441	3000K	10W	110°	800lm	Negro-Black	On-off
New 8824	4000K	10W	110°	840lm	Negro-Black	On-off
8442	3000K	10W	110°	800lm	Oro-Gold	On-off
8443	3000K	10W	110°	800lm	Negro-Black	Dimmable
8444	3000K	10W	110°	800lm	Oro-Gold	Dimmable
48V CRI≥ 90				Aluminio-Aluminium		





MAGNETO 48V

New



Colgante Pagoda- Pendant Pagoda

Indoor


Colgante-Pendant

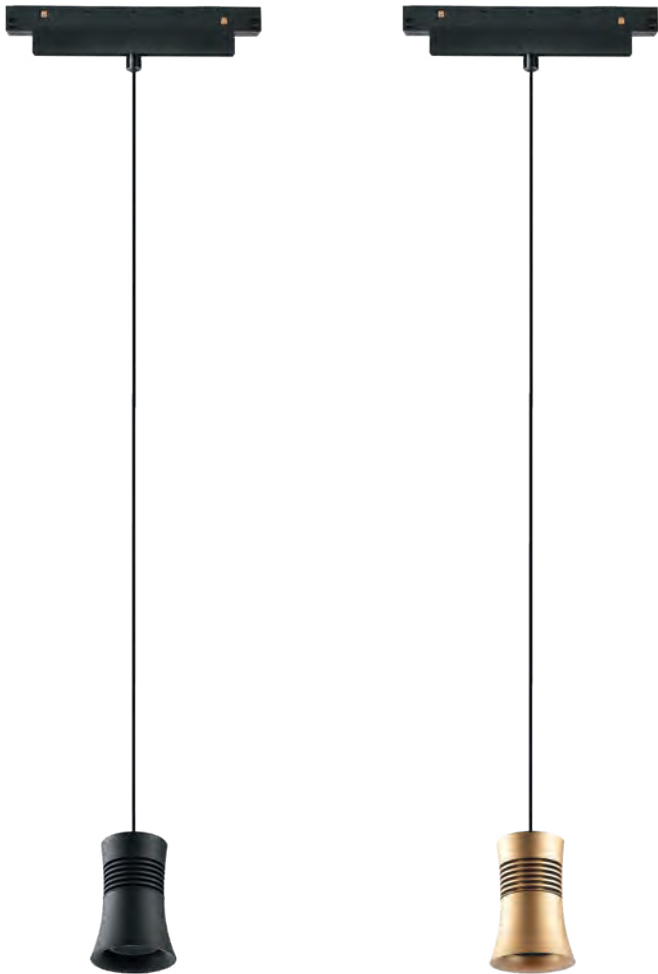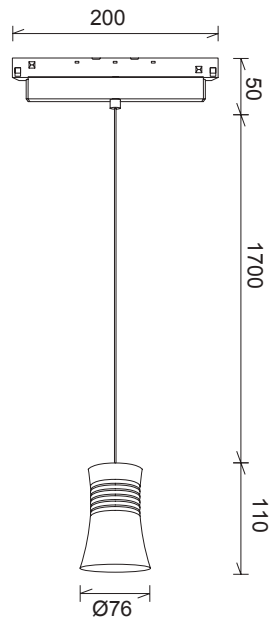

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH		
8389	3000K	12W	38°	950lm	Negro-Black	On-off	
New 8823	4000K	12W	38°	1000lm	Negro-Black	On-off	
8390	3000K	12W	38°	950lm	Oro-Gold	On-off	
8391	3000K	12W	38°	950lm	Negro-Black	Dimmable	
8392	3000K	12W	38°	950lm	Oro-Gold	Dimmable	
48V CRI≥ 90				Aluminio-Aluminium			

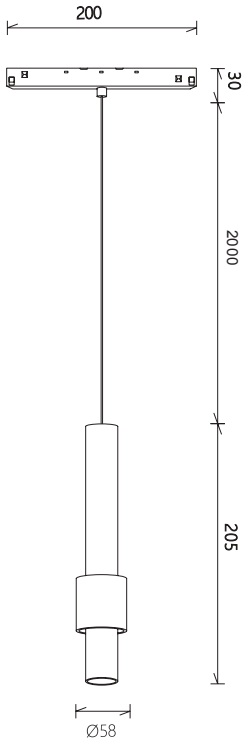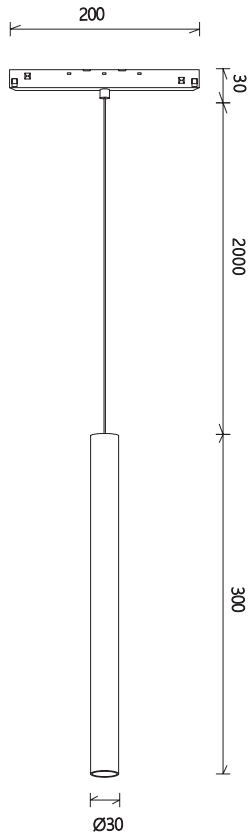

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH		
8329	3000K	5W	38°	400lm	Negro-Black	On-off	
New 8822	4000K	5W	38°	420lm	Negro-Black	On-off	
8346	3000K	5W	38°	400lm	Negro-Black	Dimmable	
8445	3000K	7W	38°	560lm	Oro/Negro-Gold/black	On-off	
New 8825	4000K	7W	38°	585lm	Oro/Negro-Gold/black	On-off	
8446	3000K	7W	38°	560lm	Oro/Negro-Gold/black	Dimmable	
48V CRI≥ 90				Aluminio-Aluminium			




Carril de empotrar-*Recessed track*

Indoor




Los carriles empotrados permiten una fusión total, creando infinitas soluciones para la iluminación de espacios interiores, con el refinamiento y la discreción de un sistema que ofrece un diseño moderno, minimalista y sereno.

The recessed rails allow a total fusion, creating unlimited solutions for the lighting of interior spaces, with the refinement and discretion of a system that offers a modern, minimalist and serene design.

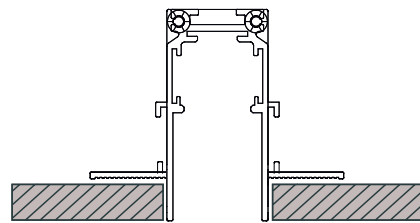


Carril de superficie-*Surface mounted track*

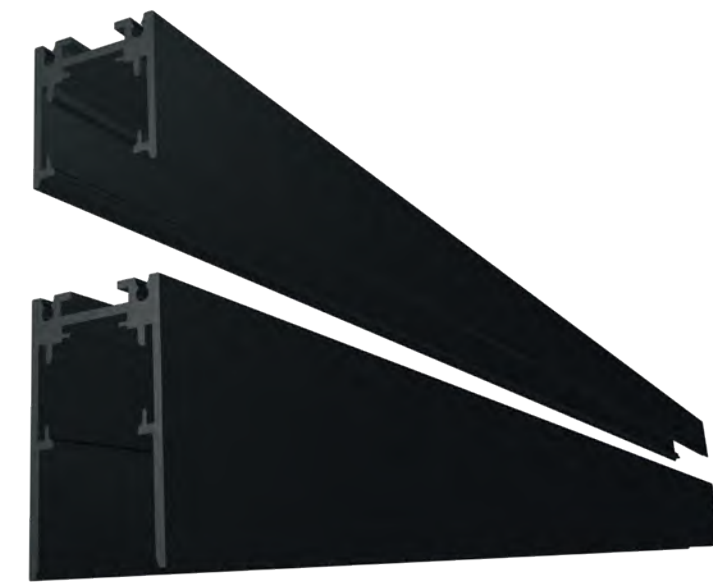

Los carriles de superficie son soluciones diseñadas para cualquier zona de instalación. Su particular diseño lo convierte en protagonista absoluto del espacio.

Surface rails are solutions designed for any installation area. Its particular design makes it the absolute protagonist of the space.

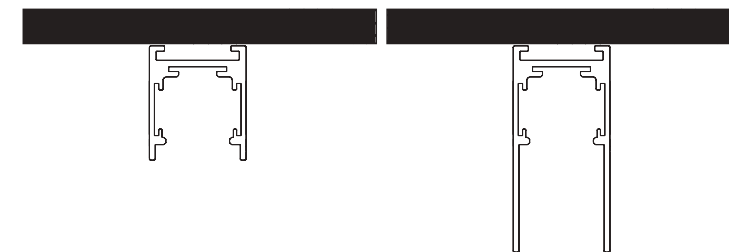


MAGNETO 48V

Indoor


SURFACE TRACK

- 8300 Track length 1000 mm
- 8301 Track length 2000 mm

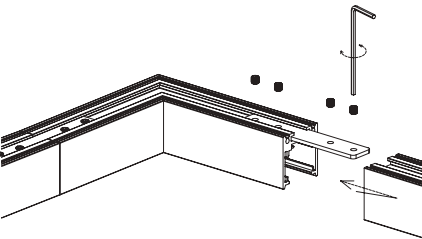


TRACK ACCESSORIES


- 8304 L-joint 90° plates incl.



- 8305 Wall to wall connector (in) plates incl.



- 8306 Wall to wall connector (out) plates incl.



- 8303 Top track connection plate



- 8314 Live end (connector)



- 8313 Live end (feeder)




- 8302 Set 2 end caps



- 8377 Suspension kits (2 wires)



- Brown +48V
- Blue -48V

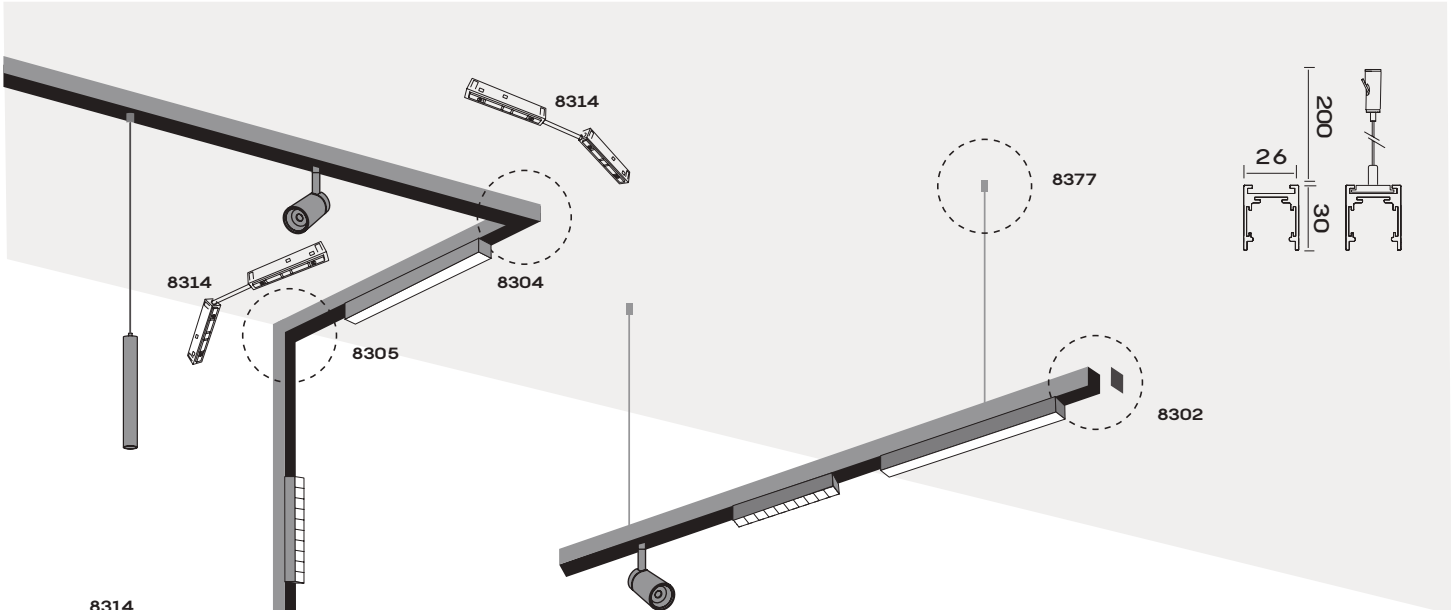

8314

8314

8304

8305

8377

8302

8303

8314




MAGNETO 48V

Indoor

SURFACE TRACK


8371 Track length 1000 mm

8372 Track length 2000 mm

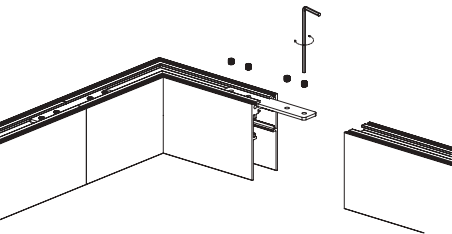


TRACK ACCESSORIES


8374 L-joint 90° plates incl.



8375 Wall to wall connector (in) plates incl.



8376 Wall to wall connector (out) plates incl.



8303 Top track connection plate



8314 Live end (connector)




8313 Live end (feeder)



8373 Set 2 end caps



8377 Suspension kits (2 wires)

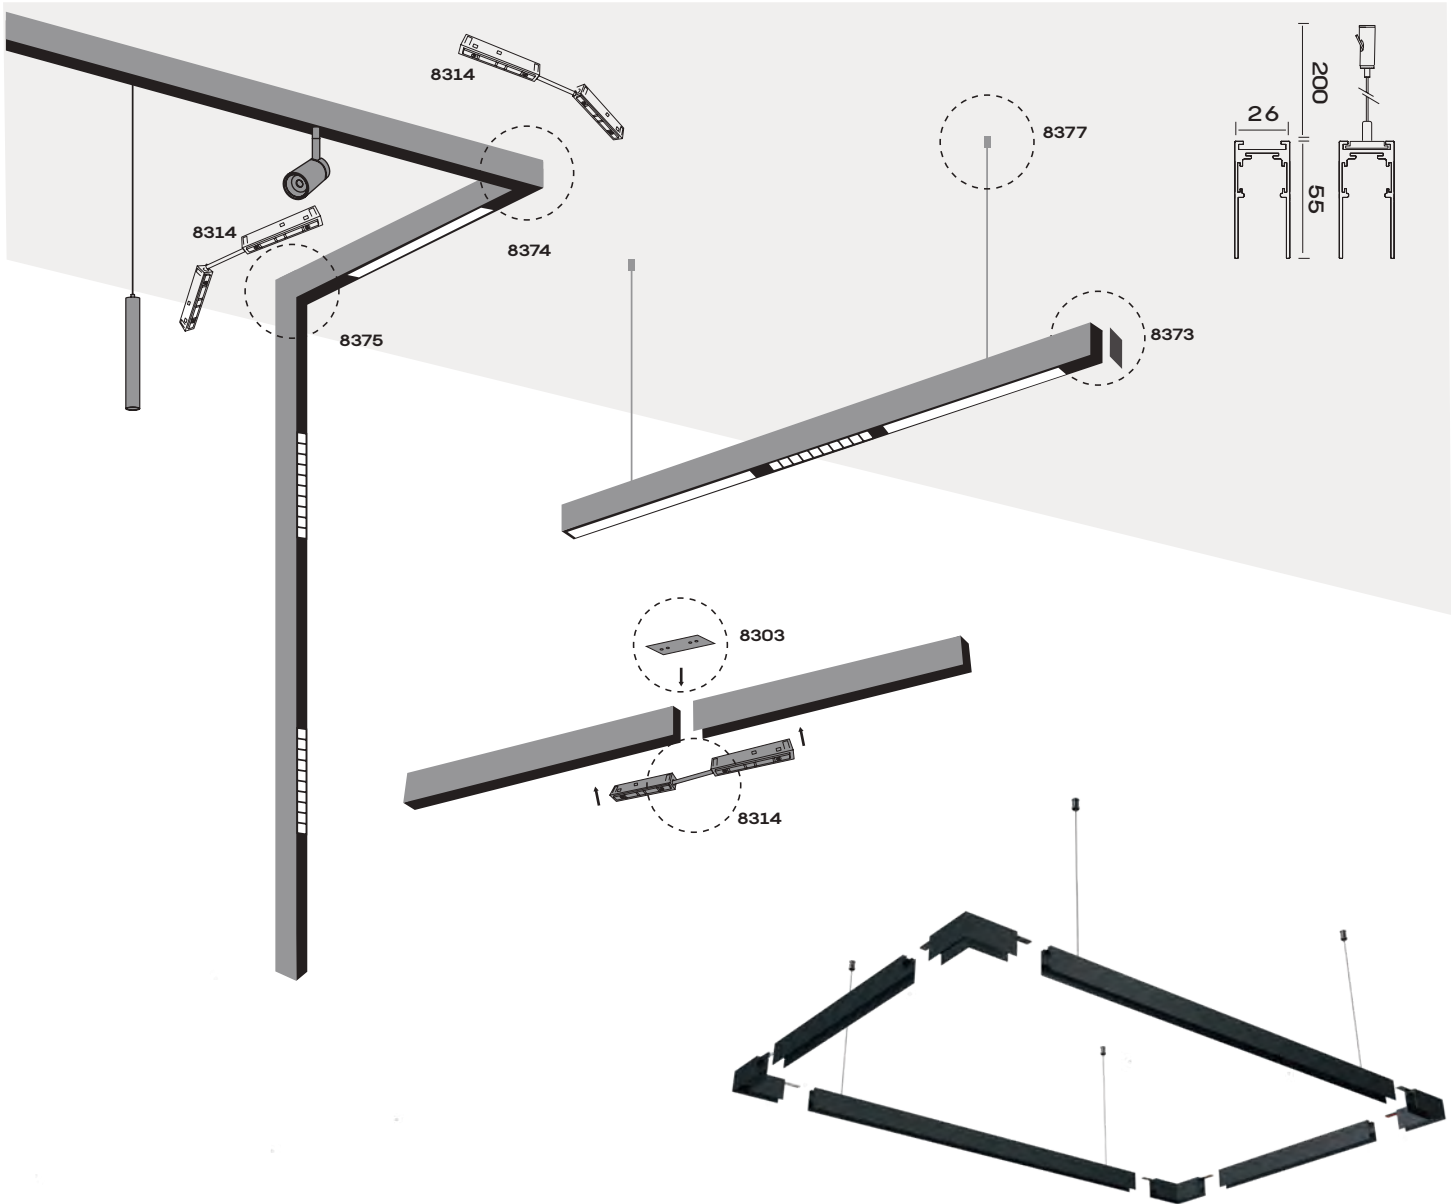

* Tapa incluida-Cover included


MAGNETO 48V

Indoor

RECESSED TRACK


8307 Track length 1000 mm

8308 Track length 2000 mm

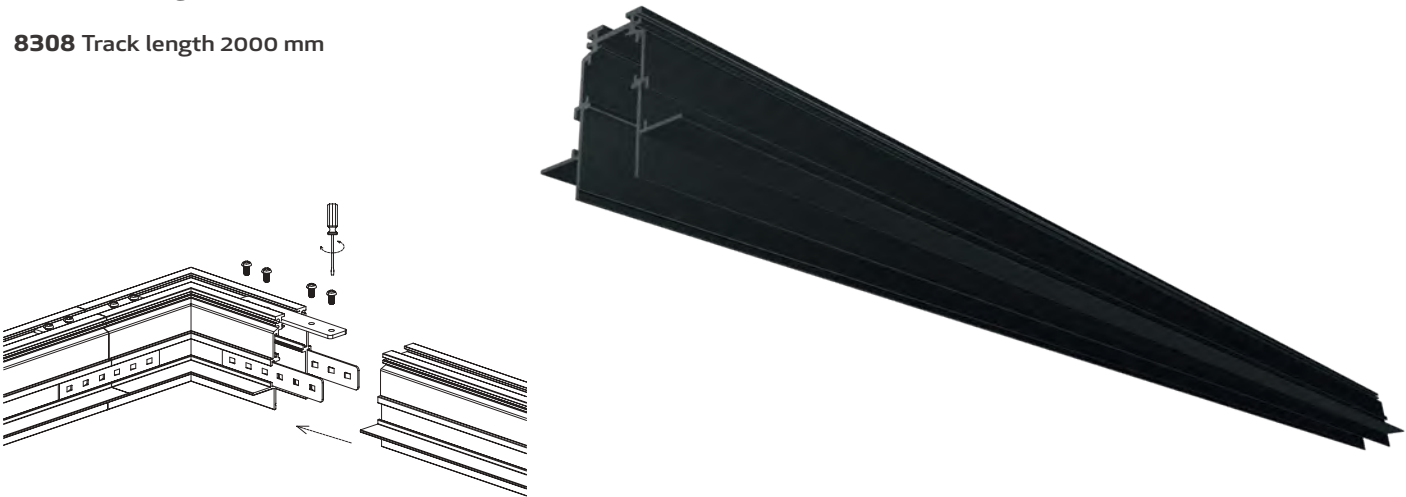


TRACK ACCESSORIES


8309 L-joint 90° plates incl.



8310 Wall to wall connector (in) plates incl.



8311 Wall to wall connector (out) plates incl.



8312 Side track connection plate ×2



8303 Top track connection plate



8314 Live end (connector)




8313 Live end (feeder)



Brown +48V

Blue -48V

8373 Set 2 end caps

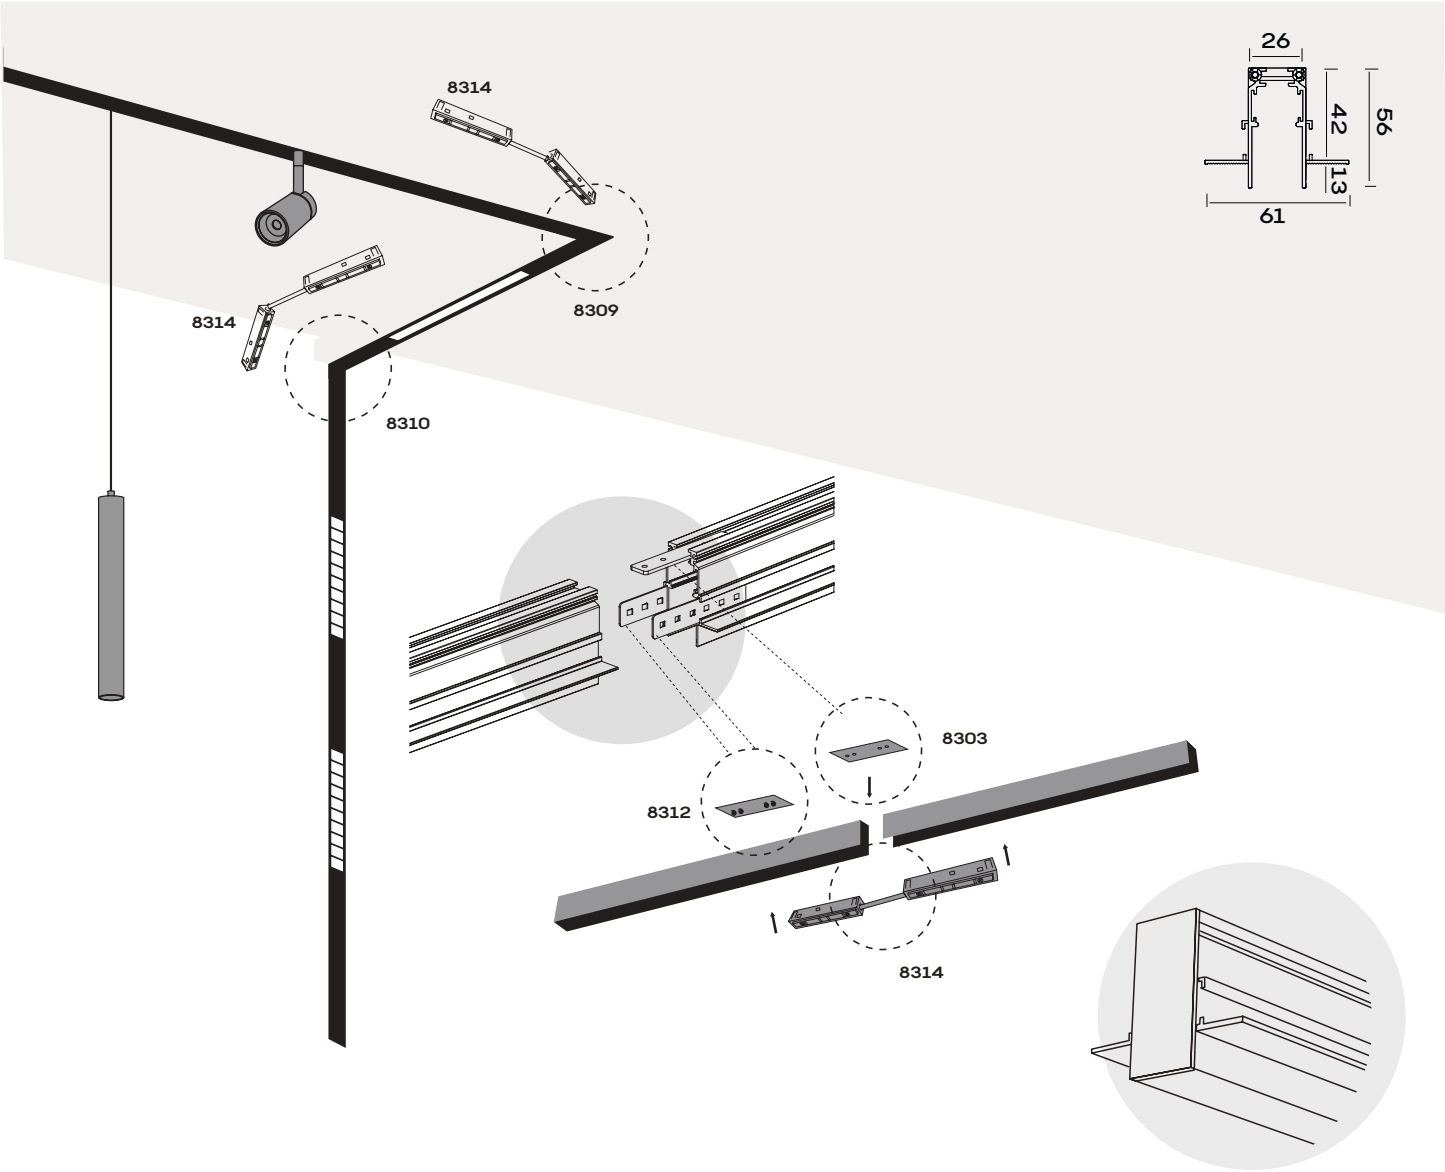


* Tapa incluída-Cover included

ALIMENTADORES-DRIVERS

Tension constante48v
48v Constant voltage

Indoor

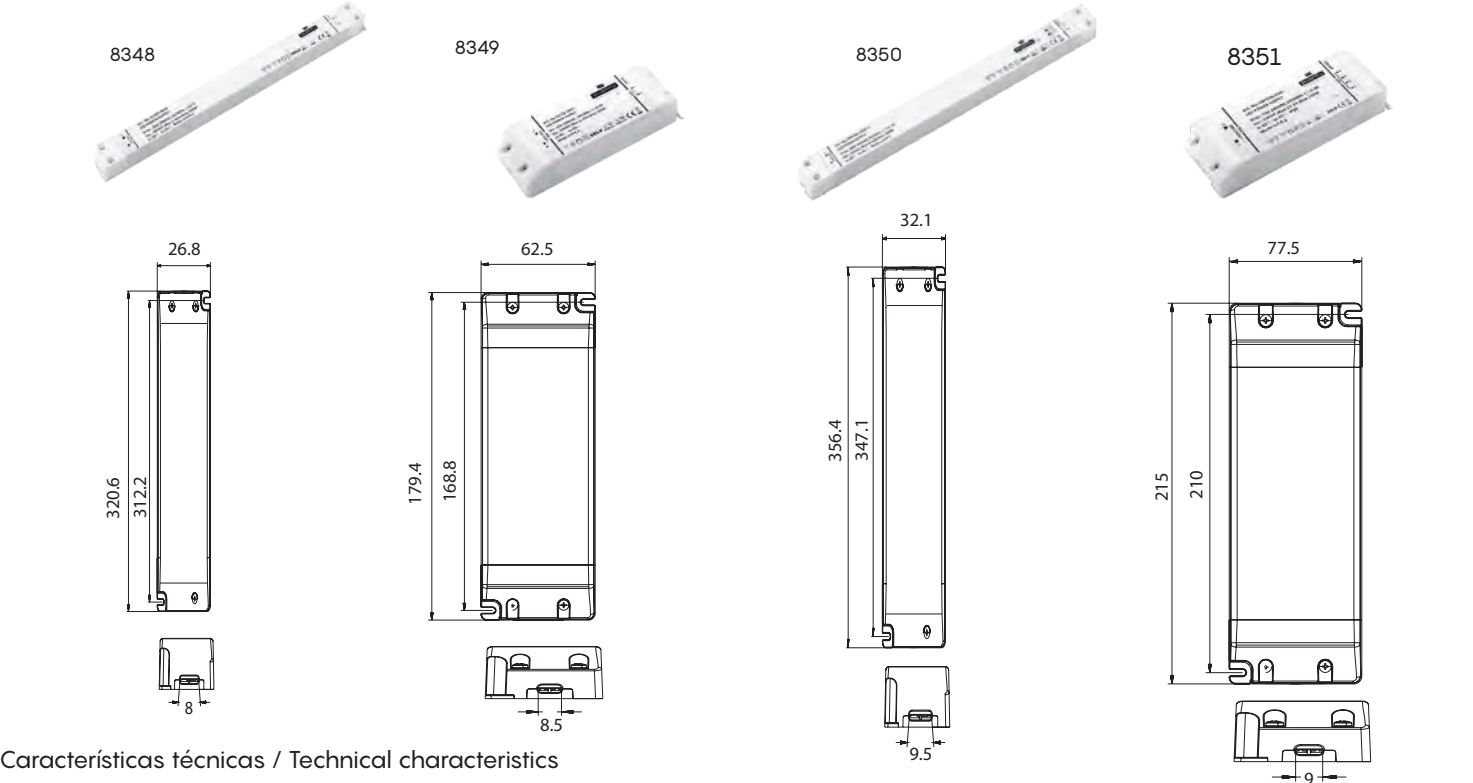

Características técnicas / Technical characteristics

Ref.	Art.-No	Tensión nominal de entrada Nominal input voltage	Rango de potencia en módulo Output power range	Tensión de salida DC Output voltage DC	Corriente de salida máxima Maximum output current	Factor de potencia Power factor	Frecuencia Frequency	Temp. máx. envolvente Max temp.at tc point	Temp. funcionamiento Operating temp.	Protección Protection
		Vac	W	Vdc	A	λ	Hz	tc (°C)	ta (°C)	IP
8348	SL100-48VF-1	200-240V	0-100	48	2.05	≥ 0,95	50/60	90°	-20...+45°	20
8349	SS150-48VL	200-240V	0-150	48	3.12	≥ 0,95	50/60	90°	-20...+45°	20
8350	SL240-48VF	220-240V	0-240	48	5.00	≥ 0,95	50/60	90°	-20...+45°	20
8351	SNP320-48VL-1	220-240V	0-320	48	6.67	≥ 0,95	50/60	90°	-20...+45°	20

REGULABLE/DIMMABLE




NO REGULABLE/NO DIMMABLE



ALIMENTADORES-DRIVERS

Tension constante 48v
48v Constant voltage

NO DIMMABLES

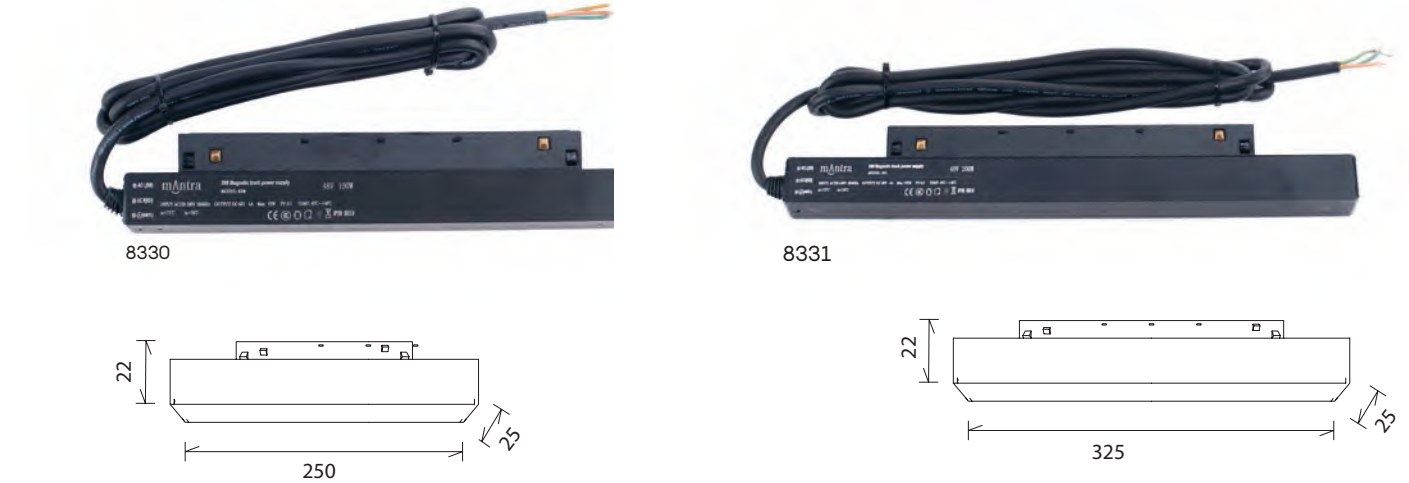

Características técnicas / Technical characteristics

NO DIMMABLES

Ref.	Art.-No	Tensión nominal de entrada Nominal input voltage	Rango de potencia en módulo Output power range	Tensión de salida DC Output voltage DC	Corriente de salida máxima Maximum output current	Factor de potencia Power factor	Frecuencia Frequency	Temp. máx. envolvente Max temp.at tc point	Temp. funciona- miento Operating temp.	Protección Protection
		Vac	W	Vdc	A	λ	Hz	tc (°C)	ta (°C)	IP
8330		220-240V	0-100	48	1.25	≥ 0,95	50/60	85°	-20...+45°	20
8331		200-240V	0-200	48	2.5	≥ 0,7	50/60	80°	-20...+50°	20



SISTEMA REGULACIÓN TENSIÓN CONSTANTE TRIAC 48v
48v CONSTANT VOLTAGE DIMMING TRIAC SYSTEM

V1-S



175mm

45mm

160mm

27mm

Permite la regulación de tiras led monocolor (12/24/36V) y carriles magnéticos de 48V.

Puede regular con mecanismos TRIAC y mecanismos pulsadores standard (PUSH).

Puedes conectar varios al mismo mecanismo PUSH ; puedes conectar un PUSH y un TRIAC al mismo tiempo.

máx.entrada: 15A / máx.salida: 1 canal de 15A.

Protección contra sobrecargas eléctricas, cortocircuitos y sobrecalentamiento.

Señal entrada regulador AC 40-220v.

Allows to control single color LED strips (12/24/36 V) and 48V magnetic tracks.

Suitable for TRIAC controllers and standard PUSH switches.

You may connect several to the same PUSH switch; also you may connect PUSH switch and TRIAC dimmer at the same time.


max.Input: 15 A / max.Output : 1 channel -15 A .

Protection against over current, short circuit & over temperature


Input dimmig signal AC 40-220v.

Esquema de conexión / Connection diagram						
Ref.	Input-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output power	Tipo tira Led/magnetic Led strip type/mag- netic	Control a través de Control made by
	V	mA	A	12V 24V 36V 48V	Monocolor	Pulsador standard y/o triac
8347	12-48VDC	PWM PUSH TRIAC	1CH,15A	180W 360W 540W 720W	MONOC. DIM (1CH)	Standard push switch and/or triac


Estructuras e Instalaciones Mecánicas / Mechanical Structures and Installations

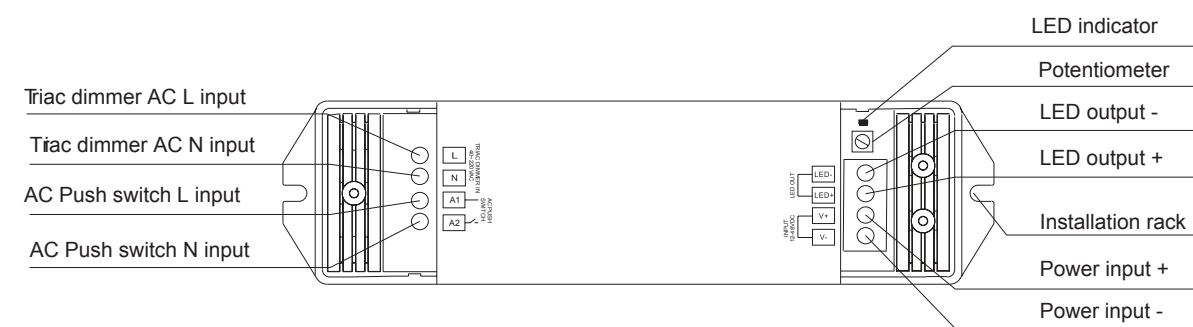


Conecte el atenuador Triac con un solo cable, sin cable neutro.
Connect single wire Triac dimmer, without neutral wire.

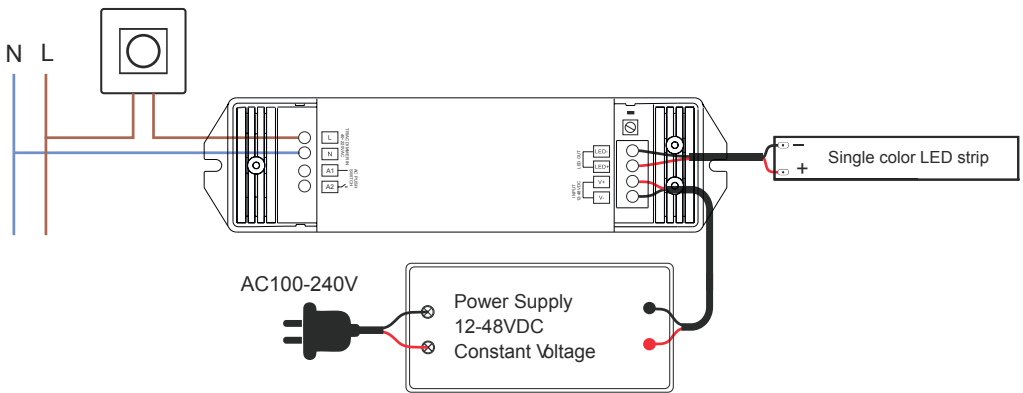

Conecte el atenuador Triac con entrada de cable neutral
Connect Triac dimmer with neutral wire input


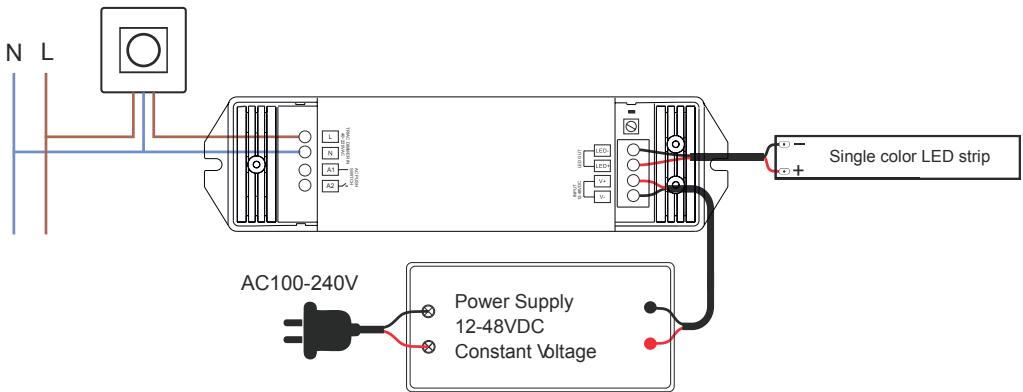


Conectar con el interruptor Push de CA
Connect with AC push switch

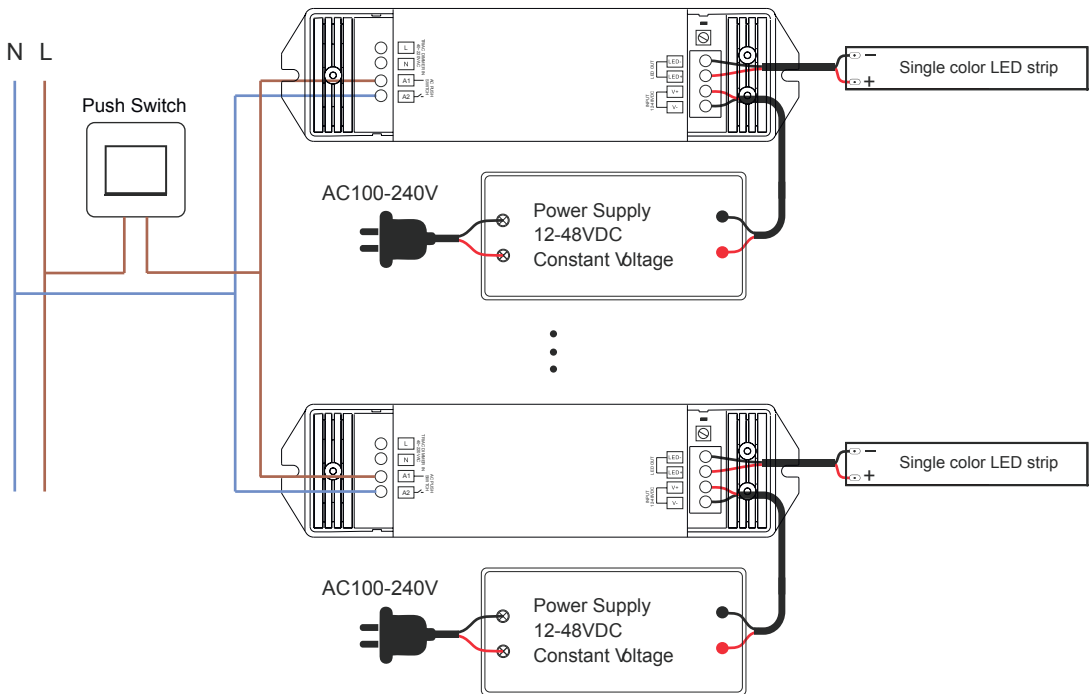

Focos carril trifásico

Three-phase rail spotlights

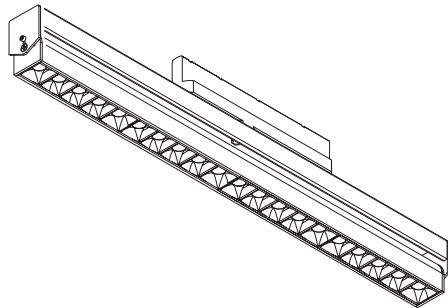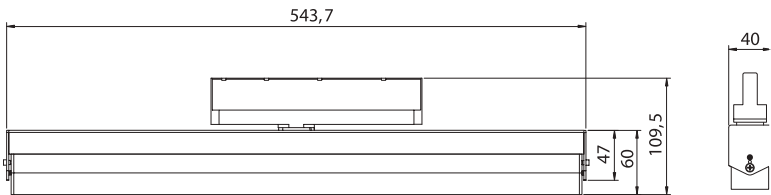


UGR<19

CRI≥90


REFERENCE	K	LED WATT	LUMENS	FINISH
8359	3000K	30W	2350lm	Blanco-White
8360	3000K	30W	2350lm	Negro-Black
8361	4000K	30W	2400lm	Blanco-White
8362	4000K	30W	2400lm	Negro-Black
220-240V~ 50/60Hz CRI≥ 90				Aluminio-Aluminium



UGR<19

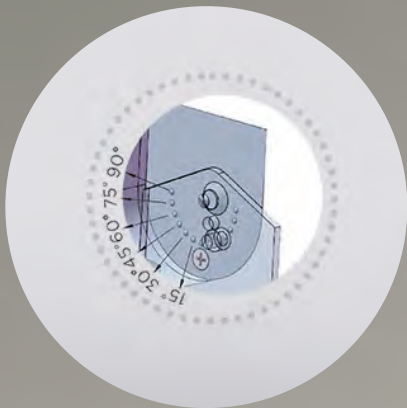



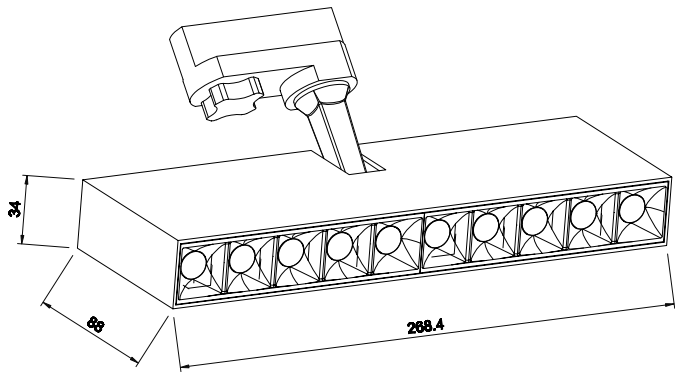

UGR<19

CRI≥90

REFERENCE	K	LED WATT	LUMENS	FINISH
8363	3000K	30W	2350lm	Blanco-White
8364	3000K	30W	2350lm	Negro-Black
8365	4000K	30W	2400lm	Blanco-White
8366	4000K	30W	2400lm	Negro-Black
220-240V~ 50/60Hz CRI≥ 90				Aluminio-Aluminium




UGR<19








REFERENCE	K	LED WATT	LUMENS	FINISH
7315	3000K	35W	3500lm	Blanco-White
7317	3000K	35W	3500lm	Negro-Black
7316	4000K	35W	3850lm	Blanco-White
7318	4000K	35W	3850lm	Negro-Black
220-240V~ 50/60Hz CRI≥90				Aluminio-Aluminium

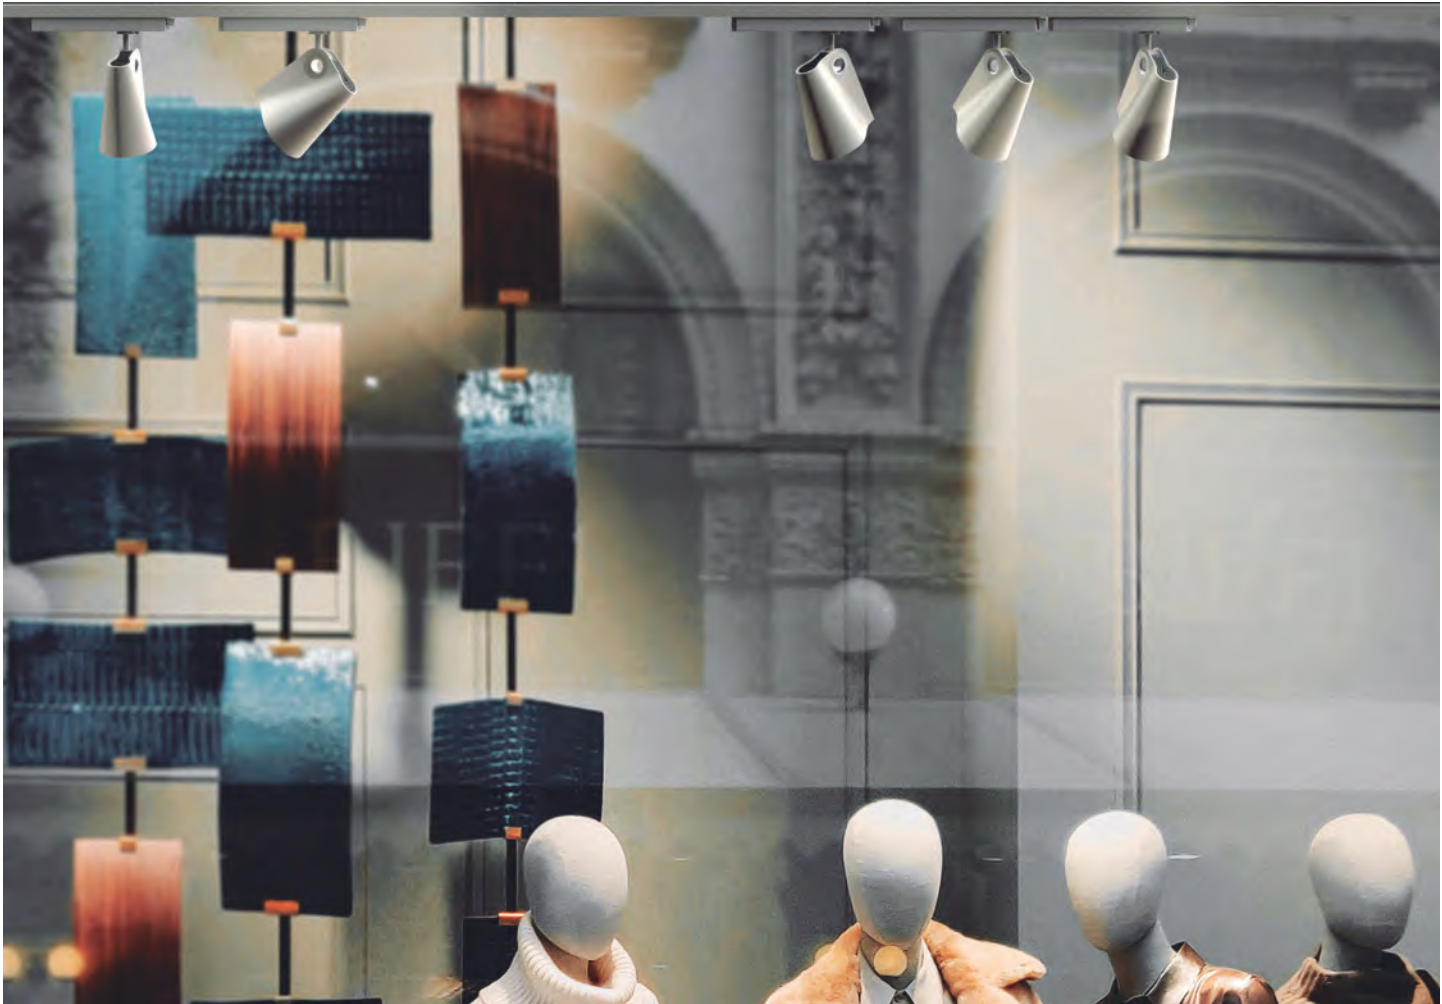

LENTES-LENS	
ref 7319 _13°	NOT INCLUDED
ref 7320 _24°	NOT INCLUDED
ref 7321 _38°	Included*

PANAL DE ABEJA-HONEYCOMB	
ref 7322	NOT INCLUDED

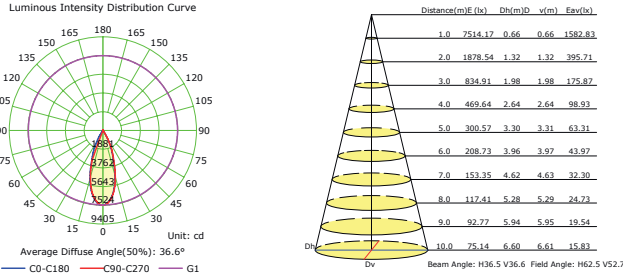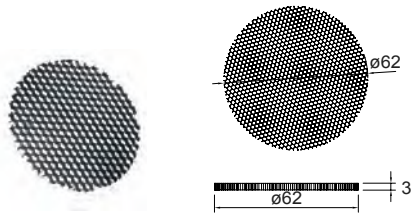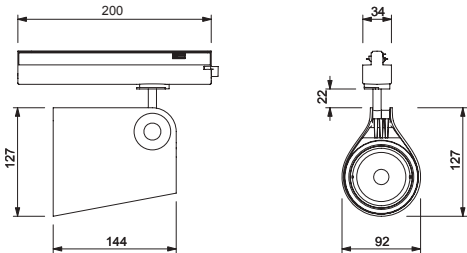


TIR
LENS





REFERENCE	BULB (No incl)	FINISH
7788	1L x GU10	Blanco mate-Matt white
7789	1L x GU10	Negro mate-Matt black
máx. 12W LED (No incl)		100-240V ~ 50/60Hz Metal-Metal



7787
pág. 134



PAGODA
by David Villalba


Colgante carril trifásico-Triphasic rail spot

Indoor

UGR<16 CRI≥90




REFERENCE	K	LED WATT	LUMENS	FINISH
7780	3000K	12,5W	950lm	Blanco-White
7782	3000K	12,5W	950lm	Negro-Black
7781	4000K	12,5W	1050lm	Blanco-White
7783	4000K	12,5W	1050lm	Negro-Black
220-240V~ 50/60Hz CRI≥90				Aluminio-Aluminium



TIR
LENS

UGR<16



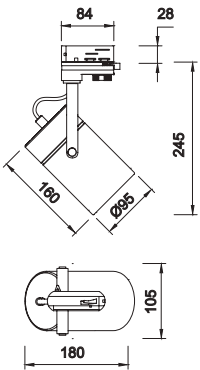

28.20


REFERENCE	BULB (No incl)	FINISH
6044	1L x E27	Blanco-White
6045	1L x E27	Negro-Black
máx. 20W LED (No incl)		100-240V~50/60Hz Metal-Metal




5626
pág. 190

6015
pág. 188


5622
pág. 150




Spheric Bulb: Ø45*78




MiniStandard Bulb: Ø55*103



Standard Bulb: Ø60*108




R63 Bulb: Ø63*105



R80 Bulb: Ø80*116





26.70

REFERENCE	BULB NOT INCLUDED	FINISH
6717	1L x GU10	Blanco-White
6718	1L x GU10	Negro-Black
máx. 10W LED (No incl) 100-240V~ 50/60Hz Aluminio-Aluminium		



Bombillas recomendadas-Suggested bulbs

K	Wat LED	Reference
3000K	6W	R09196
4000K	6W	R09214
5000K	6W	R09197



7523
pág. 58

8295
pág.284



8297
pág. 120

7961
pág. 90


6281
pág. 180

6283
pág.60

7522
pág. 168

6281
pág. 156



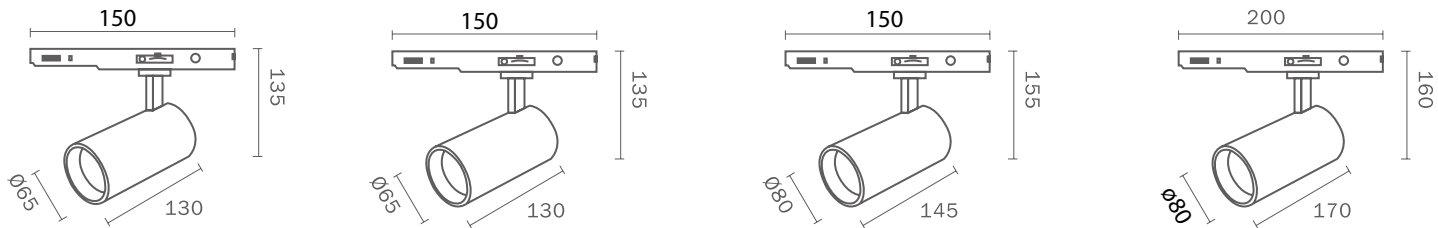


REFERENCE	K	LED WATT	LUMENS	FINISH	OPTICAL Included*	ANGLE
7200	3000K	15W	1500lm	Blanco-White	7218	38°
7204	4000K	15W	1650lm	Blanco-White	7218	38°
7201	3000K	20W	2000lm	Blanco-White	7218	38°
7205	4000K	20W	2200lm	Blanco-White	7218	38°
7202	3000K	30W	3000lm	Blanco-White	7221	38°
7206	4000K	30W	3300lm	Blanco-White	7221	38°
7203	3000K	40W	4000lm	Blanco-White	7224	38°
7207	4000K	40W	4400lm	Blanco-White	7224	38°
220-240V ~ 50/60HzCRI:≥ 90				Aluminio-Aluminium		

* Reflector-Optic

REFERENCE 15/20W	REFERENCE 30/40W	REFERENCE 40W	BEAM ANGLE	INCLUDED
7216	7219	7222	15°	not included
7217	7220	7223	24°	not included
*7218	*7221	*7224	38°	Included*



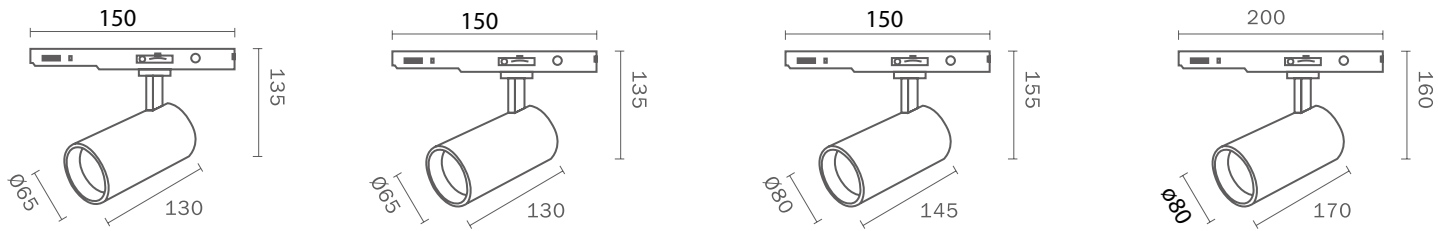


REFERENCE	K	LED WATT	LUMENS	FINISH	OPTICAL Included*	ANGLE
7208	3000K	15W	1500lm	Negro-Black	7218	38°
7212	4000K	15W	1650lm	Negro-Black	7218	38°
7209	3000K	20W	2000lm	Negro-Black	7218	38°
7213	4000K	20W	2200lm	Negro-Black	7218	38°
7210	3000K	30W	3000lm	Negro-Black	7221	38°
7214	4000K	30W	3300lm	Negro-Black	7221	38°
7211	3000K	40W	4000lm	Negro-Black	7224	38°
7215	4000K	40W	4400lm	Negro-Black	7224	38°
220-240V ~ 50/60HzCRI:≥ 90				Aluminio-Aluminium		

* Reflector-Optic


REFERENCE 15/20W	REFERENCE 30/40W	REFERENCE 40W	BEAM ANGLE	INCLUDED
7216	7219	7222	15°	not included
7217	7220	7223	24°	not included
*7218	*7221	*7224	38°	Included*




LED 15W 3000K 38°

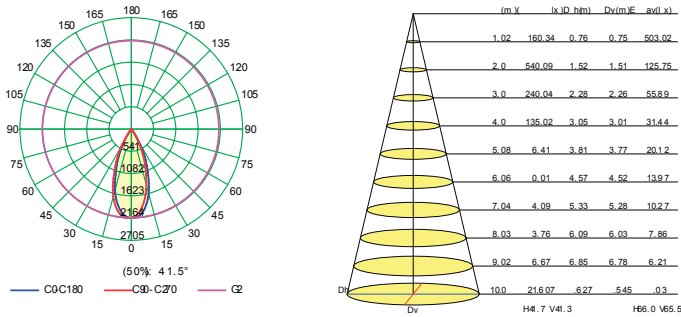


LED 15W 4000K 38°

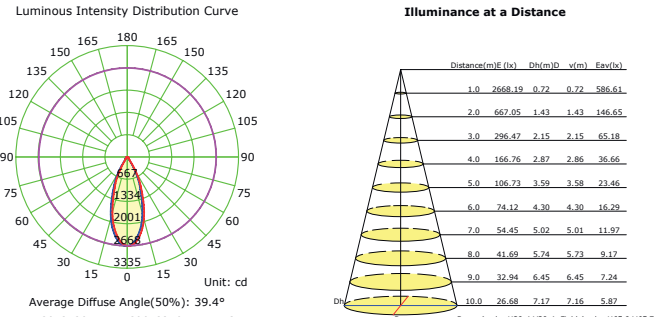


LED 20W 3000K 38°

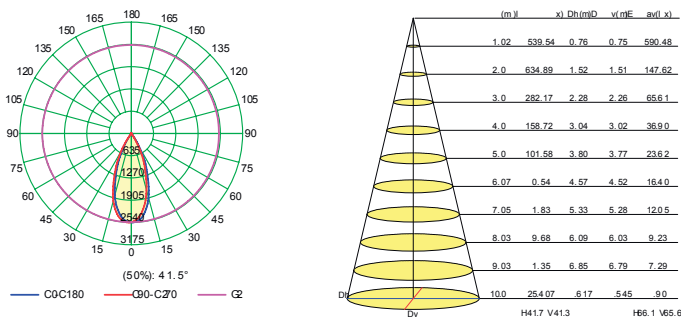


LED 20W 4000K 38°

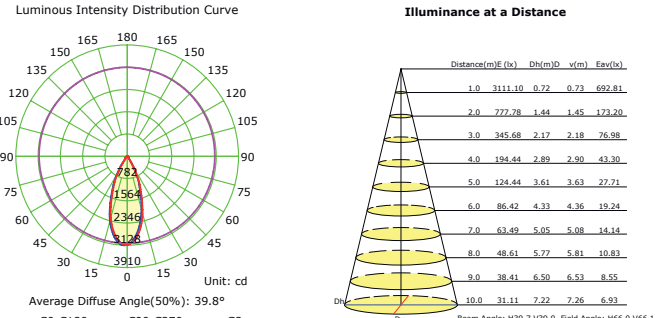


LED 30W 3000K 38°

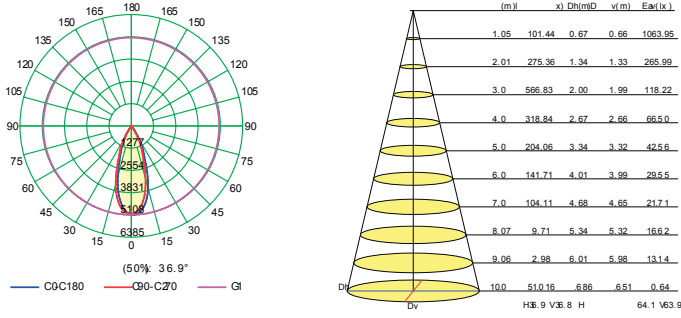


LED 30W 4000K 38°

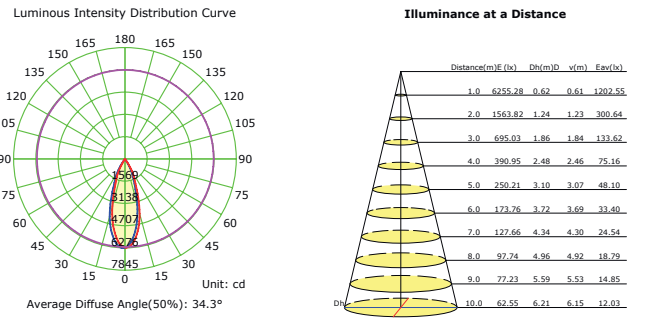

LED 40W 3000K 38°

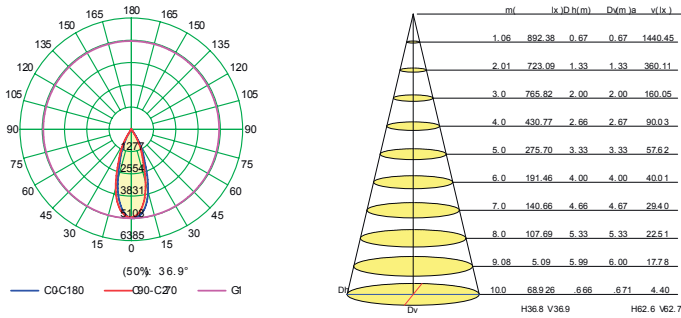

LED 40W 4000K 38°

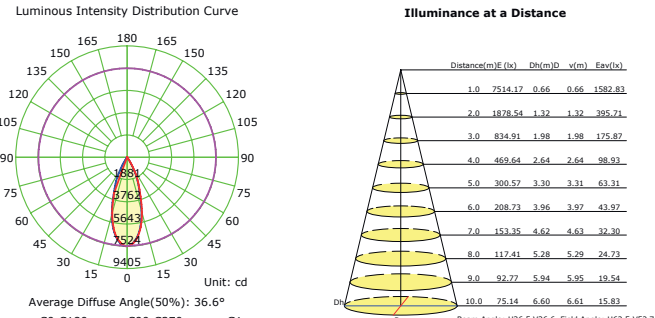

CARRILES trifásicos

GLOBAL

CARRIL DE SUPERFICIE-SURFACE MOUNTED TRACK

XTS 41002 Negro-Black


XTS 41003 Blanco-White

Track length 1000 mm

XTS 42002 Negro-Black

XTS 42003 Blanco-White

Track length 2000 mm

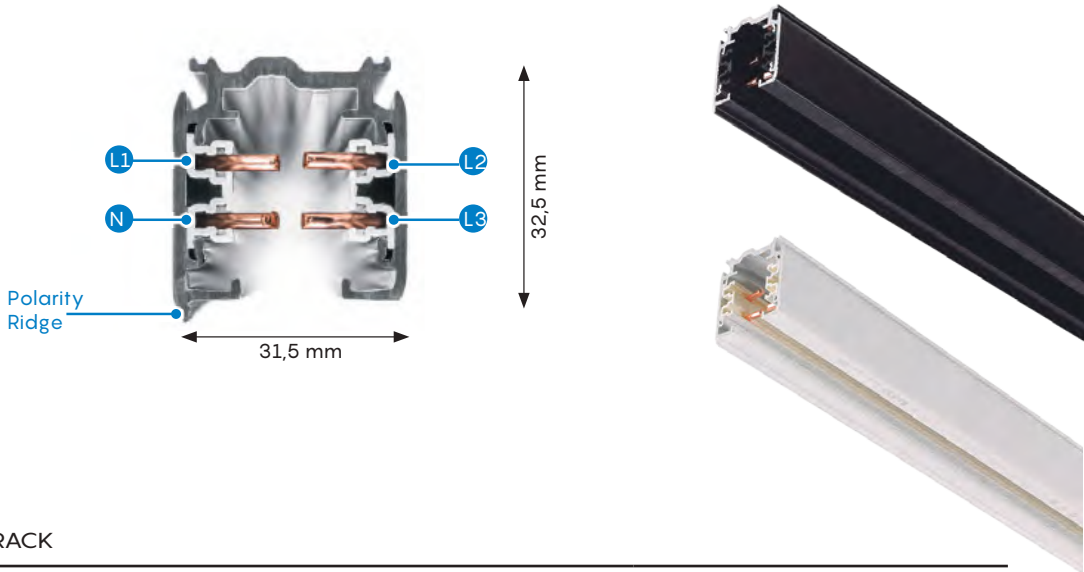

CARRIL DE EMPOTRAR-RECESSED TRACK

XTSF41002 Negro-Black


XTSF41003 Blanco-White

Track length 1000 mm


XTSF42002 Negro-Black

XTSF 42003 Blanco-White

Track length 2000 mm

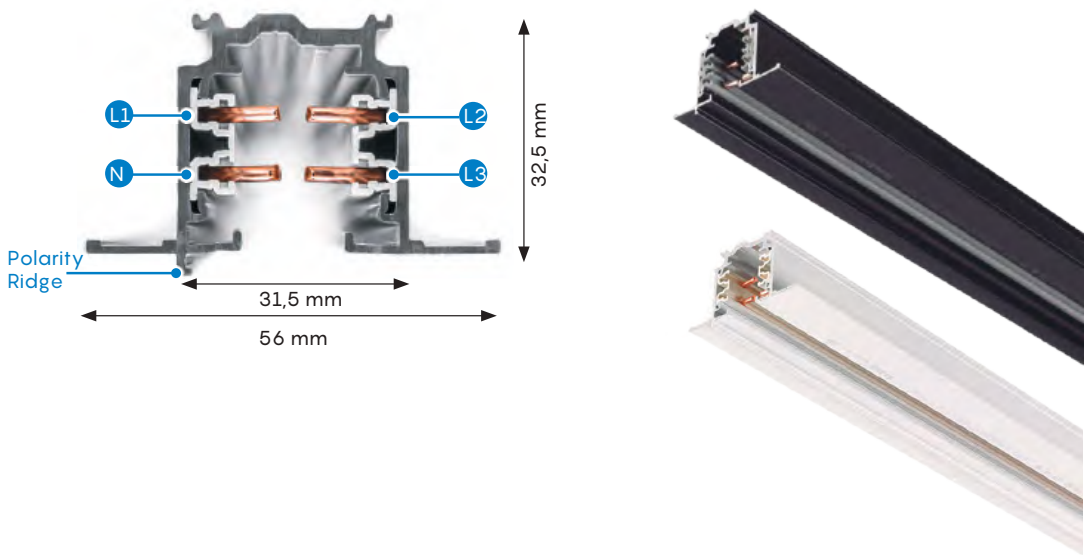

Power Conductor Cross-Section: 4,0mm²

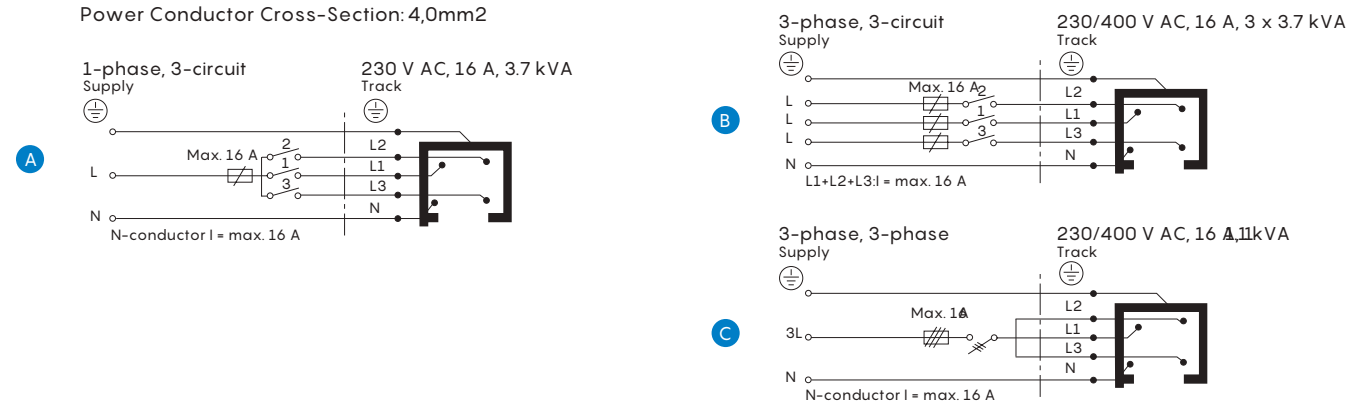

GLOBAL

FINAL ALIMENTADOR POLARIDAD DERECHA-END FEED POLARITY RIGHT

XTS 112 Negro-Black

XTS 113 Blanco-White



FINAL ALIMENTADOR POLARIDAD IZQUIERDA-END FEED POLARITY LEFT

XTS 122 Negro-Black

XTS 123 Blanco-White



TAPA FINAL-END CAP

XTS 412 Negro-Black

XTS 413 Blanco-White



PLACA PARA CUBRIR EN CARRILES EMPOTRADOS -PLATE TO COVER IN RECESSED TRACKS

XTSF 102 Negro-Black **XTS112/XTS122/XTS142**

XTSF 103 Blanco-White **XTS113/XTS123/XTS143**



XTSF 302 Negro-Black **XTS342/XTS352**

XTSF 303 Blanco-White **XTS343/XTS353**



LEVA FIJACIÓN TECHO FUNDICIÓN PARA CARRILES SUPERFICIE-STANDARD CLAMP DIE CAST FOR SURFACE TRACK

SKB 122 Negro-Black

SKB 123 Blanco-White



KIT SUSPENSION CARRIL 1,5 M -SUSPENSION KIT 1,5 M

SPW11SK 215 length 1500 mm Negro-Black

SPW11SK 315 length 1500 mm Blanco-White



CARRILES
trifásicos



ALIMENTADOR INTERMEDIO RECTO-MIDDLE FEED STRAIGHT

XTS 142 Negro-Black

XTS 143 Blanco-White



CONECTOR INTERMEDIO RECTO-MIDDLE STRAIGHT CONNECTOR

XTS 212 Negro-Black

XTS 213 Blanco-White



CONECTOR ESQUINA AJUSTABLE-ADJUSTABLE CORNER CONNECTOR

XTS 242 Negro-Black


XTS 243 Blanco-White



CONEXIÓN ALIMENTADOR EN L POLARIDAD INTERNA - L FEED POLARITY INTERNAL

XTS 342 Negro-Black

XTS 343 Blanco-White

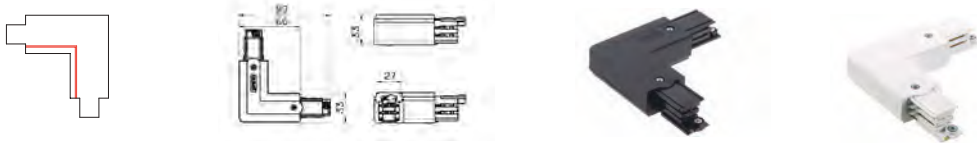

CONEXIÓN ALIMENTADOR EN L POLARIDAD EXTERNA - L FEED POLARITY EXTERNAL

XTS 352 Negro-Black


XTS 353 Blanco-White



CONEXIÓN ALIMENTADOR EN X - X FEED

XTS 382 Negro-Black

XTS 383 Blanco-White

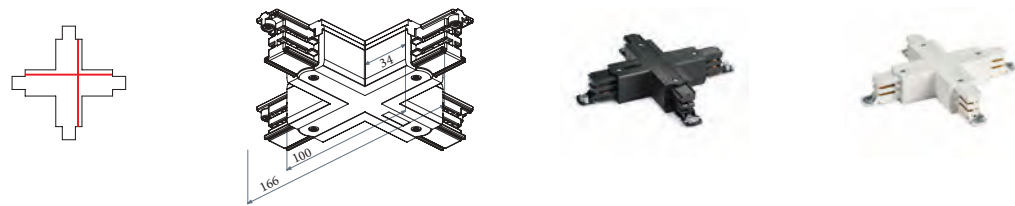

CONEXIÓN ALIMENTADOR EN T- T FEED


XTS 362 Negro-Black

XTS 363 Blanco-White



XTS 372 Negro-Black

XTS 373 Blanco-White

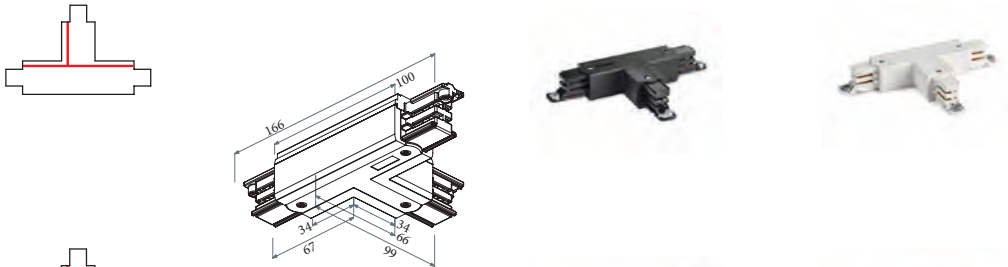


XTS 392 Negro-Black

XTS 393 Blanco-White



XTS 402 Negro-Black

XTS 403 Blanco-White

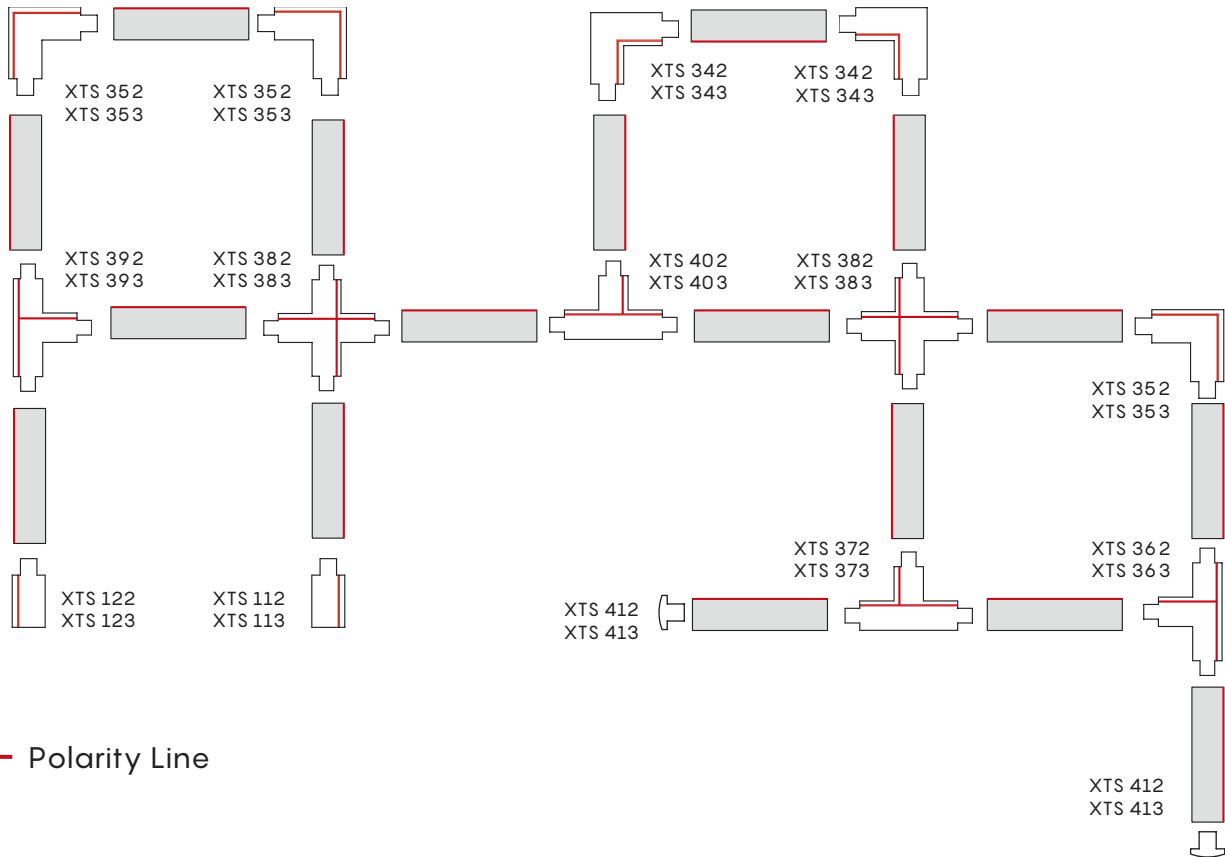

CARRILES trifásicos

New

CARRIL DE SUPERFICIE-SURFACE MOUNTED TRACK

8548 Negro-Black

8549 Blanco-White


Track length 1000 mm



8550 Negro-Black

8551 Blanco-White


Track length 2000 mm

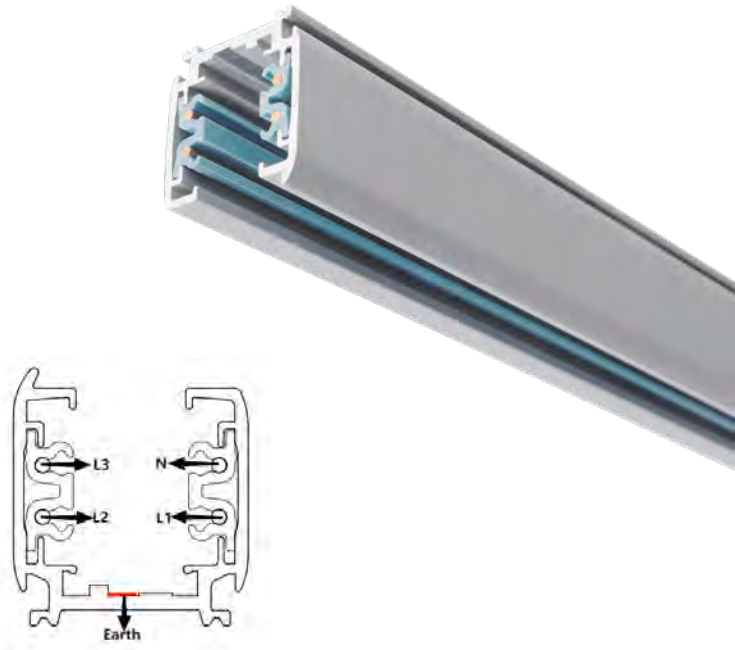

FINAL ALIMENTADOR POLARIDAD DERECHA-END FEED POLARITY RIGHT

8552 Negro-Black


8553 Blanco-White



FINAL ALIMENTADOR POLARIDAD IZQUIERDA-END FEED POLARITY LEFT

8731 Negro-Black


8732 Blanco-White



TAPA FINAL-END CAP

8554 Negro-Black


8555 Blanco-White



LEVA FIJACIÓN TECHO FUNDICIÓN PARA CARRILES SUPERFICIE-STANDARD CLAMP DIE CAST FOR SURFACE TRACK

8562 Negro-Black



8563 Blanco-White



KIT SUSPENSIÓN CARRIL 2M-SUSPENSION KIT 2M

8560 length 2000 mm Negro-Black

8561 length 2000 mm Blanco-White



CARRILES trifásicos

ALIMENTADOR INTERMEDIO RECTO-MIDDLE FEED STRAIGHT

- 8558 Negro-Black
- 8559 Blanco-White



CONECTOR INTERMEDIO RECTO-MIDDLE STRAIGHT CONNECTOR

- 8556 Negro-Black
- 8557 Blanco-White




CONEXIÓN ALIMENTADOR EN L POLARIDAD INTERNA - L FEED POLARITY INTERNAL

- 8733 Negro-Black
- 8734 Blanco-White



CONEXIÓN ALIMENTADOR EN L POLARIDAD EXTERNA - L FEED POLARITY EXTERNAL

- 8735 Negro-Black
- 8736 Blanco-White

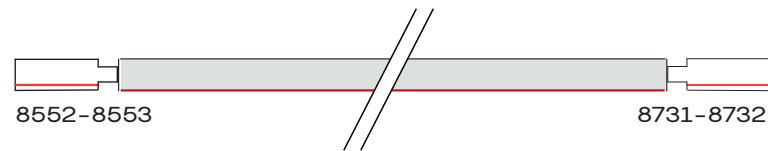

CONEXIÓN ALIMENTADOR EN T- T FEED

- 8737 Negro-Black
- 8738 Blanco-White




- 8739 Negro-Black
- 8740 Blanco-White



- 8741 Negro-Black
- 8742 Blanco-White





- 8743 Negro-Black
- 8744 Blanco-White

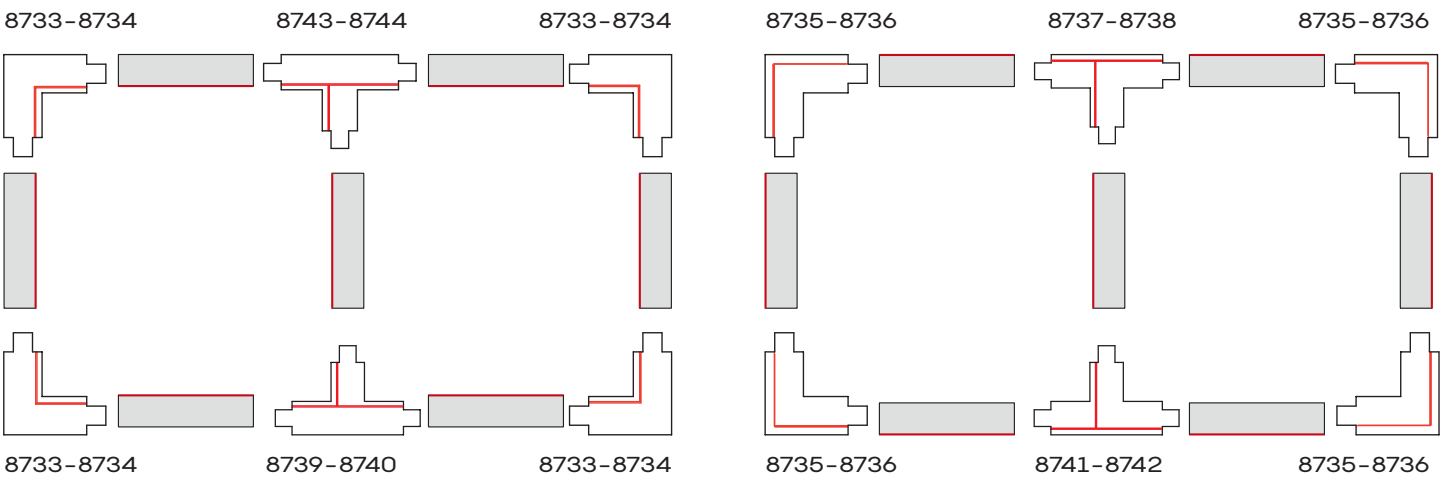

— Polarity line


Empotrables

Recessed

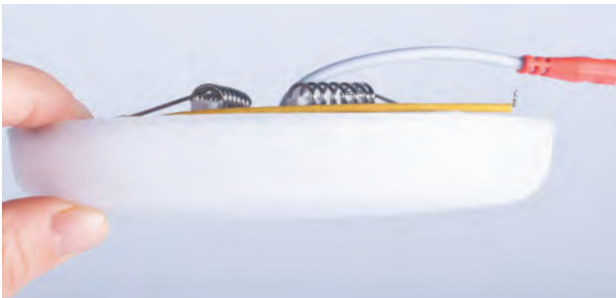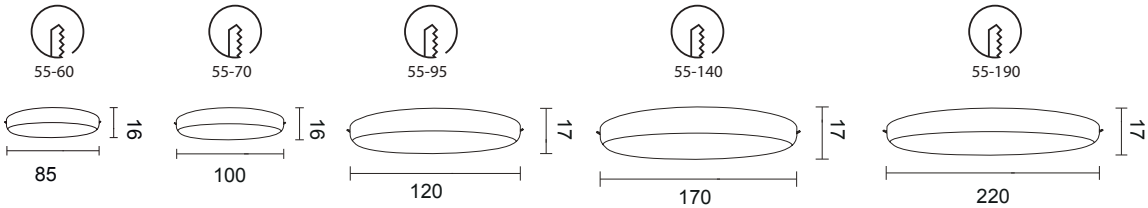

REFERENCE	K	LED WATT	LUMENS	FINISH
8678	3000K	8W	700lm	Blanco-White
8679	3000K	10W	870lm	Blanco-White
8680	3000K	15W	1300lm	Blanco-White
8681	3000K	22W	1900lm	Blanco-White
8682	3000K	32W	2800lm	Blanco-White
8683	4000K	8W	735lm	Blanco-White
8684	4000K	10W	910lm	Blanco-White
8685	4000K	15W	1400lm	Blanco-White
8686	4000K	22W	2040lm	Blanco-White
8687	4000K	32W	3000lm	Blanco-White
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium



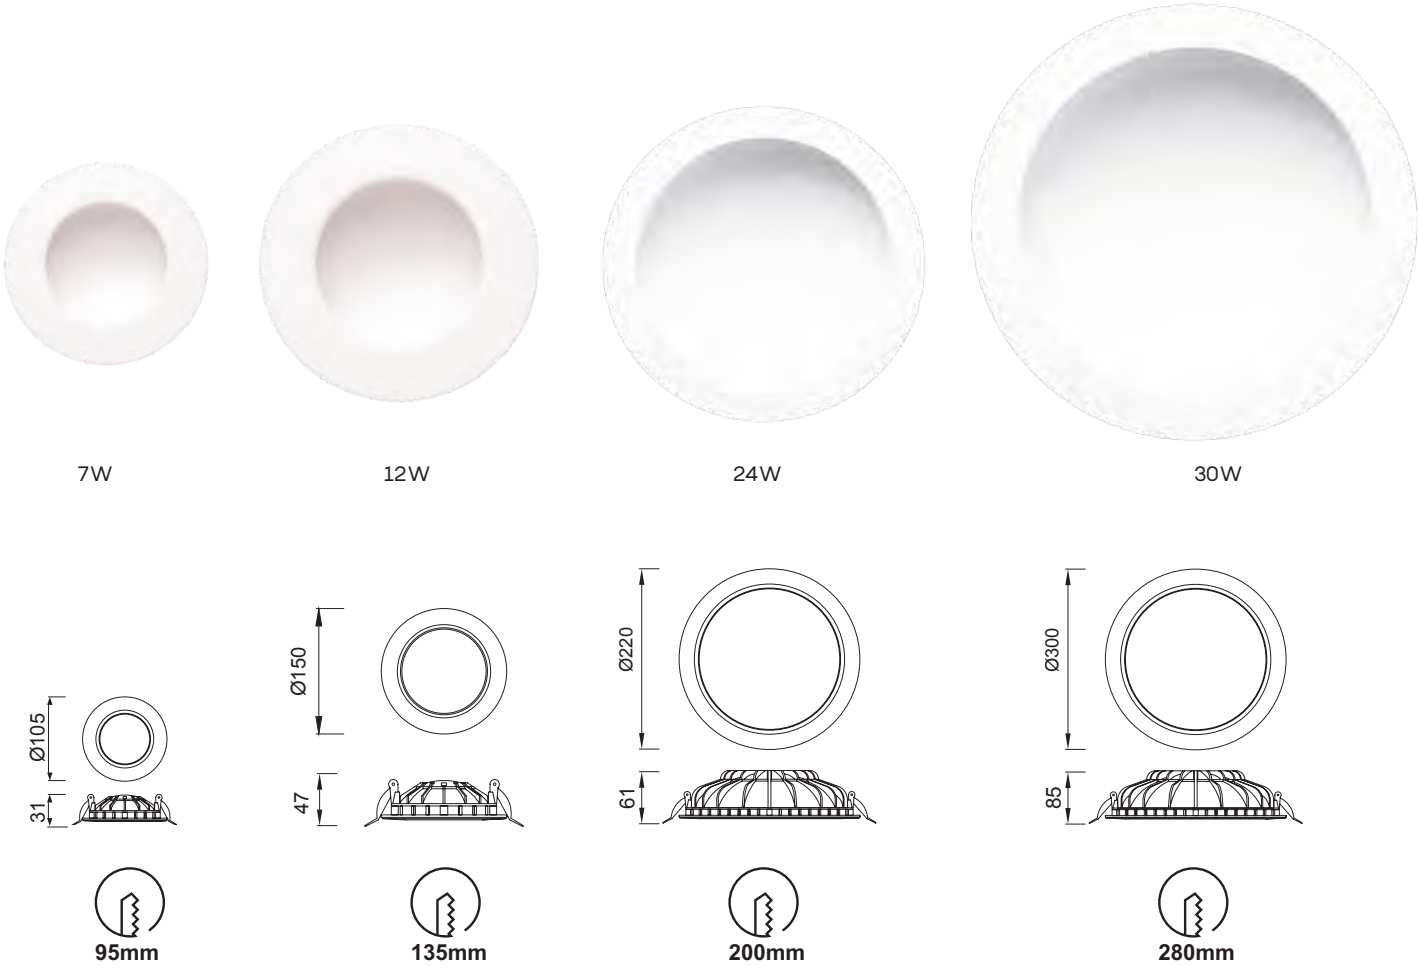


REFERENCE	K	LED WATT	LUMENS	FINISH
C0041	3000K	7W	540lm	Blanco mate-Matt white
C0042	4000K	7W	540lm	Blanco mate-Matt white
C0047	3000K	12W	1080lm	Blanco mate-Matt white
C0048	4000K	12W	1080lm	Blanco mate-Matt white
C0043	3000K	24W	2160lm	Blanco mate-Matt white
C0044	4000K	24W	2160lm	Blanco mate-Matt white
C0049	3000K	30W	2550lm	Blanco mate-Matt white
C0050	4000K	30W	2600lm	Blanco mate-Matt white
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium






Empotrable-Recessed


Indoor




80mm



130mm











160mm



210mm

REFERENCE	K	LED WATT	LUMENS	FINISH
C0184	3000K	6W	520lm	Blanco mate-Matt white
C0180	4000K	6W	540lm	Blanco mate-Matt white
C0185	3000K	12W	990lm	Blanco mate-Matt white
C0181	4000K	12W	1080lm	Blanco mate-Matt white
SPCC-PBT/PC		220-240V~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium

REFERENCE	K	LED WATT	LUMENS	FINISH
C0186	3000K	18W	1580lm	Blanco mate-Matt white
C0182	4000K	18W	1620lm	Blanco mate-Matt white
C0187	3000K	24W	2090lm	Blanco mate-Matt white
C0183	4000K	24W	2200lm	Blanco mate-Matt white
SPCC-PBT/PC		220-240V~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium






Empotrable-Recessed

Indoor



REFERENCE	K	LED WATT	LUMENS	FINISH
C0194	3000K	6 W	520lm	Blanco mate-Matt white
C0190	4000K	6 W	540lm	Blanco mate-Matt white
C0195	3000K	12 W	990lm	Blanco mate-Matt white
C0191	4000K	12 W	1080lm	Blanco mate-Matt white
SPCC-PBT/PC		220-240V~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium

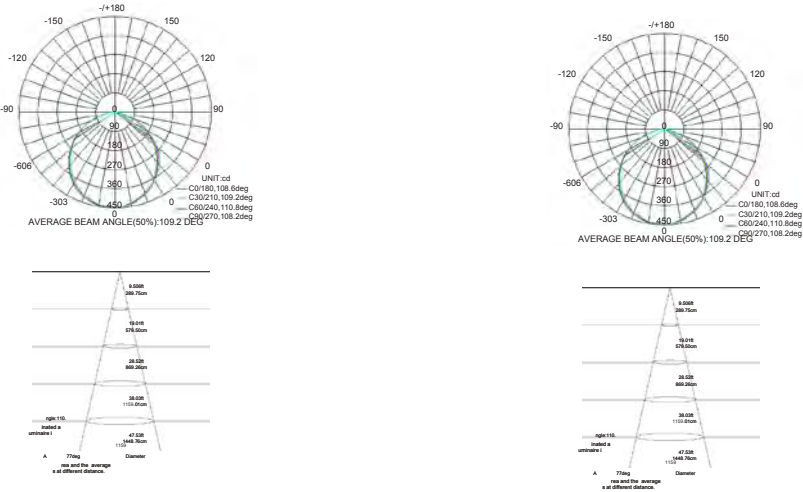

LED life / LED vida

30,000 h

ON / OFF

30,000

garantia mantraco

5

WARRANTY

GARANTIA

LED



LED

INCLUDED

IP20



REFERENCE	K	LED WATT	LUMENS	FINISH
C0196	3000K	18 W	1580lm	Blanco mate-Matt white
C0192	4000K	18 W	1620lm	Blanco mate-Matt white
C0197	3000K	24 W	2090lm	Blanco mate-Matt white
C0193	4000K	24 W	2200lm	Blanco mate-Matt white
SPCC-PBT/PC		220-240V~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium

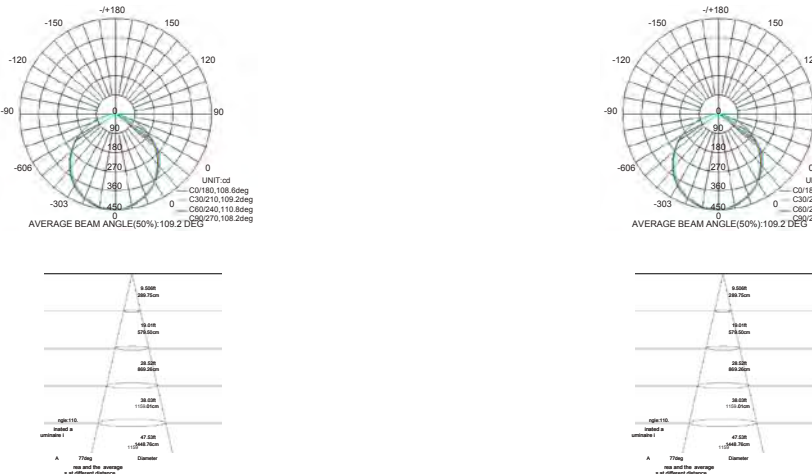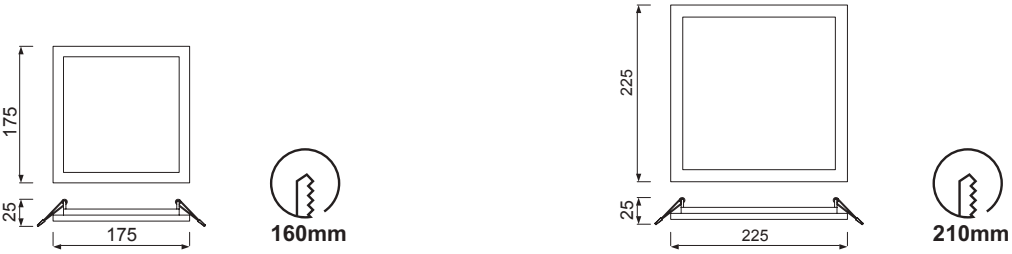

LED life / LED vida

30,000 h

ON / OFF

30,000

garantia mantraco

5

WARRANTY

GARANTIA

LED

LED


INCLUDED

IP20


MEDANO

Empotrable-Recessed

Indoor
UGR<19

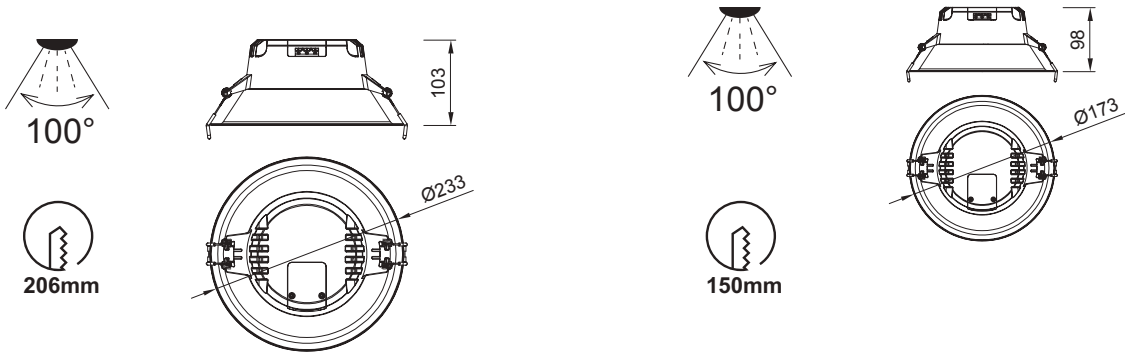

REFERENCE	K	LED WATT	LUMENS	FINISH
6398	3000K	12W	1100lm	Blanco mate-Matt white
6399	4000K	12W	1200lm	Blanco mate-Matt white
6395	3000K	21W	1900lm	Blanco mate-Matt white
		SPCC-PBT/PC	220-240V ~ 50/60Hz CRI:≥ 80	Aluminio-Aluminium

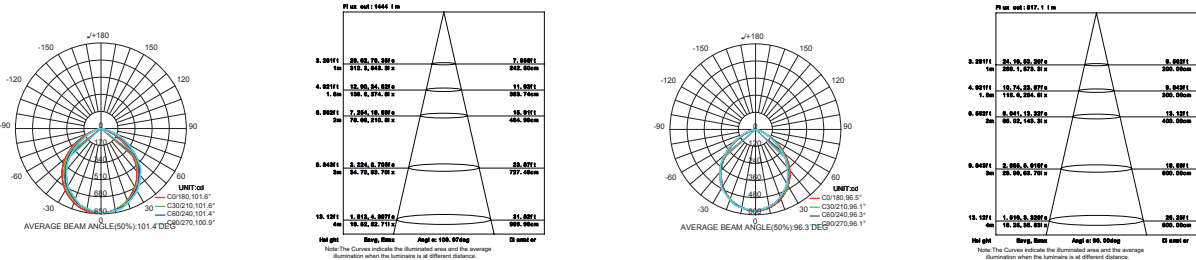

UGR<19

LED life / LED vida
30.000 h


ON / OFF
30.000

garantía mantraco 5 años
WARRANTY GARANTIA LED


LED INCLUDED

IP20

GRACIOSA

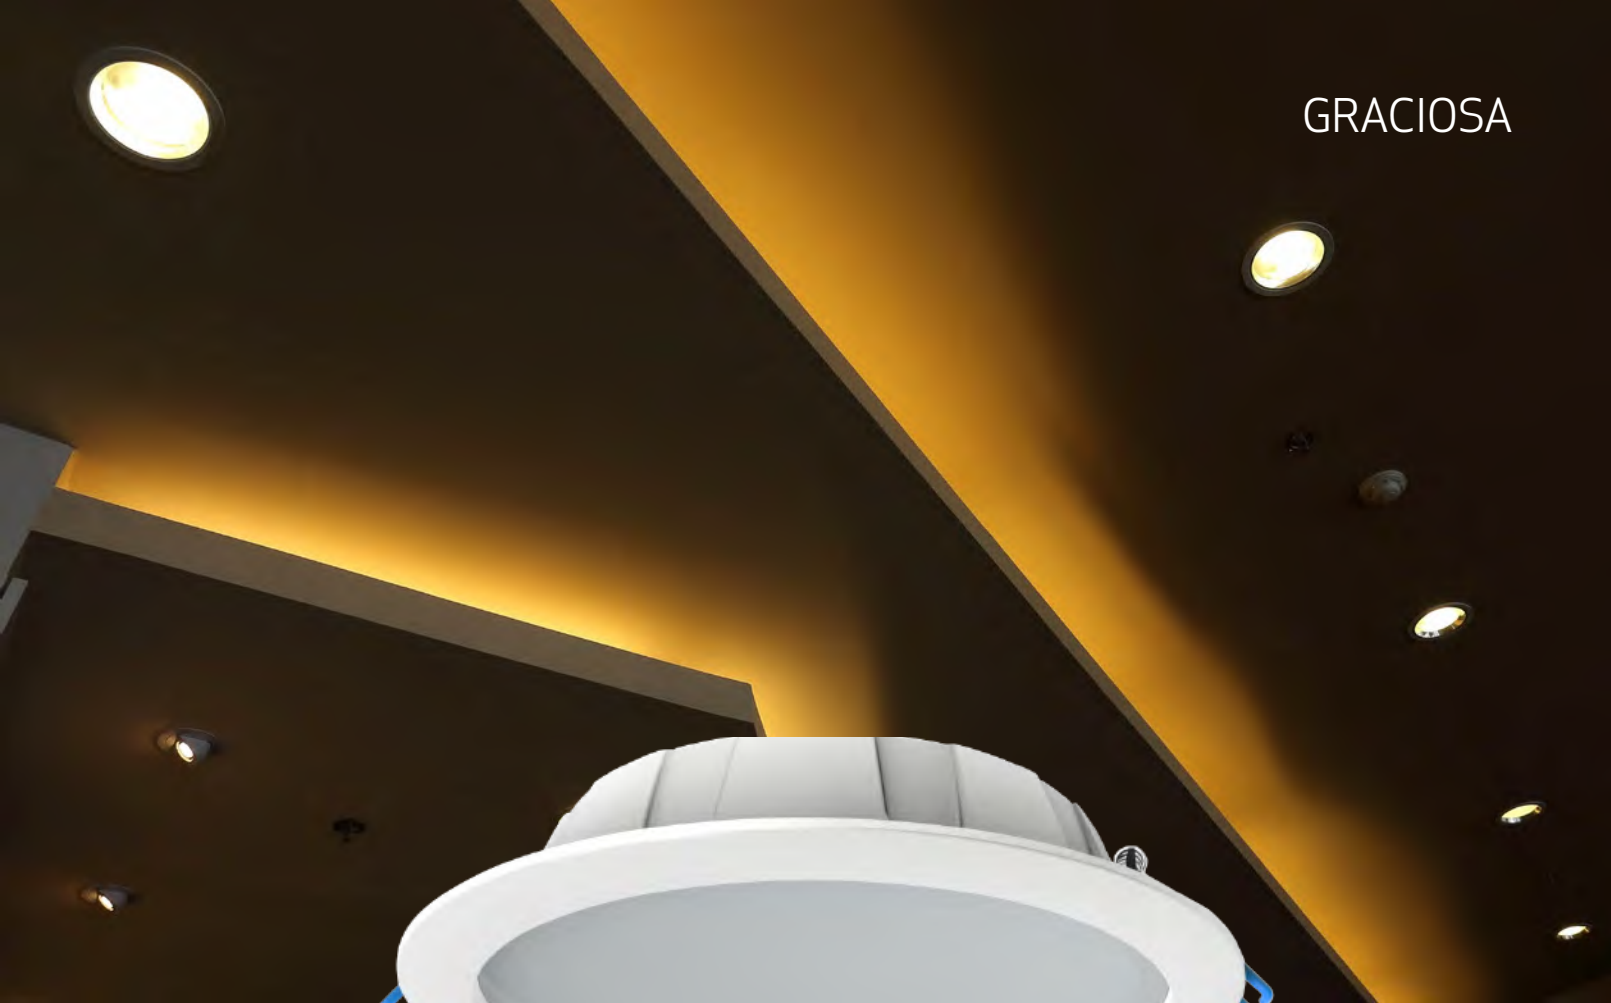

REFERENCE	K	LED WATT	LUMENS	FINISH	SIZES
6390	3000K	24,5W	1900lm	Blanco mate-Matt white	Ø235
		220-240V ~ 50/60Hz CRI:≥ 80		Aluminio-Aluminium	

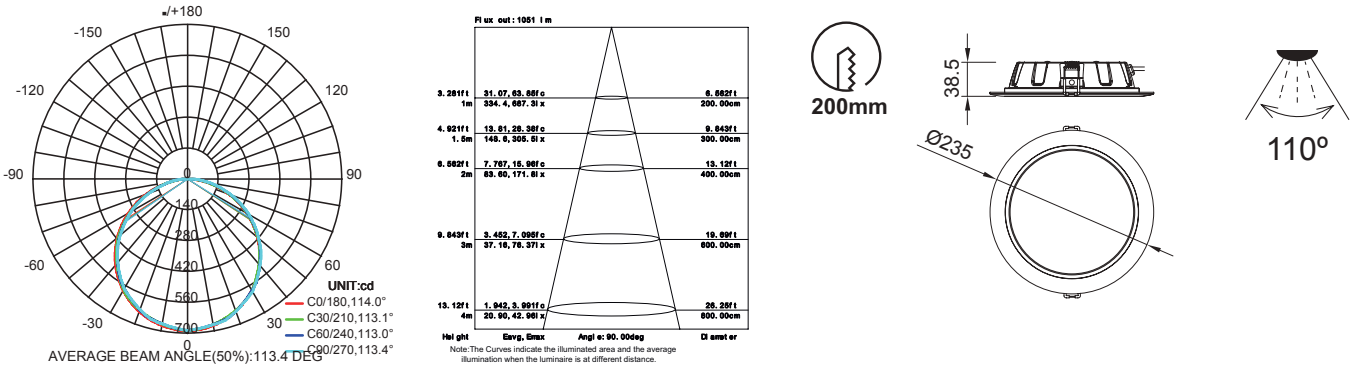

ErP COMPLIANT
RoHS compliant

110°

LED life / LED vida
30.000 h

ON / OFF
30.000

garantía mantraco 5 años
WARRANTY GARANTIA LED


LED INCLUDED

IP44



TRIMASI 5W
New

Empotrable-Recessed

Indoor




Base empotrar-Recessed base	
REFERENCE	FINISH
8447	Blanco mate-Matt white
8448	Negro mate-Matt black






REFERENCE	K	LED WATT	LUMENS	FINISH
8449	3000K	5W	400lm	Oro-Gold
8450	3000K	5W	400lm	Blanco-White
8451	3000K	5W	400lm	Negro-Black
220-240V~50/60Hz CRI≥ 90				Aluminio-Aluminium






Base empotrar-Recessed base

REFERENCE	FINISH
8452	Blanco mate-Matt white
8453	Negro mate-Matt black




REFERENCE	K	LED WATT	LUMENS	FINISH
8454	3000K	7W	560lm	Oro-Gold
8455	3000K	7W	560lm	Blanco-White
8456	3000K	7W	560lm	Negro-Black
220-240V~50/60Hz CRI≥ 90				Aluminio-Aluminium





REFERENCE	K	LED WATT	LUMENS	FINISH
8457	3000K	7W	560lm	Oro-Gold
8458	3000K	7W	560lm	Blanco-White
8459	3000K	7W	560lm	Negro-Black
220-240V~50/60Hz CRI≥ 90				Aluminio-Aluminium





SUNSET
New


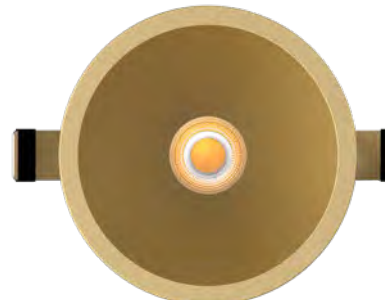


1 FRAME					2 HEAT SINKER TEMP		3 DRIVER		
	SIZE	REFERENCE	FINISH	MEASURES	REFERENCE	HEAT SINK TEMP & WATTS	REFERENCE	DRIVER	
 55	S	8768	Blanco-White	Ø65*H74	8771	6 W - 2700 K 510 lm	8774	ON/OFF	
		8769	Negro-Black		8772	6 W - 3000 K 525 lm	8775	CUT PHASE	
		8770	Oro-Gold		8773	6 W - 4000 K 560 lm	8776	DALI/PUSH	DALI 
 75	M	8777	Blanco-White	Ø85*H87	8780	10 W - 2700 K 765lm	8783	ON/OFF	
		8778	Negro-Black		8781	10 W - 3000 K 800lm	8784	cut phase	
		8779	Oro-Gold		8782	10 W - 4000 K 860lm	8785	DALI/PUSH	DALI 
 95	L	8786	Blanco-White	Ø108*H98	8789	15 W - 2700 K 980lm	8792	ON/OFF	
		8787	Negro-Black		8790	15 W - 3000 K 1070lm	8793	CUT PHASE	
		8788	Oro-Gold		8791	15 W - 4000 K 1125lm	8794	DALI/PUSH	DALI 
 150	XL	8795	Blanco-White	Ø165*H138	8798	20W - 2700 K 1660lm	8801	ON/OFF	
		8796	Negro-Black		8799	20W - 3000 K 1770lm	8802	CUT PHASE	
		8797	Oro-Gold		8800	20W - 4000 K 1950lm	8803	DALI/PUSH	DALI 
	XL	8795	Blanco-White	Ø165*H138	8798	30 W - 2700 K 2350lm	8804	ON/OFF	
		8796	Negro-Black		8799	30 W - 3000 K 2490lm	8805	CUT PHASE	
		8797	Oro-Gold		8800	30 W - 4000 K 2690lm	8806	DALI/PUSH	DALI 
 200	XXL	8807	Blanco-White	Ø215*H152	8810	30W - 2700K 2330lm	8804	ON/OFF	
		8808	Negro-Black		8811	30W - 3000K 2495lm	8805	CUT PHASE	
		8809	Oro-Gold		8812	30W - 4000K 2665lm	8806	DALI/PUSH	DALI 
	XXL	8807	Blanco-White	Ø215*H152	8810	40 W - 2700K 3045lm	8813	ON/OFF	
		8808	Negro-Black		8811	40 W - 3000K 3215lm	8814	CUT PHASE	
		8809	Oro-Gold		8812	40 W - 4000K 3480lm	8815	DALI/PUSH	DALI 
Aluminio-Aluminium					220-240V~50/60Hz CRI≥ 90				

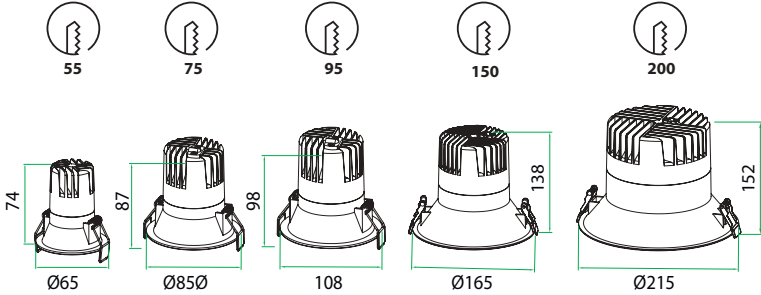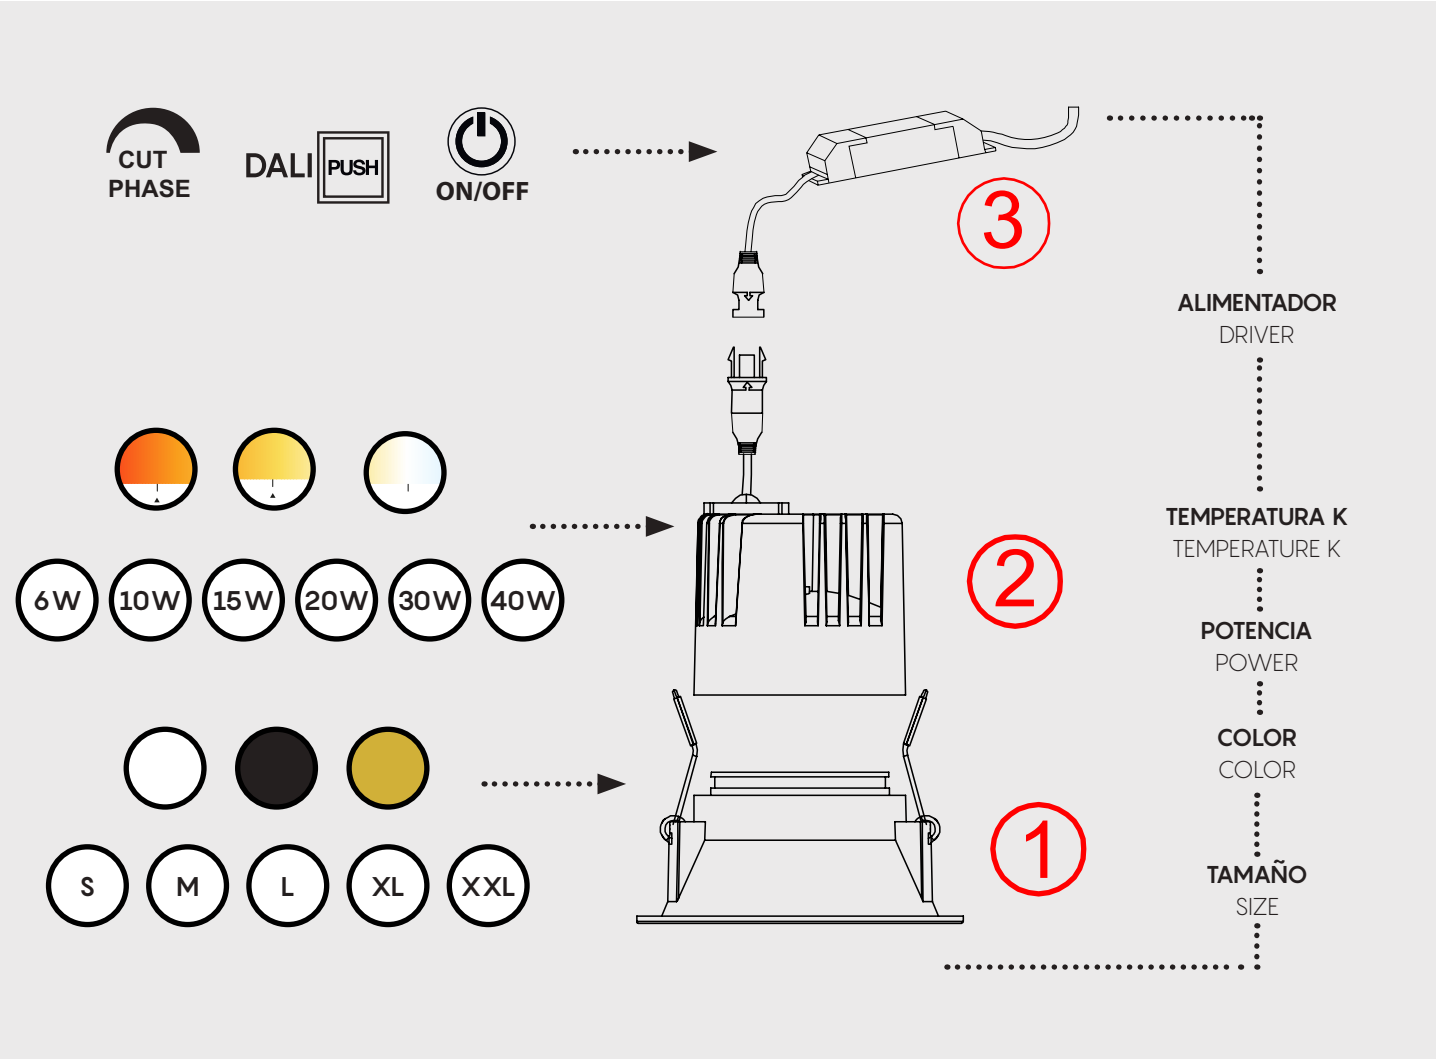

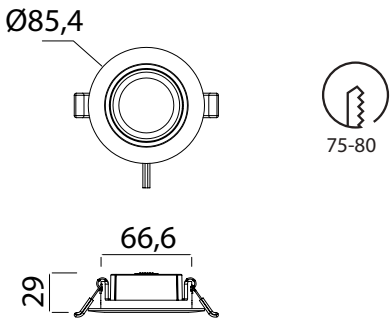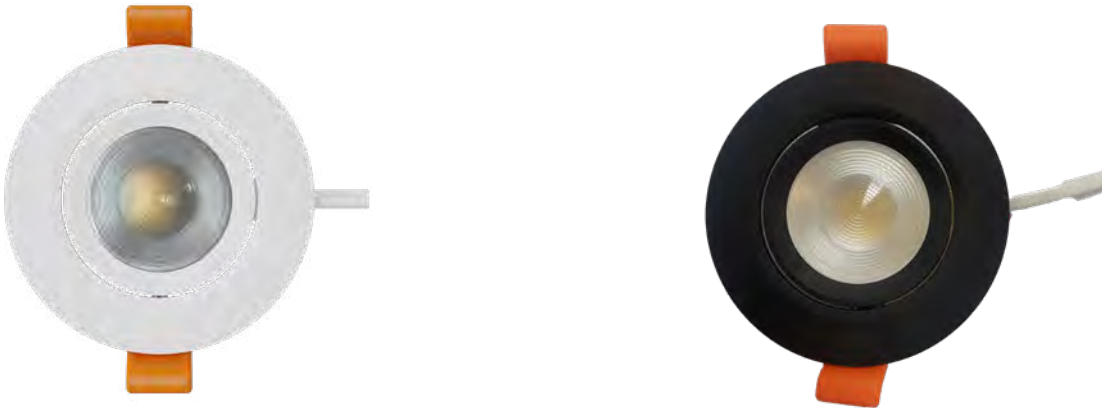

REFERENCE	CCT switch	LED WATT	LUMENS	FINISH
8762	3000K-4000K-5000K	6W	480lm	Blanco-White
8763	3000K-4000K-5000K	6W	480lm	Negro-Black
220-240V~ 50/60Hz CRI:≥ 80				Aluminio/PC-Aluminium/PC

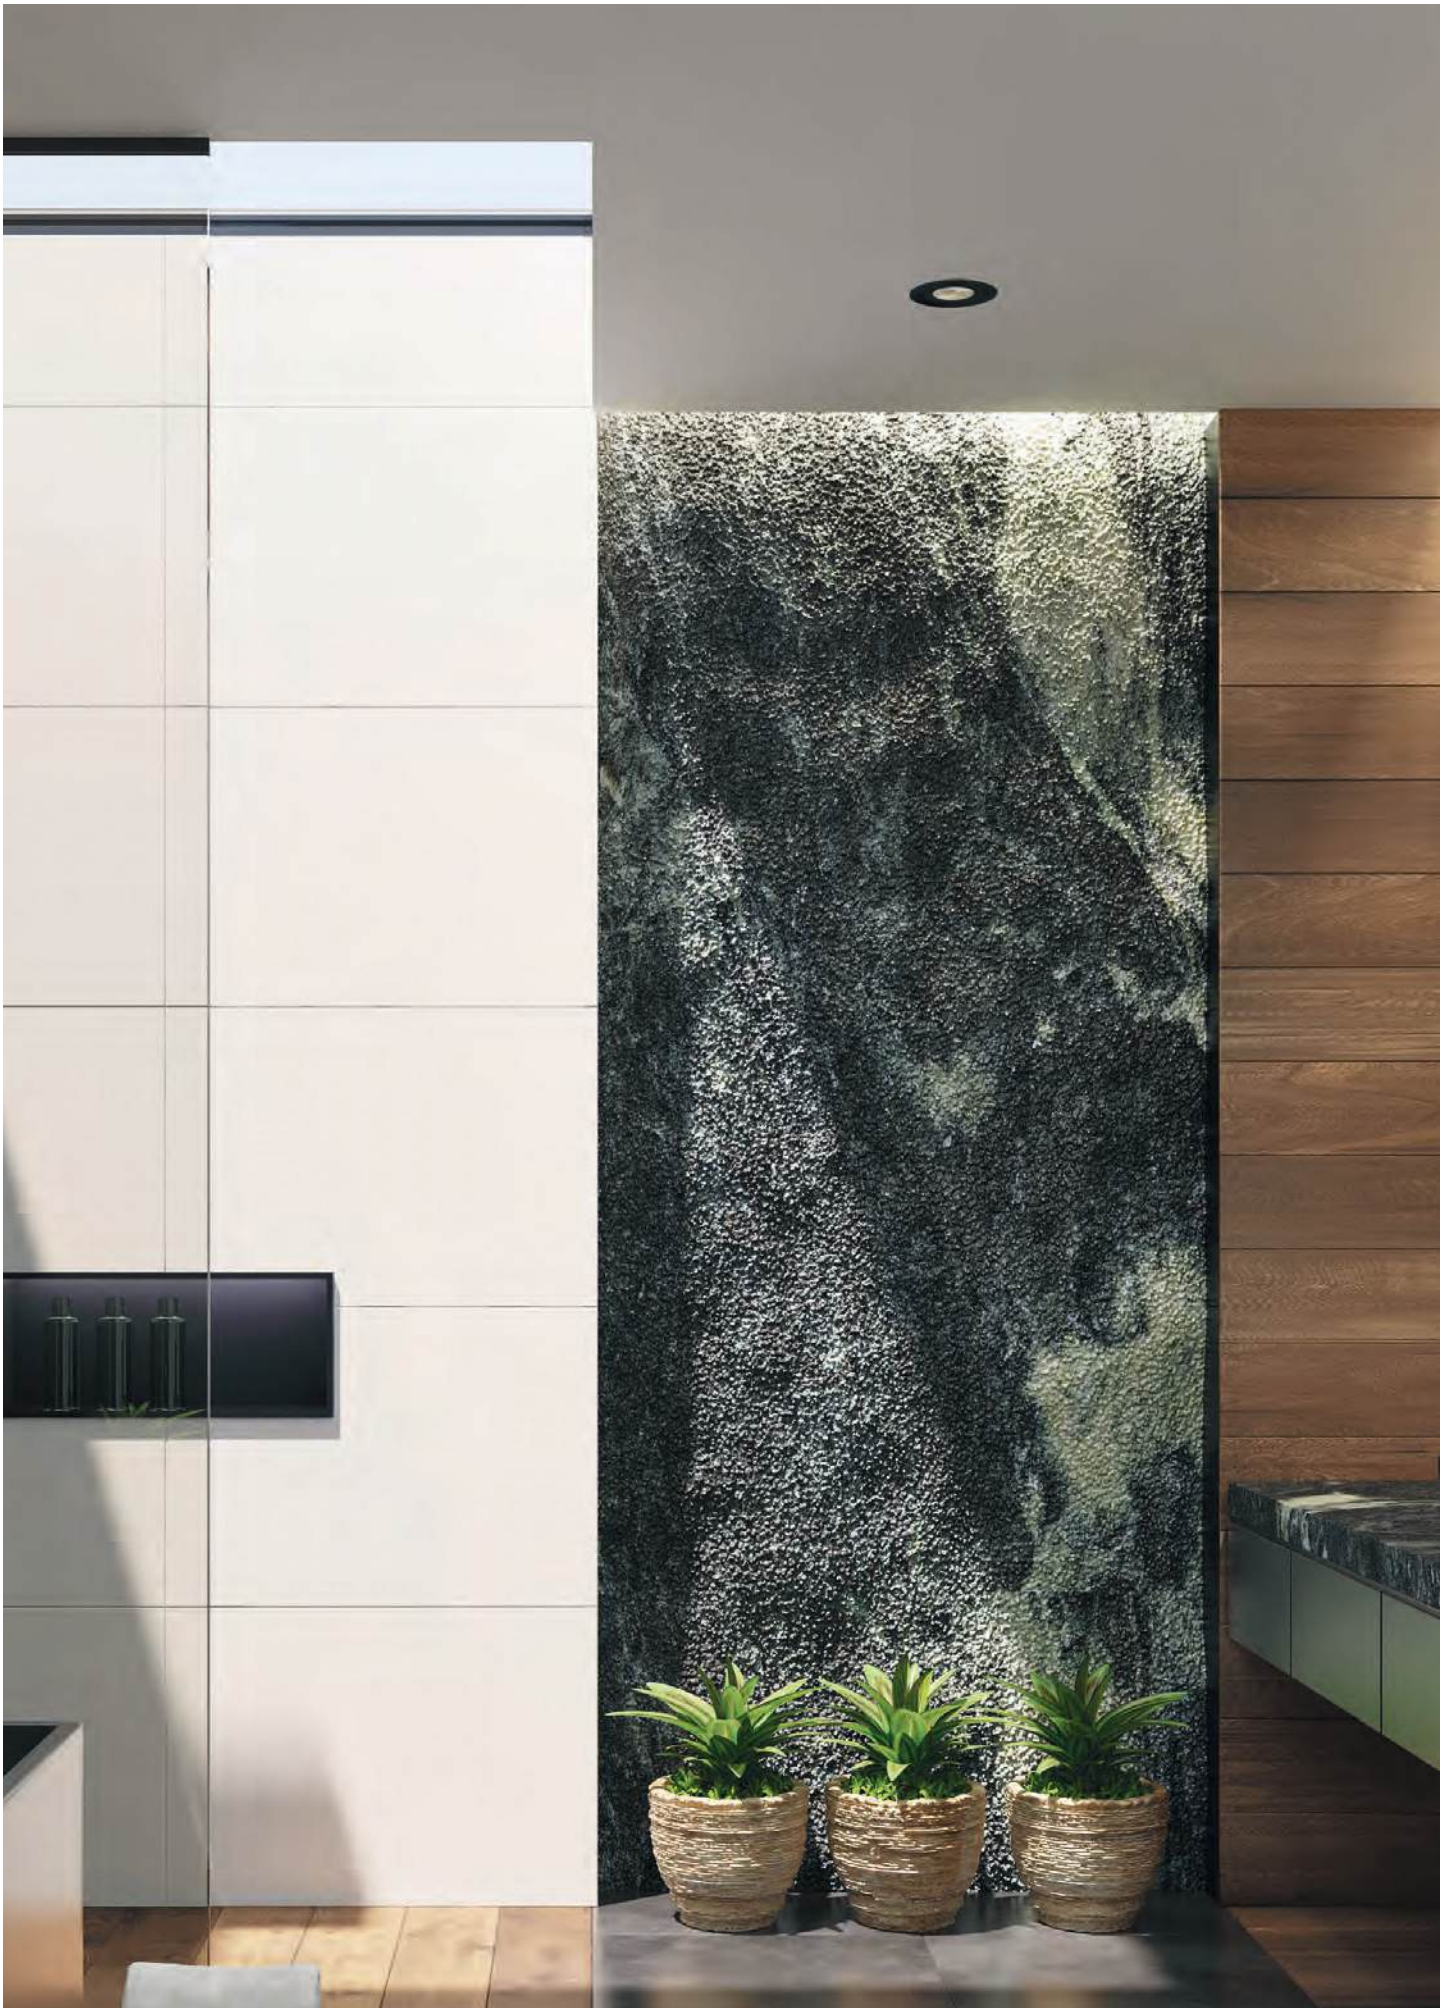





C0073-C0074



C0071-C0072

REFERENCE	K	LED WATT	LUMENS	FINISH
C0071	3000K	7W	610lm	Blanco mate-Matt white
C0072	4000K	7W	650lm	Blanco mate-Matt white
C0073	3000K	12W	1040lm	Blanco mate-Matt white
C0074	4000K	12W	1080lm	Blanco mate-Matt white
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium





C0077-C0078




C0075-C0076


REFERENCE	K	LED WATT	LUMENS	FINISH
C0075	3000K	7W	610lm	Blanco mate-Matt white
C0076	4000K	7W	650lm	Blanco mate-Matt white
C0077	3000K	12W	1040lm	Blanco mate-Matt white
C0078	4000K	12W	1080lm	Blanco mate-Matt white
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium




C0073

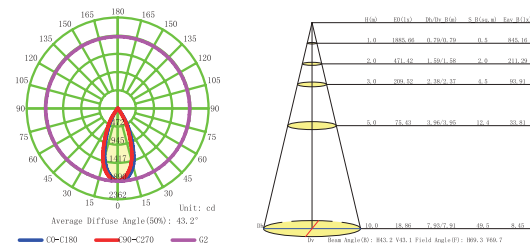


C0077

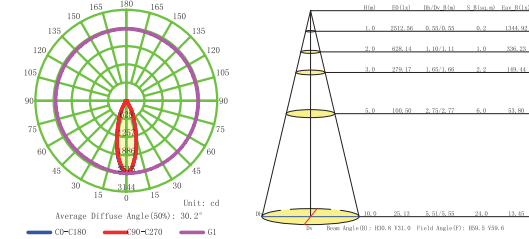


C0074

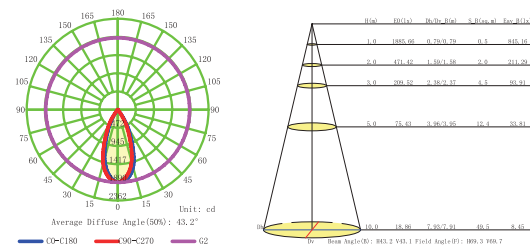


C0078

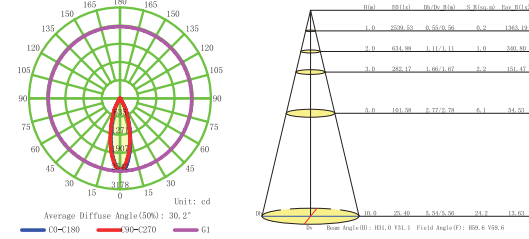


C0071

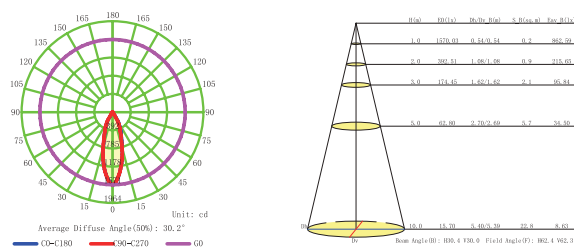


C0075

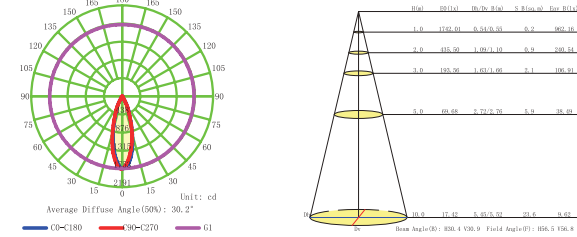

C0072

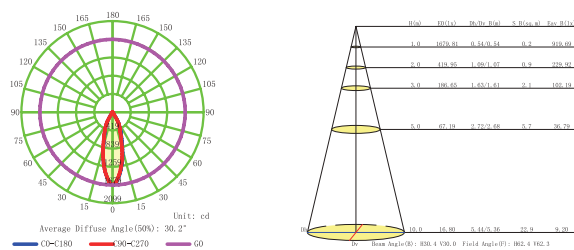



C0076

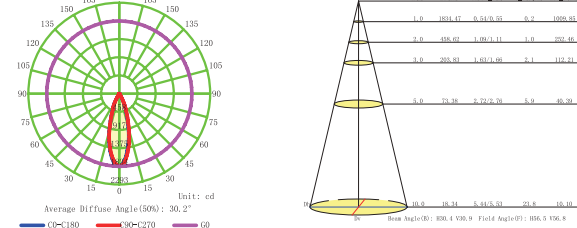






REFERENCE	K	LED WATT	LUMENS	FINISH
7829	2700K	7W	610lm	Blanco-White
7831	2700K	7W	610lm	Negro-Black
6400	3000K	7W	610lm	Blanco-White
7833	3000K	7W	610lm	Negro-Black
6401	4000K	7W	630lm	Blanco-White
7830	2700K	12W	1020lm	Blanco-White
7832	2700K	12W	1020lm	Negro-Black
6402	3000K	12W	1020lm	Blanco-White
7834	3000K	12W	1020lm	Negro-Black
6403	4000K	12W	1080lm	Blanco-White
220-240V~ 50/60Hz CRI:≥ 80				Aluminio ABS - Aluminium

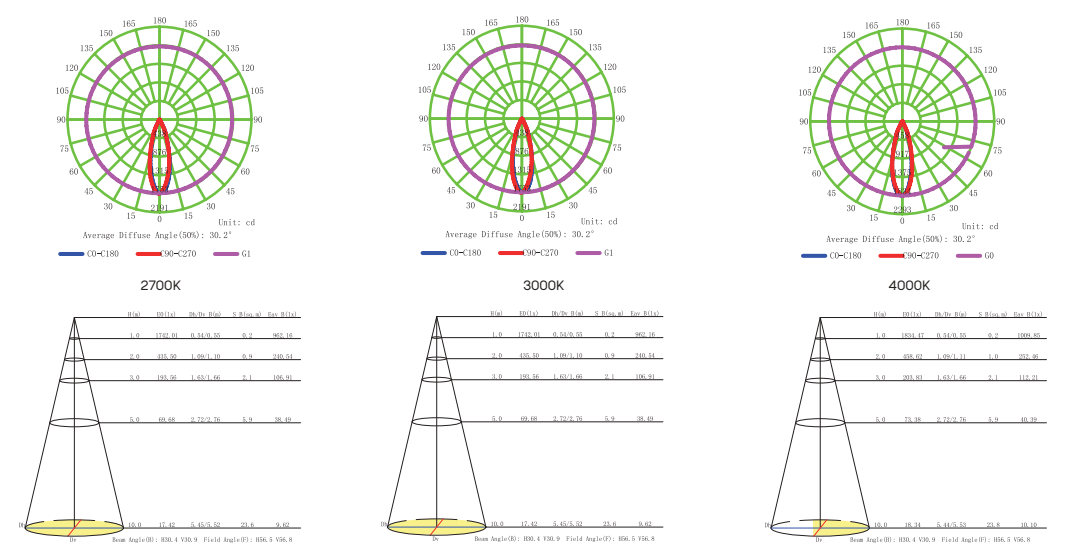

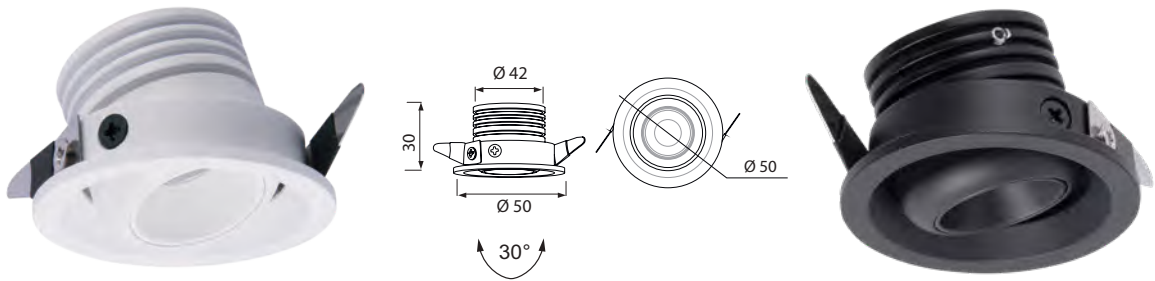

REFERENCE	K	LED WATT	LUMENS	FINISH
7827	2700K	3W	210lm	Blanco-White
7828	2700K	3W	210lm	Negro-Black
7451	3000K	3W	210lm	Blanco-White
7453	3000K	3W	210lm	Negro-Black
7452	4000K	3W	220lm	Blanco-White
7454	4000K	3W	220lm	Negro-Black
100-240V~ 50/60Hz CRI:≥ 90				Aluminio-Aluminium

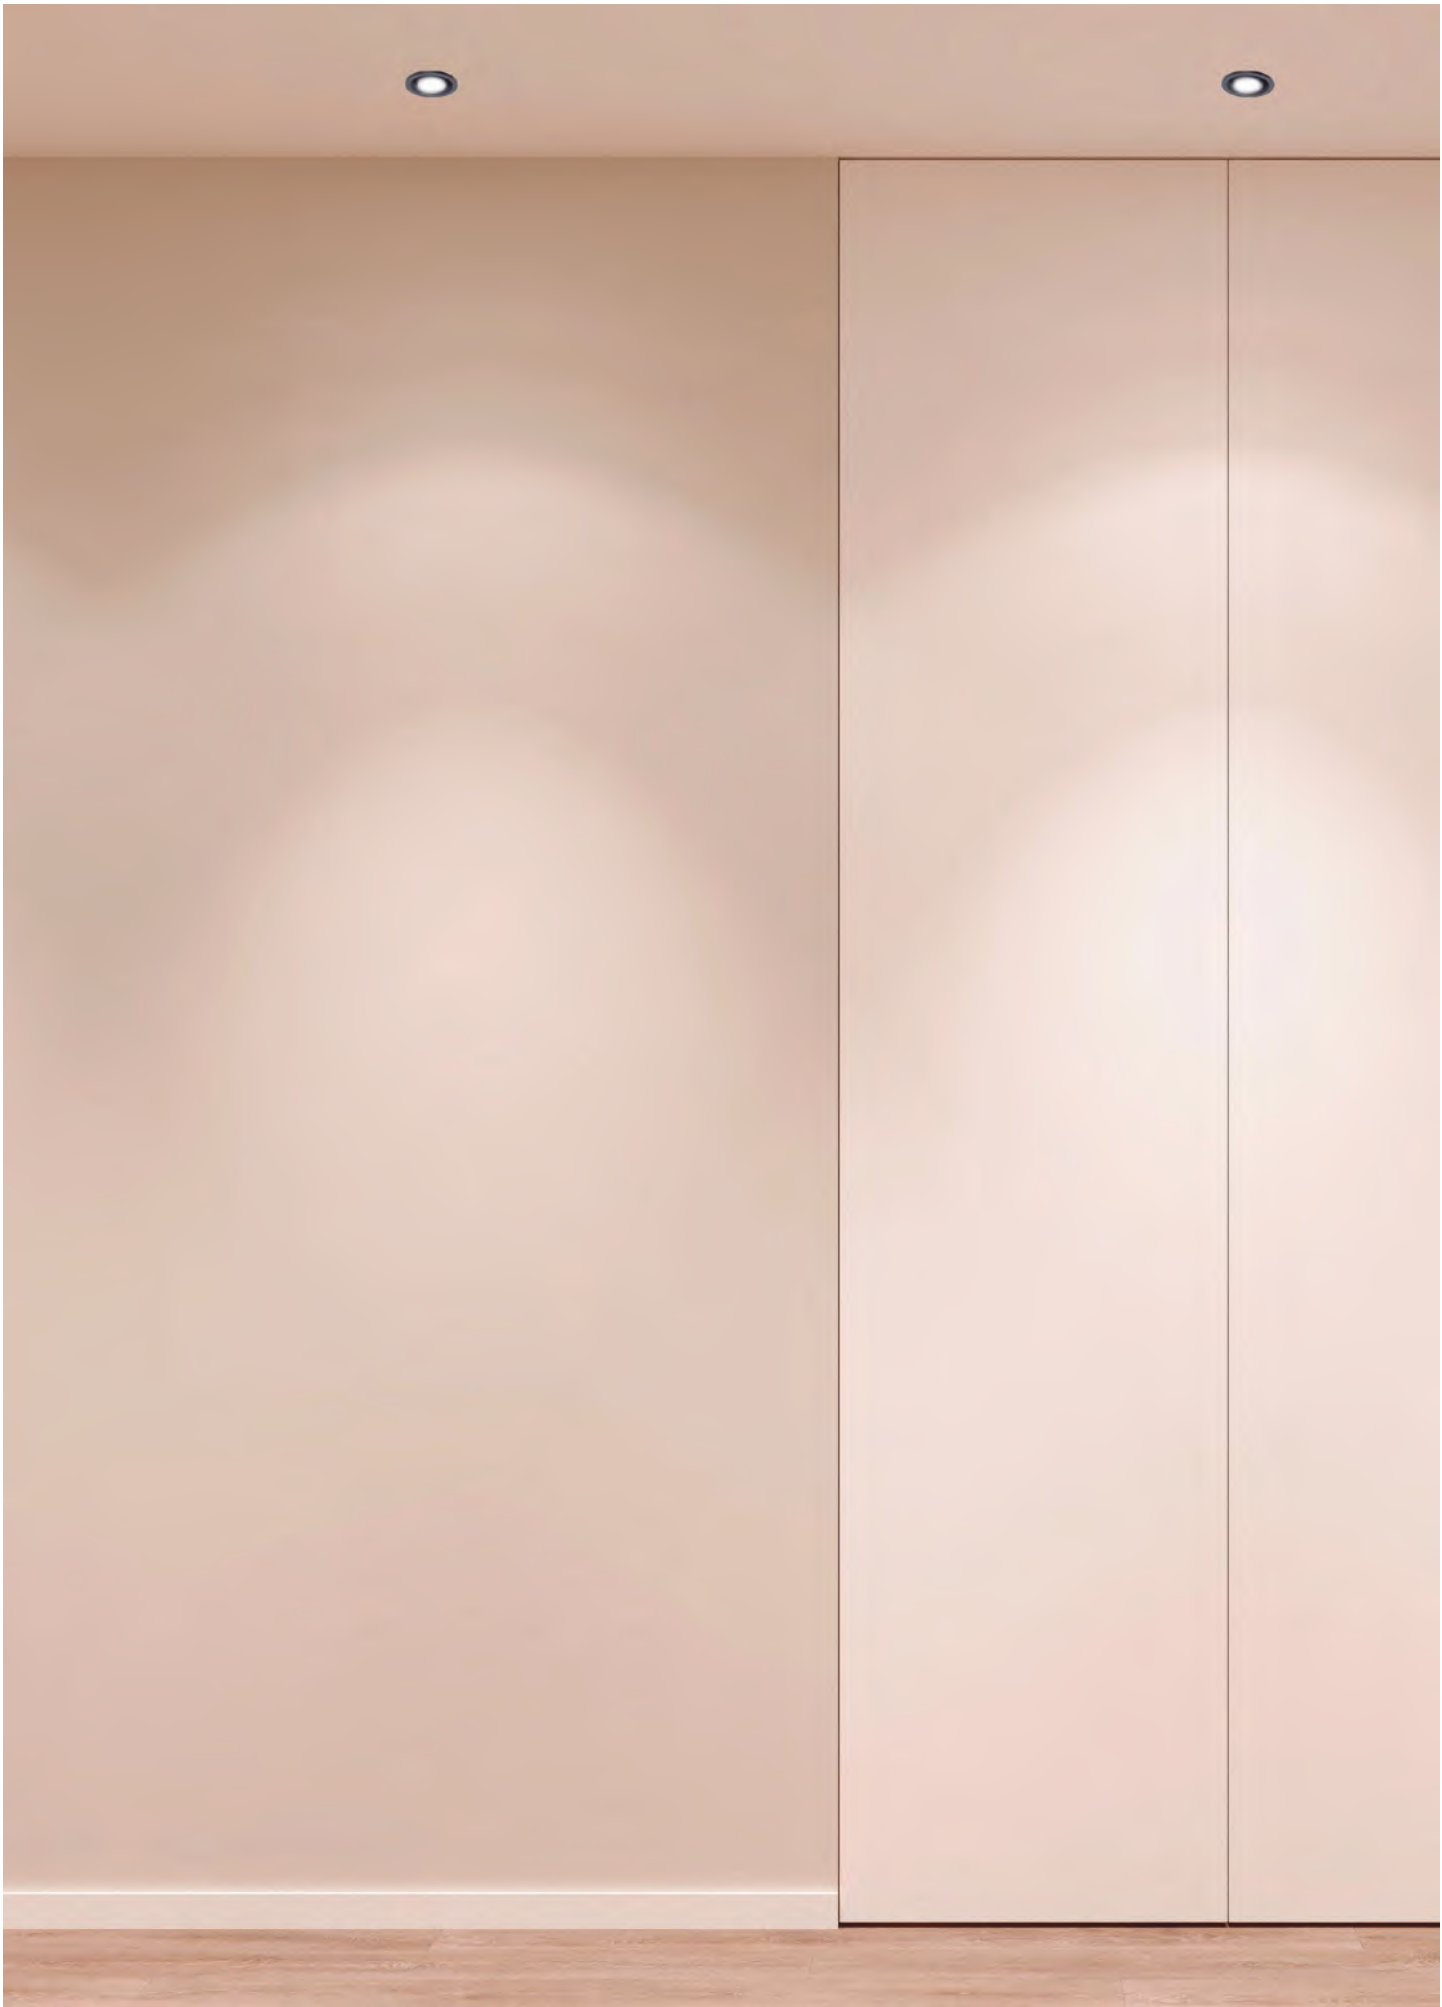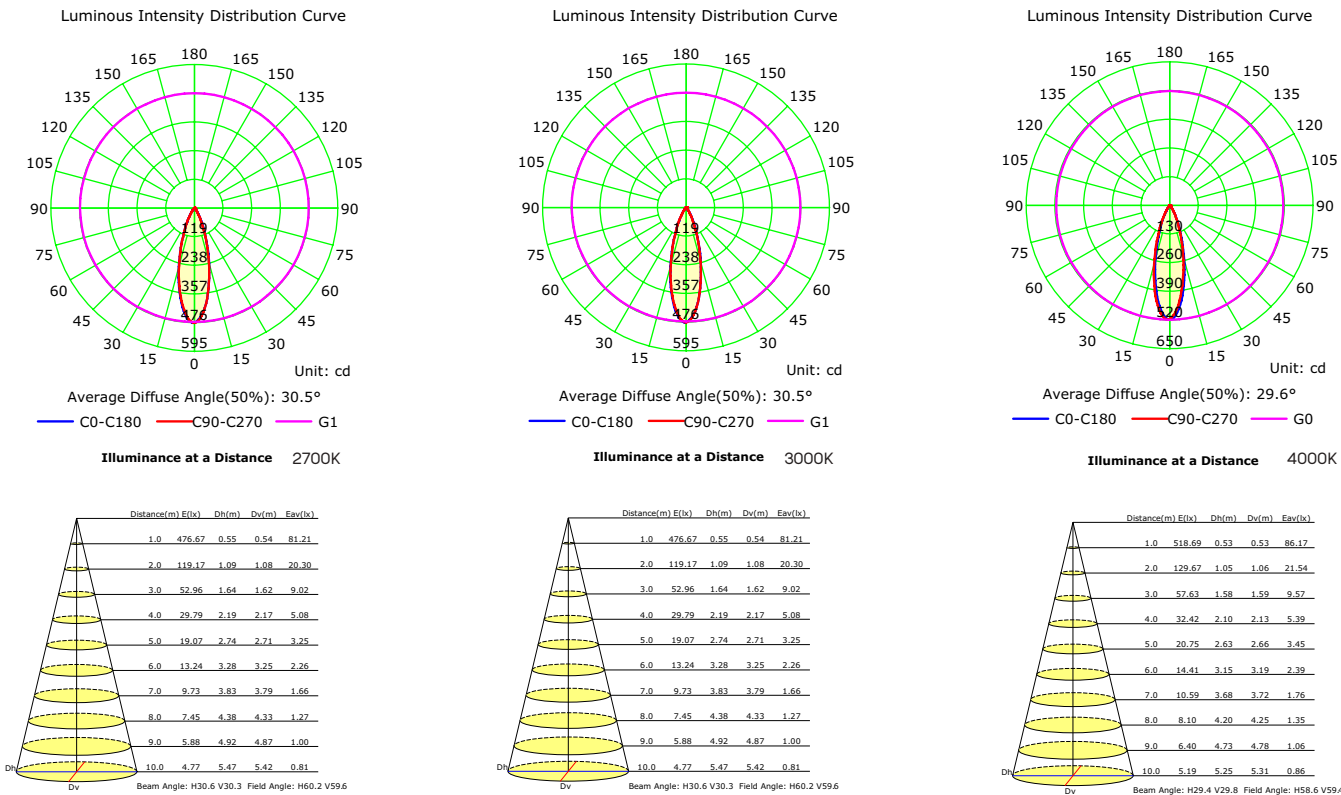

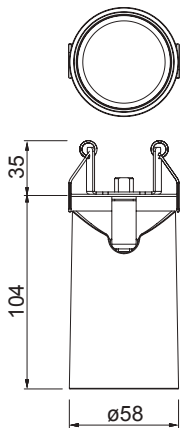

17.70€



REFERENCE	BULBS NOT INCLUDED	FINISH
8295	1 × GU10	Blanco mate-Matt white
8296	1 × GU10	Negro mate-Matt black
máx. 10W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium



Bombillas recomendadas-Suggested bulbs

K	Wat LED	Reference
3000K	6 W	R09196
4000K	6 W	R09214
5000K	6 W	R09197






8297 pág. 120	7961 pág. 90	6281 pág. 180	7523 pág. 58
------------------	-----------------	------------------	-----------------




6717 pág. 238	6283 pág. 60	7520 pág. 158	7522 pág. 168
------------------	-----------------	------------------	------------------



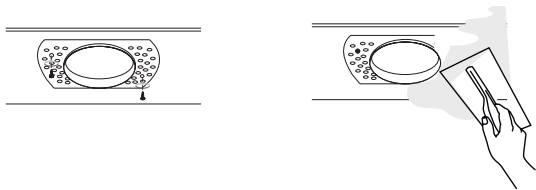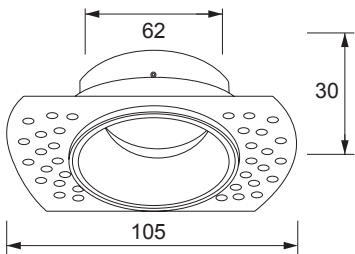



REFERENCE	BULB NO INCLUDED	FINISH
8664	1 × GU10	Blanco-White
8665	1 × GU10	Negro-Black
GU10 máx 12W Led		100-240V~ 50/60Hz Aluminio-Aluminium




Bombillas recomendadas-Suggested bulbs

K	Wat LED	On/Off	Dimmable	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm





2 Opciones de montaje-2 assembly options

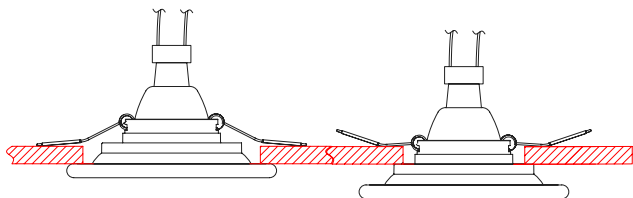

Plano-Flat


Flotación-Float



ø95-100mm


ø60-70mm

REFERENCE	BULB NO INCLUDED	FINISH
8689	1 × GU10	Blanco-White
	GU10 máx 12W Led	100-240V~ 50/60Hz Polycarbonato-Polycarbonate



Bombillas recomendadas-Suggested bulbs

K	Wat LED	On/Off	Dimmable	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm




REFERENCE	BULB NO INCLUDED	FINISH
8688	1 × GU10	Blanco-White
	GU10 máx 12W Led	100-240V~ 50/60Hz Polycarbonato-Polycarbonate




GUINCHO GU10

Empotrable-Recessed

Indoor

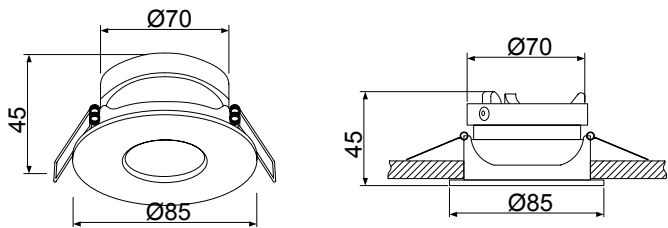

REFERENCE	BULB NO INCLUDED	FINISH
7535	1 × GU10	Blanco arena-Sand white
7536	1 × GU10	Negro arena-Sand black
GU10 máx 10W Led 100-240V~ 50/60Hz Aluminio-Aluminium		



Bombillas recomendadas-Suggested bulbs

K	Wat LED	On/Off	Dimmable	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm



70mm



NOT INCLUDED



garantía mantenido 3 años
WARRANTY 3 YEARS




IP20




BÁSICO GU10

Empotrable-Recessed

Indoor

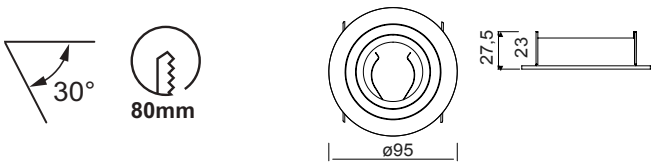

REFERENCE	BULB NO INCLUDED	FINISH
7740	1 × GU10	Nickel Satinado/Cromo-Satin Nickel/Chrome
7741	1 × GU10	Blanco mate-Matt white
7742	1 × GU10	Aluminio Pulido-Polished Aluminium
7743	1 × GU10	Negro mate-Matt black
GU10 máx 12W Led		100-240V~ 50/60Hz Aluminio-Aluminium



Bombillas recomendadas-Suggested bulbs

K	Wat LED	On/Off	Dimmable	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm




BÁSICO GU10


Empotrable-Recessed

Indoor

C0002

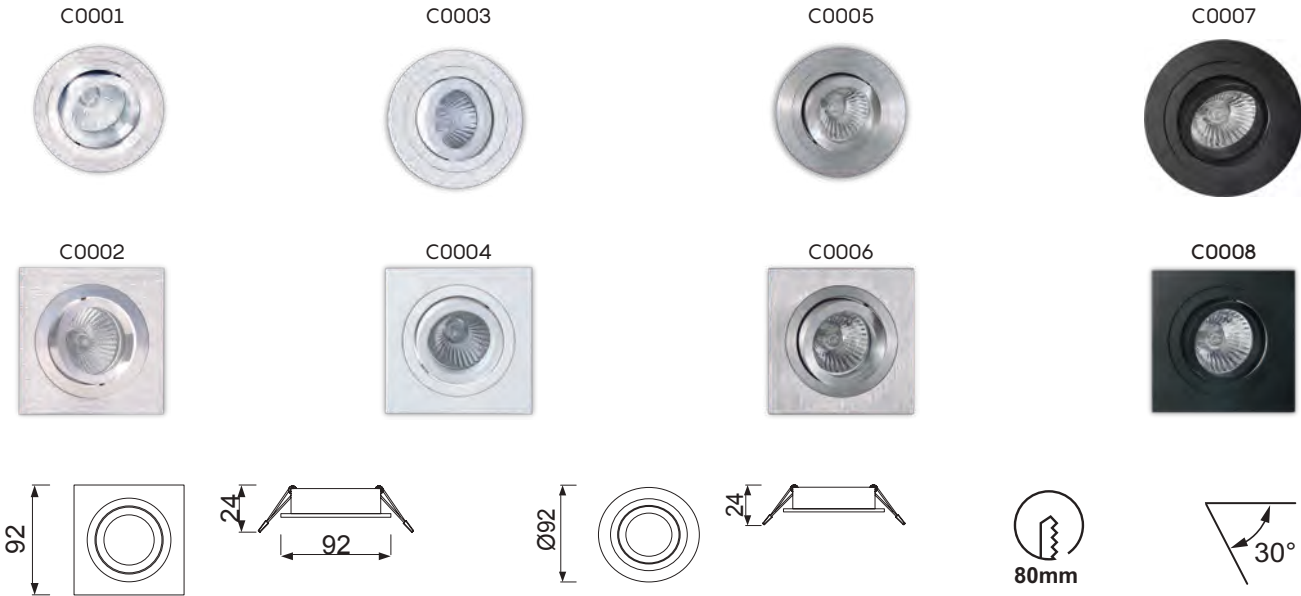

REFERENCE	BULB NO INCLUDED	FINISH
C0001	1 × GU10	Nickel Satinado/Cromo-Satin Nickel/Chrome
C0002	1 × GU10	Nickel Satinado/Cromo-Satin Nickel/Chrome
C0003	1 × GU10	Blanco mate-Matt white
C0004	1 × GU10	Blanco mate-Matt white
C0005	1 × GU10	Aluminio Pulido-Polished Aluminium
C0006	1 × GU10	Aluminio Pulido-Polished Aluminium
C0007	1 × GU10	Negro mate-Matt black
C0008	1 × GU10	Negro mate-Matt black
GU10 máx 12W Led		100-240V~ 50/60Hz Aluminio-Aluminium



Bombillas recomendadas-Suggested bulbs

K	Wat	LED	On/Off	Dimmable	Lumens
2700K	7W		R09254	R09257	510lm
3000K	7W		R09255	R09258	540lm
4000K	7W		R09256	R09259	570lm




COMFORT GU10

Empotrable-Recessed


Indoor



REFERENCE	BULB NO INCLUDED	FINISH
C0160	1 × GU10	Blanco mate-Matt white
C0161	1 × GU10	Plata mate-Matt silver
C0164	1 × GU10	Negro mate-Matt black
GU10 máx 12W Led		100-240V~ 50/60Hz Aluminio-Aluminium




REFERENCE	BULB NO INCLUDED	FINISH
C0162	1 × GU10	Blanco mate-Matt white
C0163	1 × GU10	Plata mate-Matt silver
C0165	1 × GU10	Negro mate-Matt black
GU10 máx 12W Led		100-240V~ 50/60Hz Aluminio-Aluminium




C0160



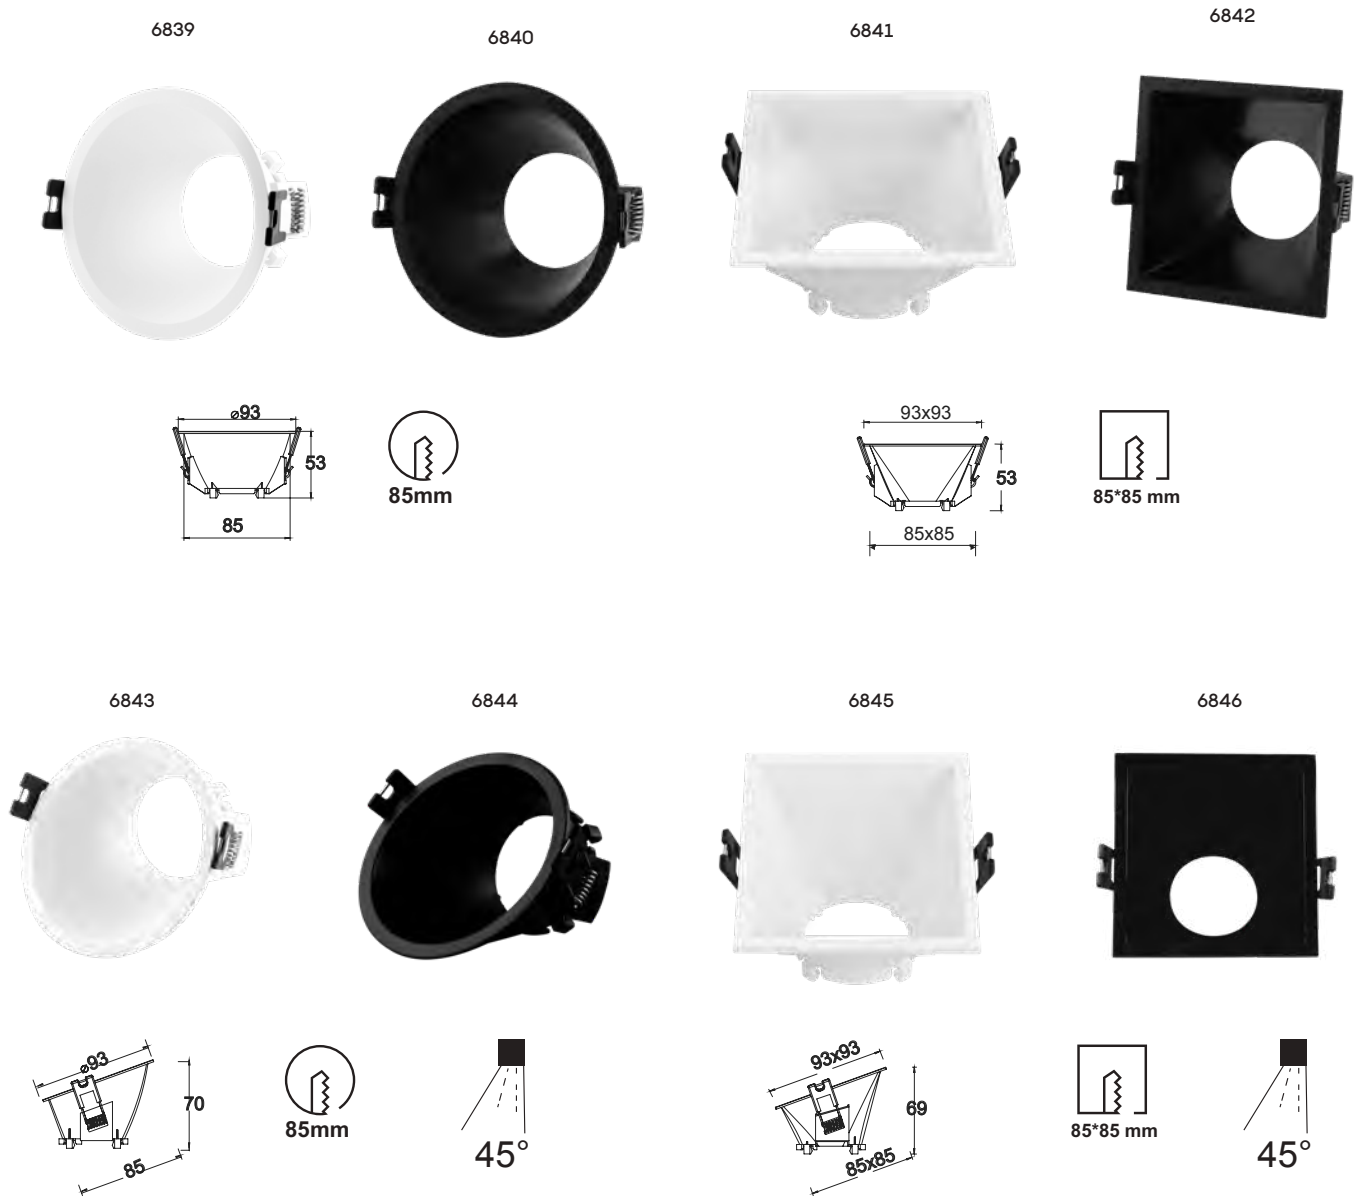


REFERENCE	BULB NO INCLUDED	FINISH
6839	1 × GU10	Blanco mate-Matt white
6840	1 × GU10	Negro mate-Matt black
6843	1 × GU10	Blanco mate-Matt white
6844	1 × GU10	Negro mate-Matt black
6841	1 × GU10	Blanco mate-Matt white
6842	1 × GU10	Negro mate-Matt black
6845	1 × GU10	Blanco mate-Matt white
6846	1 × GU10	Negro mate-Matt black
GU10 máx 12W Led		100-240V~ 50/60Hz PCB by samsung

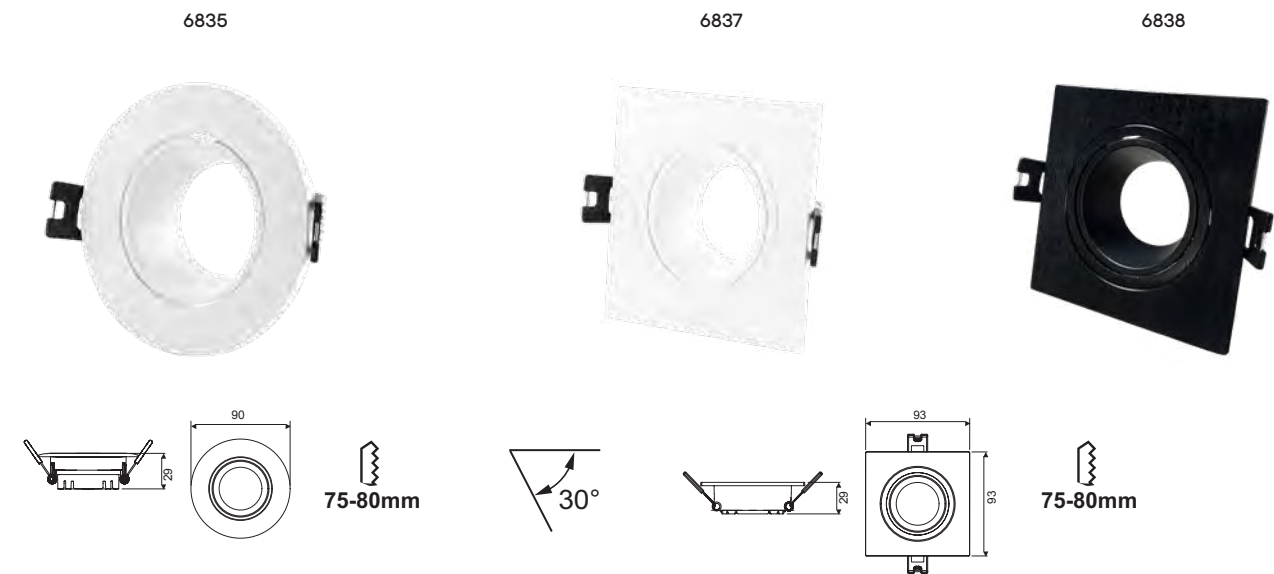



REFERENCE	BULB NO INCLUDED	FINISH
6835	1 × GU10	Blanco mate-Matt white
6837	1 × GU10	Blanco mate-Matt white
6838	1 × GU10	Negro mate-Matt black
GU10 máx 12W Led		100-240V~ 50/60Hz PCB by samsung



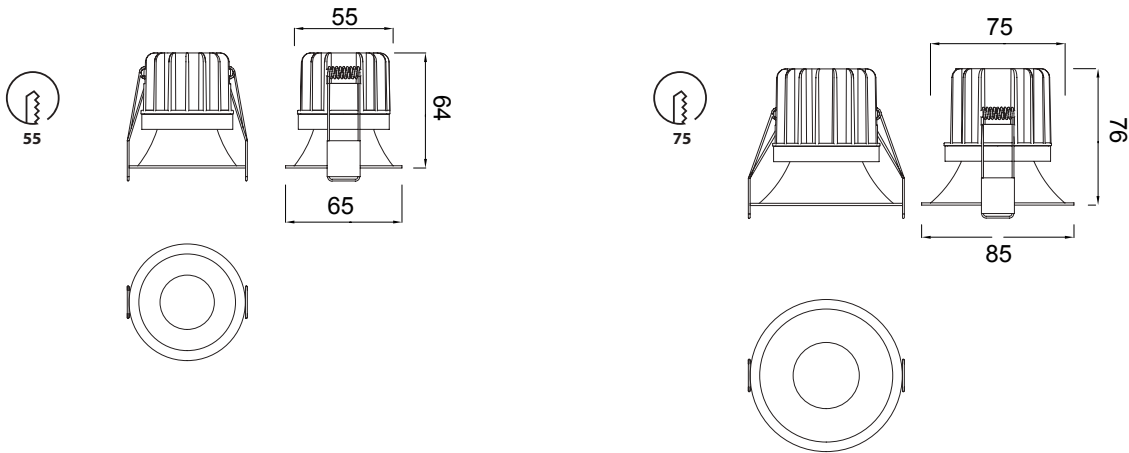



REFERENCE	CCT	LED WATT	LUMENS	FINISH
8764	2700K/3000K/4000K	8W	720lm	Blanco-White
8765	2700K/3000K/4000K	8W	720lm	Negro-Black
8766	2700K/3000K/4000K	12W	1080lm	Blanco-White
8767	2700K/3000K/4000K	12W	1080lm	Negro-Black
200-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium

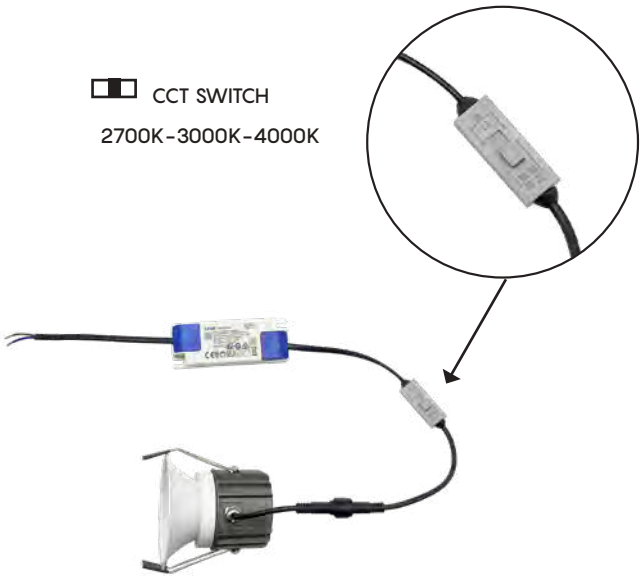

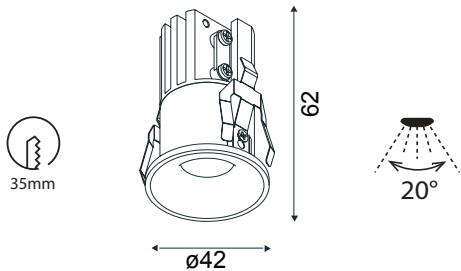

REFERENCE	K	LED WATT	LUMENS	FINISH
8666	2700K	7W	505lm	Blanco arena-Sand white
8669	2700K	7W	505lm	Negro arena-Sand black
8667	3000K	7W	520lm	Blanco arena-Sand white
8670	3000K	7W	520lm	Negro arena-Sand black
8668	4000k	7W	535lm	Blanco arena-Sand white
8671	4000k	7W	535lm	Negro arena-Sand black
200-240V ~ 50/60Hz CRI:≥ 90				Aluminio-Aluminium









REFERENCE	K	LED WATT	LUMENS	FINISH
7080	2700K	3W	210lm	Blanco arena-Sand white
7081	2700K	3W	210lm	Negro arena-Sand black
6855	3000K	3W	210lm	Blanco arena-Sand white
6856	3000K	3W	210lm	Negro arena-Sand black
6859	4000k	3W	210lm	Blanco arena-Sand white
6860	4000k	3W	210lm	Negro arena-Sand black
7082	2700K	5W	410lm	Blanco arena-Sand white
7083	2700K	5W	410lm	Negro arena-Sand black
6857	3000K	5W	410lm	Blanco arena-Sand white
6858	3000K	5W	410lm	Negro arena-Sand black
6861	4000k	5W	410lm	Blanco arena-Sand white
6862	4000k	5W	410lm	Negro arena-Sand black
200-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium





6855-6856

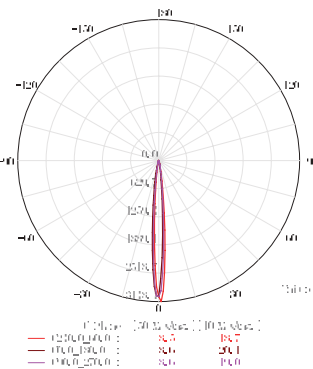



6857-6858

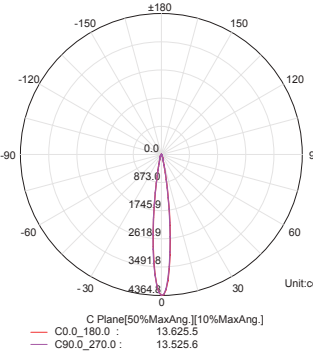

7080-7081





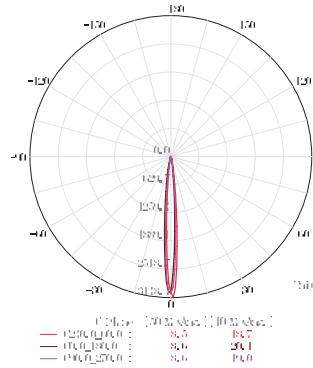




7082-7083

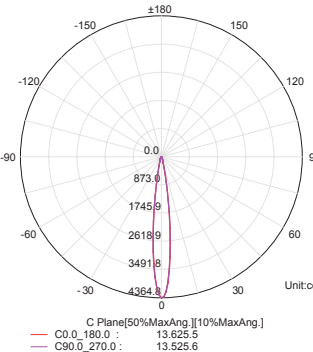




REFERENCE	K	LED WATT	LUMENS	FINISH
C0083	3000K	7W	490lm	Blanco mate-Matt white
C0084	4000K	7W	520lm	Blanco mate-Matt white
220-240V ~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium

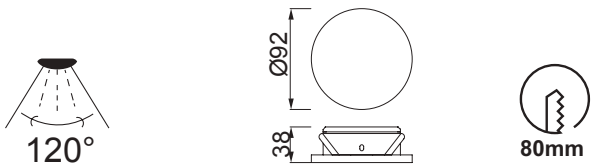

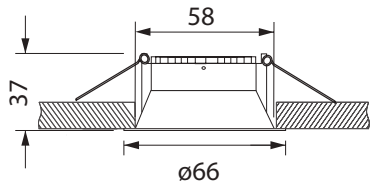



REFERENCE	BULB NO INCLUDED	FINISH
8660	1 × mini GU10	Blanco-White
8661	1 × mini GU10	Negro-Black
GU10 máx 12W Led 100-240V ~ 50/60Hz Aluminio-Aluminium		




Bombillas recomendadas-Suggested bulbs

K	Wat	LED	On/Off	Lumens
2700K	4W		R09280	290lm
3000K	4W		R09281	310lm
4000K	4W		R09282	330m



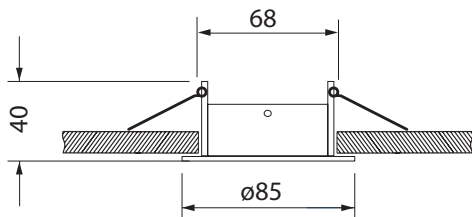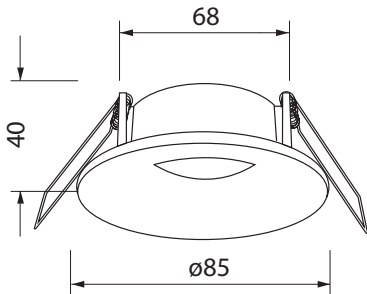

REFERENCE	BULB NO INCLUDED	FINISH
8654	1 × GU10	Blanco-White
8655	1 × GU10	Negro-Black
GU10 máx 12W Led 100-240V ~ 50/60Hz Aluminio-Aluminium		



Bombillas recomendadas-Suggested bulbs



K	Wat LED	On/Off	Dimmable	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm




TAVIRA
New

Empotrable-Recessed

Indoor
IP54

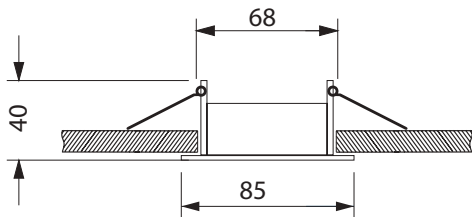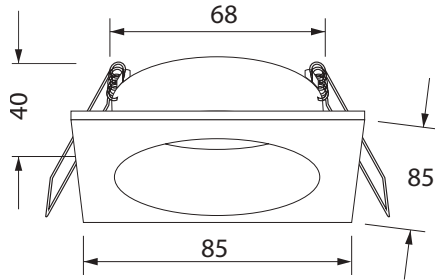

REFERENCE	BULB NO INCLUDED	FINISH
8656	1 × GU10	Blanco-White
8657	1 × GU10	Negro-Black
GU10 máx 12W Led 100-240V ~ 50/60Hz Aluminio-Aluminium		



Bombillas recomendadas-Suggested bulbs

K	Wat LED	On/Off	Dimmable	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm



68mm



NOT INCLUDED




garantía mantenido 3 años
WARRANTY 3 YEARS
GARANTIA 3 AÑOS




IP54






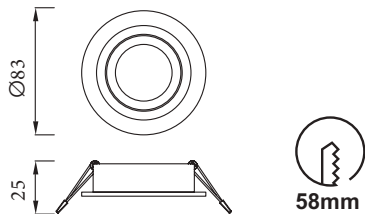


REFERENCE	BULB NO INCLUDED	FINISH
6405	1 × GU10	Blanco mate-Matt white
6406	1 × GU10	Aluminio Plata-Silver Aluminium
GU10 máx 12W Led 100-240V~ 50/60Hz Aluminio-Aluminium		



Bombillas recomendadas-Suggested bulbs

K	Wat	LED	On/Off	Dimmable	Lumens
2700K	7W		R09254	R09257	510lm
3000K	7W		R09255	R09258	540lm
4000K	7W		R09256	R09259	570lm

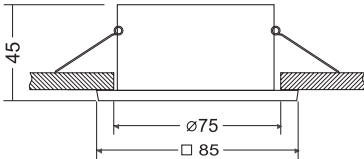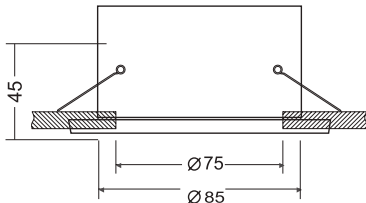


REFERENCE	BULB NO INCLUDED	FINISH	SIZES
6810	1 × GU10	Blanco mate-Matt white	ø 8.5×4.5cm
6811	1 × GU10	Negro mate-Matt black	ø 8.5×4.5cm
6812	1 × GU10	Blanco mate-Matt white	4.5×8.5×8.5cm
6813	1 × GU10	Negro mate-Matt black	4.5×8.5×8.5cm
GU10 máx 12W Led 100-240V~ 50/60Hz Aluminio-Aluminium			



Tiras Led Strip Leds

TIRAS-STRIPS

Tira LED flexible para uso interior IP20
IP20 Flexible LED strip for indoor lighting

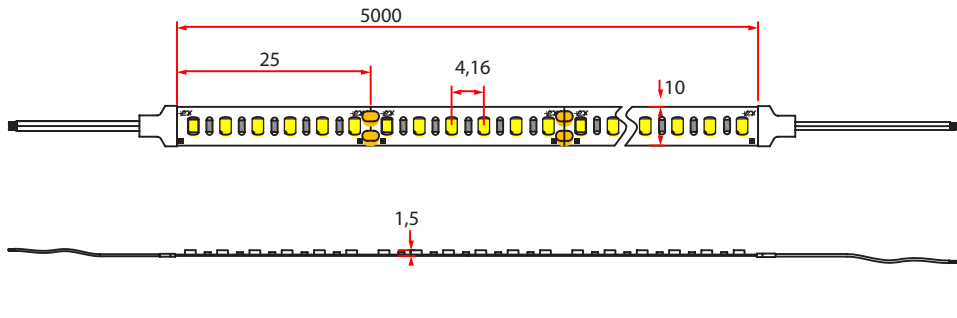


Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
7366	●	2700	24	240	19,2	1594	83	≥ 90	< 3	10	25	6	5	20
7367	●	3000	24	240	19,2	1651	86	≥ 90	< 3	10	25	6	5	20
7368	○	4000	24	240	19,2	1709	89	≥ 90	< 3	10	25	6	5	20

TIRAS-STRIPS

Tira LED flexible para uso interior. IP20
IP20 Flexible LED strip for indoor use

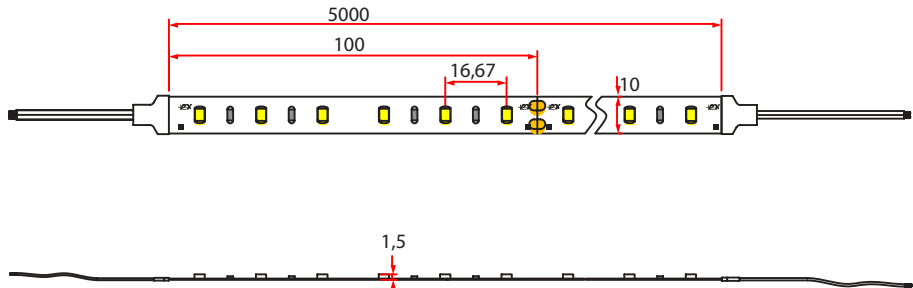

Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
7360	●	2700	24	60	9,6	730	76	≥ 90	< 3	10	100	6	5	20
7361	●	3000	24	60	9,6	759	79	≥ 90	< 3	10	100	6	5	20
7362	○	4000	24	60	9,6	787	82	≥ 90	< 3	10	100	6	5	20

CONSULTAR



24V CRI:≥ 90 tc<65°




24V CRI:≥ 90 tc<65°

TIRAS – STRIPS

Tira LED flexible para uso interior. IP20
IP20 Flexible LED strip for indoor use


Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
7363		2700	24	120	14,4	1051	73	≥ 90	< 3	8	50	6	5	20
7364		3000	24	120	14,4	1109	77	≥ 90	< 3	8	50	6	5	20
7365		4000	24	120	14,4	1152	80	≥ 90	< 3	8	50	6	5	20

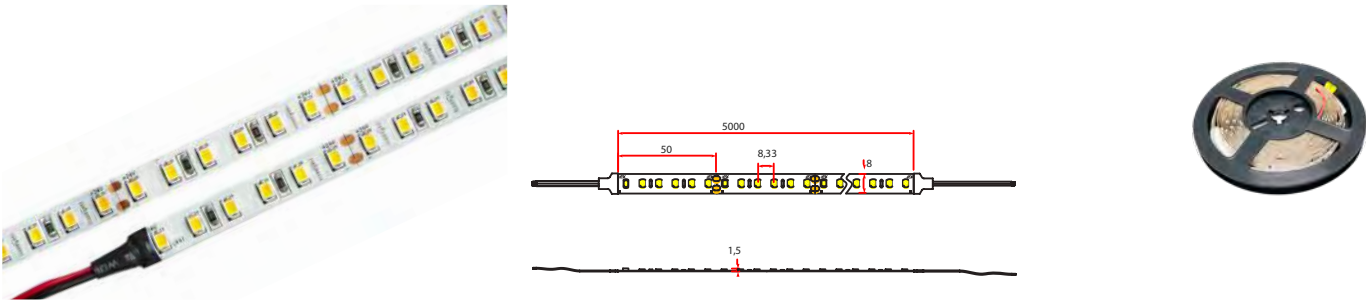

Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
New 8649		3000	24	240	14,4	2448	170	≥ 80	< 3	10	33	8	5	20
New 8650		4000	24	240	14,4	2491	173	≥ 80	< 3	10	33	8	5	20

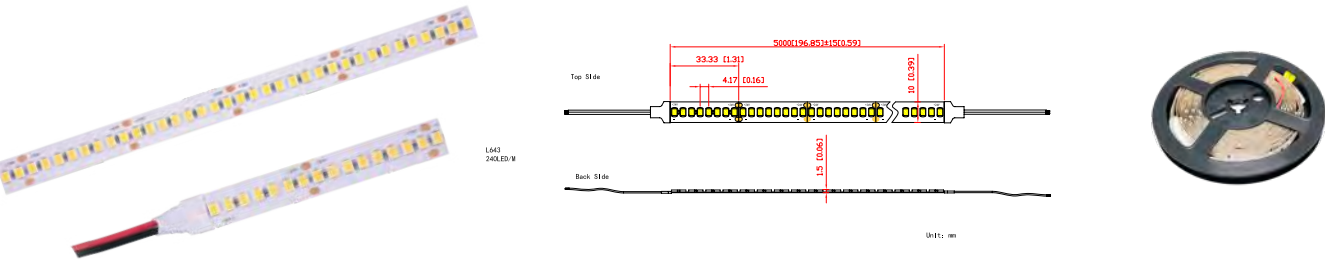

24V CRI:≥ 90 tc<65°

Indoor

TIRAS – STRIPS

Tira LED flexible para uso exterior IP65
IP65 Flexible LED strip for outdoor lighting



Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
7369		3000	24	120	14,4	1109	77	≥ 90	< 3	10	50	6	5	65
7370		4000	24	120	14,4	1152	80	≥ 90	< 3	10	50	6	5	65

Accesorios de corte IP no incluidos / IP Cutting accessories not included



7406 Conexión estanca DC/Waterproof connection 7404 Pegamento silicona/Silicone glue 7403 Final silicona con agujeros/Silicone end cap w/holes
7405 Final silicona/Silicone End cap



24V CRI:≥ 90 tc<65°



PERFILES – PROFILES

Perfil para tiras LED
Profile for LED strips


Indoor




7381 Blanco-White	7382 Negro-Black	7383 Aluminio-Aluminium
Piezas incluidas/Included pieces	Piezas incluidas/Included pieces	Piezas incluidas/Included pieces
2 m 	2 m 	2 m 
Perfil+difusor/Profile+diffuser	Perfil+difusor/Profile+diffuser	Perfil+difusor/Profile+diffuser
2 × 7384 	2 × 7385 	2 × 7386 
2 × 7387 	2 × 7388 	2 × 7389 
4 × 7391 	4 × 7391 	4 × 7390 

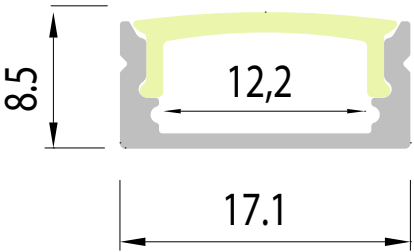

Tapa/End cap



Clip PC transparent




Clip aluminium




Aluminio+PCB/Aluminium+PCB

PERFILES – PROFILES


Perfil para tiras LED
Profile for LED strips

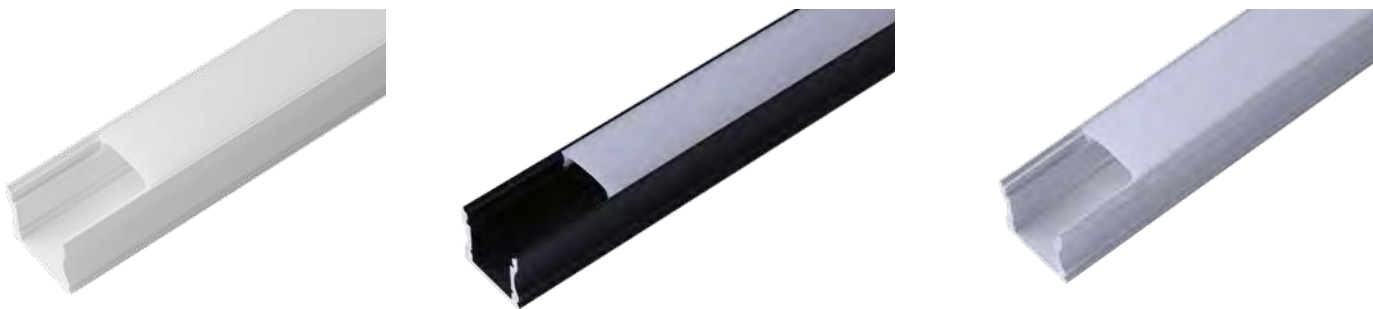


7392 Blanco-White	7393 Negro-Black	7394 Aluminio-Aluminium
Piezas incluidas/Included pieces	Piezas incluidas/Included pieces	Piezas incluidas/Included pieces
2 m 	2 m 	2 m 
Perfil+difusor/Profile+diffuser	Perfil+difusor/Profile+diffuser	Perfil+difusor/Profile+diffuser
2 × 7395 	2 × 7396 	2 × 7397 
2 × 7398 	2 × 7399 	2 × 7400 
4 × 7402 	4 × 7402 	4 × 7401 




Tapa/End cap



Clip PC transparent



Clip aluminium

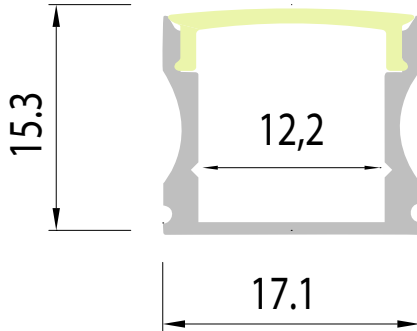

Aluminio+PCB/Aluminium+PCB

PERFILES - PROFILES


Perfil empotrado para suelo
LED Strip Profile recessed in ground



8064 Aluminio-Aluminium

Piezas incluidas/Included pieces

2 m	
Perfil+difusor/Profile+diffuser	
2 x 8065	
2 x 8066	

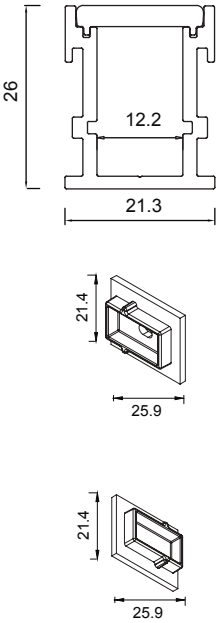

Aluminio+PCB/Aluminium+PCB

Indoor

PERFILES - PROFILES

Perfil para esquinas
Profiles for corners




7417 Blanco-White

7418 Negro-Black

Piezas incluidas/Included pieces

Piezas incluidas/Included pieces

2 m		2 m	
Perfil+difusor/Profile+diffuser		Perfil+difusor/Profile+diffuser	
2 x 8060		2 x 8061	
2 x 8062		2 x 8063	
4 x 7419		4 x 7419	


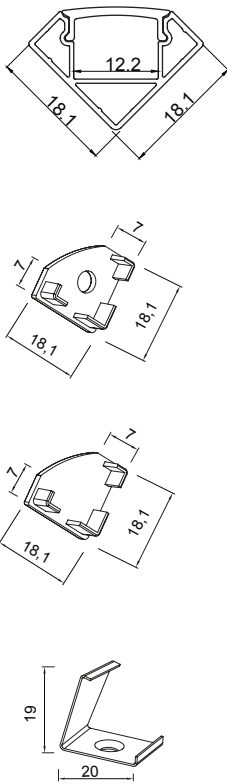


Aluminio+PCB/Aluminium+PCB

PERFILES – PROFILES

Perfil empotrable para tiras led
Recessed profile for led strips

Indoor

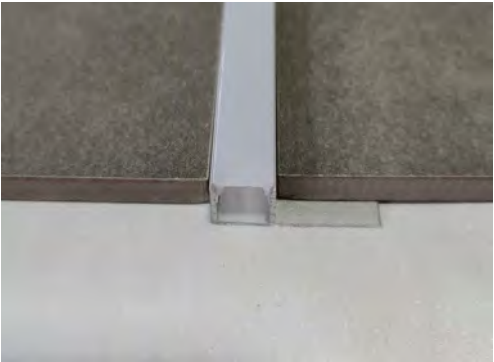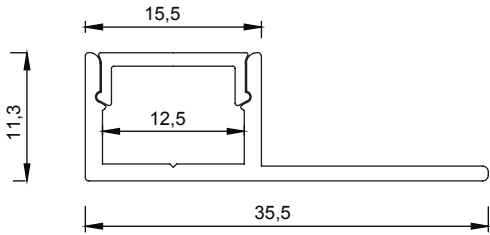


8067 Aluminio-Aluminium

Piezas incluidas/Included pieces

2 m




Perfil+difusor/Profile+diffuser

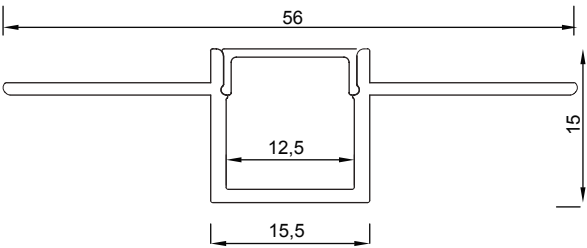

8070 Aluminio-Aluminium

Piezas incluidas/Included pieces

2 m





Perfil+difusor/Profile+diffuser

2 x 8071




2 x 8072



PERFILES-PROFILES

Perfiles Empotrables para tiras LED
Recessed Profile for LED strips

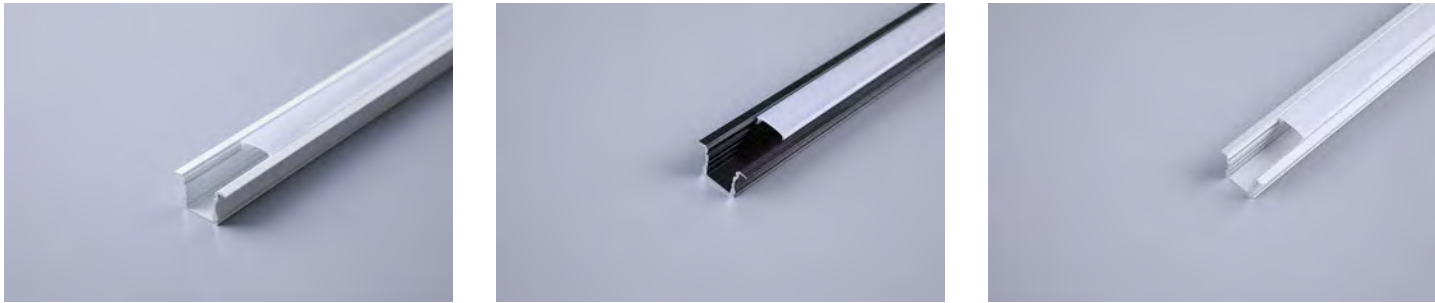

7407 Blanco-White	7408 Negro-Black	7409 Aluminio-Aluminium
Piezas incluidas/Included pieces	Piezas incluidas/Included pieces	Piezas incluidas/Included pieces
2 m 	2 m 	2 m
Perfil+difusor/Profile+diffuser	Perfil+difusor/Profile+diffuser	Perfil+difusor/Profile+diffuser
2 x 7410 	2 x 7411 	2 x 7412
2 x 7413 	2 x 7414 	2 x 7415
4 x 7416 	4 x 7416 	4 x 7416




Aluminio+PCB/Aluminium+PCB

Indoor

ALIMENTADORES-DRIVERS

Tension constante 24v IP67
IP67 24v Constant voltage

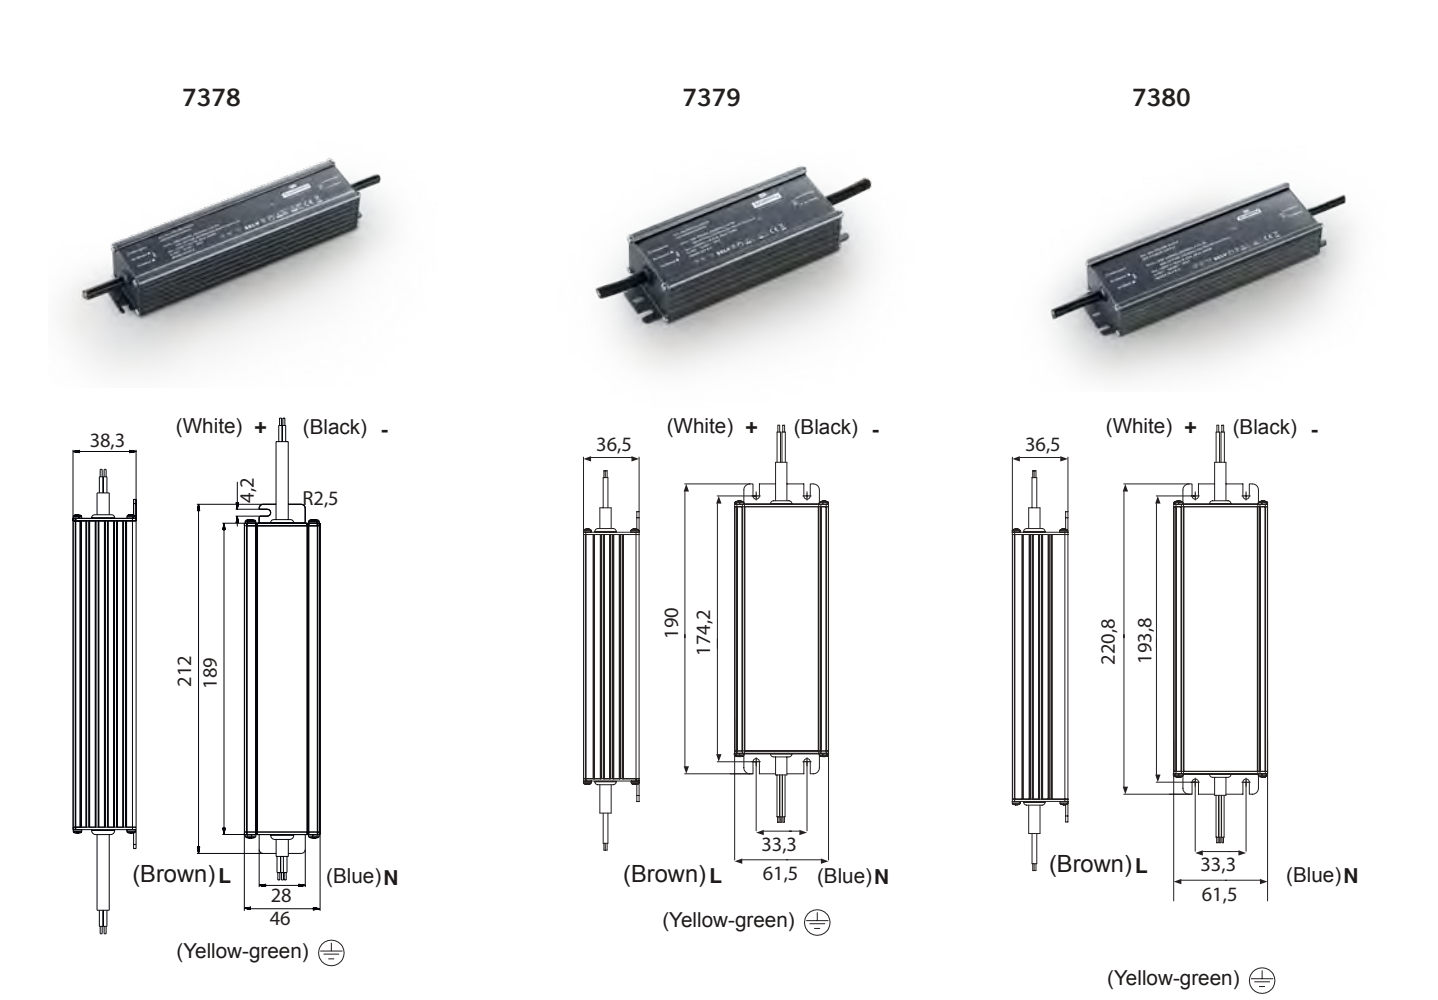

Características técnicas / Technical characteristics


Ref.	Art.-No	Tensión nominal de entrada Nominal input voltage	Rango de potencia en módulo Output power range	Tensión de salida DC Output voltage DC	Corriente de salida máxima Maximum output current	Factor de potencia Power factor	Frecuencia Frequency	Temp. máx. envolvente Max temp.at tc point	Temp. funcionamiento Operating temp.	Protección Protection
		Vac	W	Vdc	A	λ	Hz	tc (°C)	ta (°C)	IP
7378	SPE100-24VLP	200-240V	0-100	24	4.17	≥ 0,95	50/60	90°	-20...+60°	67
7379	SPE150-24VLP	200-240V	0-150	24	6.25	≥ 0,95	50/60	90°	-20...+60°	67
7380	SPE200-24VLP	200-240V	0-200	24	8.33	≥ 0,95	50/60	90°	-20...+60°	67



ALIMENTADORES-DRIVERS


Tension constante 24v
24v Constant voltage

Indoor

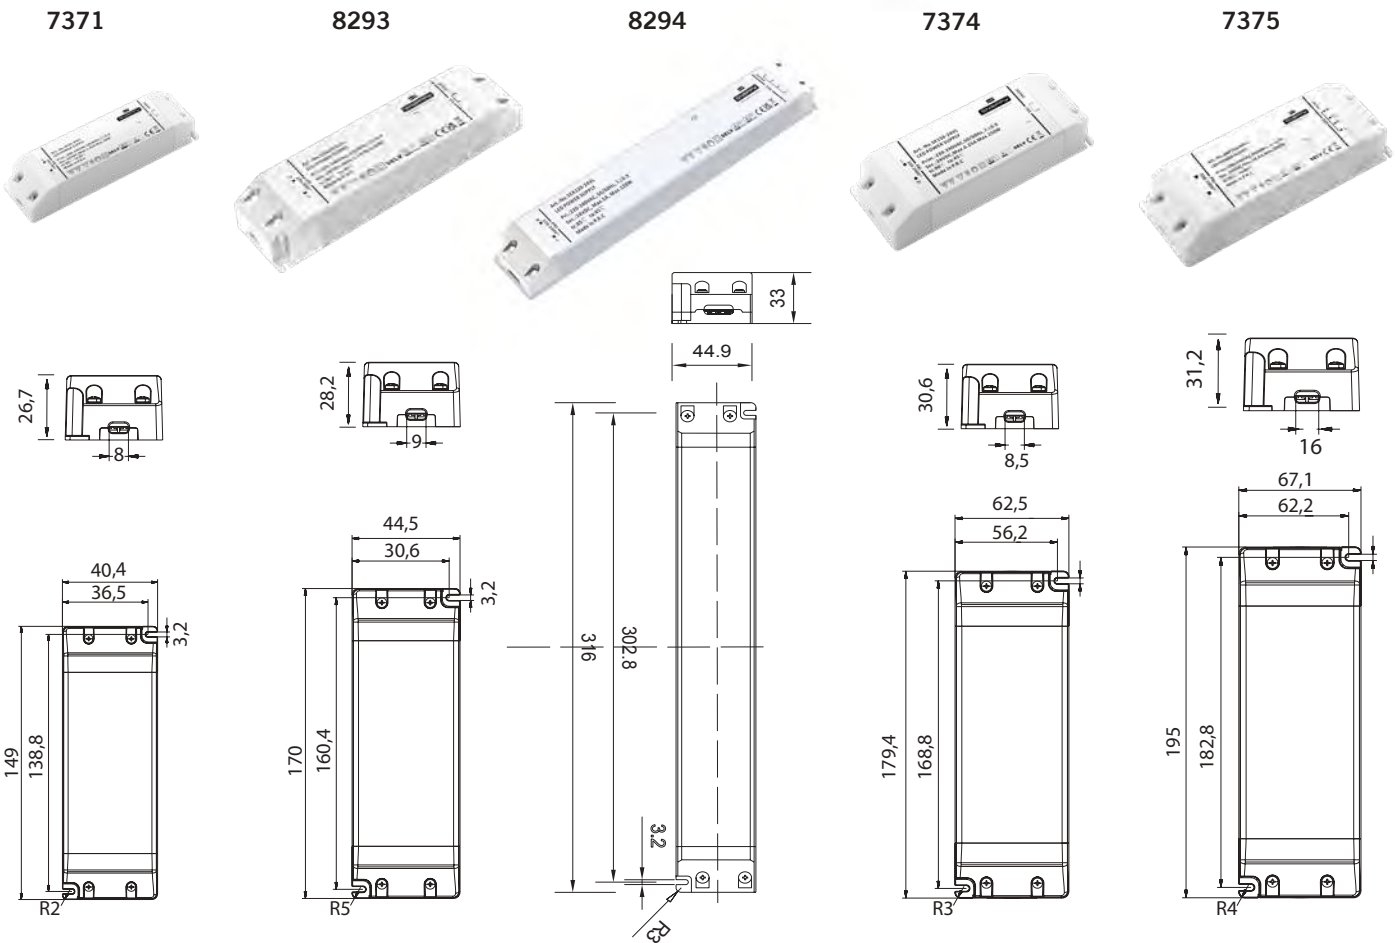

ALIMENTADORES-DRIVERS

Tension constante 24v finos
24v Constant voltage slim

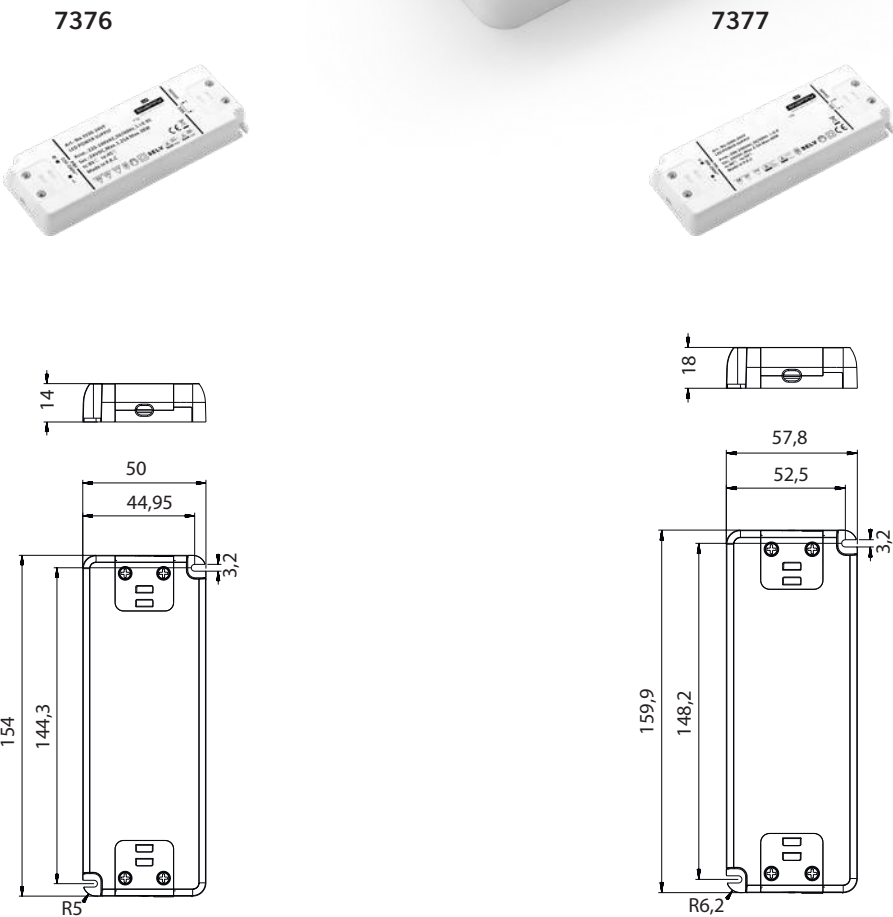

Características técnicas / Technical characteristics

Ref.	Art.-No	Tensión nominal de entrada	Rango de potencia en módulo	Tensión de salida DC	Corriente de salida máxima	Factor de potencia	Frecuencia	Temp. máx. envolvente	Temp. funcionamiento	Protección
		Nominal input voltage	Output power range	Output voltage DC	Maximum output current	Power factor	Frequency	Max temp.at tc point	Operating temp.	Protection
		Vac	W	Vdc	A	λ	Hz	tc (°C)	ta (°C)	IP
7371	SE30-24VL	200-240V	0-30	24	1.25	≥ 0,9	50/60	80°	-20...+45°	20
New 8293	SEA60-24VL	220-240V	0-60	24	2.5	≥ 0,9	50/60	90°	-20...+45°	20
New 8294	SEA120-24VL	220-240V	0-120	24	5	≥ 0,9	50/60	90°	-20...+45°	20
7374	SE150-24VL	220-240V	0-150	24	6.25	≥ 0,9	50/60	90°	-20...+45°	20
7375	SNP250-24VL	200-240V	0-250	24	10.4	≥ 0,95	50/60	90°	-20...+45°	20

Características técnicas / Technical characteristics

Ref.	Art.-No	Tensión nominal de entrada	Rango de potencia en módulo	Tensión de salida DC	Corriente de salida máxima	Factor de potencia	Frecuencia	Temp. máx. envolvente	Temp. funcionamiento	Protección
		Nominal input voltage	Output power range	Output voltage DC	Maximum output current	Power factor	Frequency	Max temp.at tc point	Operating temp.	Protection
		Vac	W	Vdc	A	λ	Hz	tc (°C)	ta (°C)	IP
7376	SS30-24VF	220-240V	0-30	24	1.25	≥ 0,95	50/60	85°	-20...+45°	20
7377	SS60-24VF	200-240V	0-60	24	2.5	≥ 0,9	50/60	80°	-20...+50°	20




SISTEMAS CONTROL-CONTROL SYSTEMS

Controlador LED DIM-TW
DIM-TW LED Controller



El controlador PRO-DIMTW-C01 permite controlar la iluminación de una tira LED monocolor o de Blanco Dinámico (TW) desde un mando a distancia.

El controlador puede ser sincronizado con hasta 8 mandos a distancia simultáneamente. Cada mando a distancia puede controlar hasta 4 controladores diferentes de manera autónoma

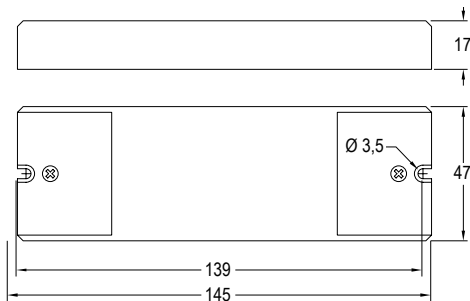

PRO-DIMTW-C01

PRO-DIMTW-C01 can control single colour (1CH) or Tunable White (2CH) LED Strips from an RF remote control.

The controller could be linked with up to 8 remotes at the same time. Each remote can control 4 controllers independently.

Accesorios / Accessories


Ref 9955911 PRO-DIM-R01



Esquema de conexión / Connection diagram

Ref.	Tensiones de entrada y salida Input-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output powewr	Tipo tira Led Led strip type	Control a través de Control made by
	V	mA	A	12V 24V		Mando a distancia RF
9955912	12-24	PWM	3 x 5A DIM 2x 5A TW	60W CH 120 W CH	Monocolor (1CH-DIM) TW (2CH)	RF Remote control

Modos de control y funcionamiento / Functions and control modes

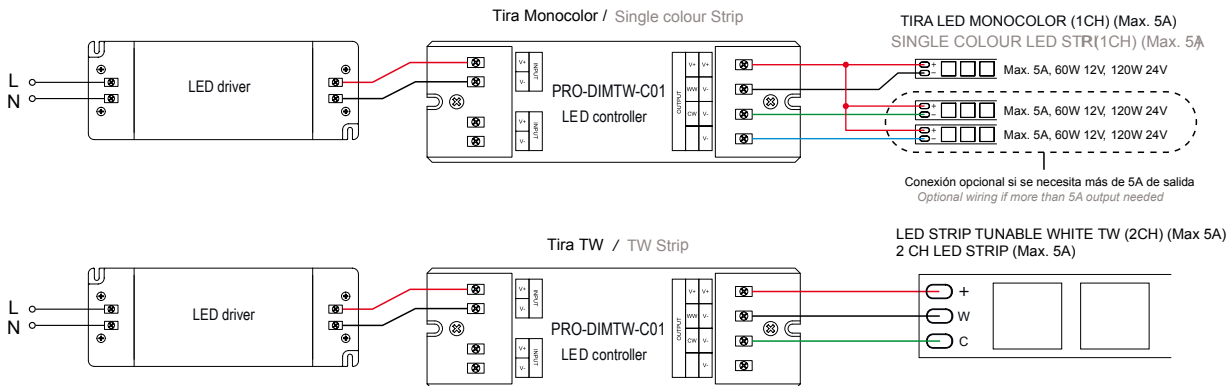

SISTEMAS CONTROL-CONTROL SYSTEMS

Mando a distancia DIM Monocolor
DIM Single Colour remote control



El mando PRO-DIM-R01 puede controlar hasta un máximo de 20 receptores.

Permite regular la intensidad de la luz.

Permite controlar hasta 4 zonas independientes.

Cada zona puede ser de uno o más controladores

Permite programar 2 escenas en memoria.


The PRO-DIM-R01 remote control can control a maximum of 20 receivers.

Allows regulation of lighting intensity.

Can control up to 4 independent zones.

Each zone can be with one or more controllers.

Can program 2 saving scenes.

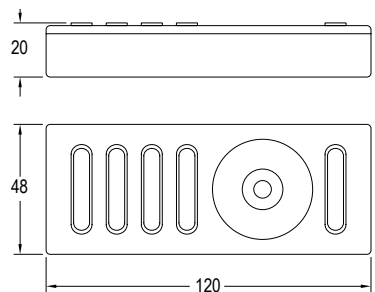


Accesorios / Accessories

Ref 9955912 PRO-DIMTW-C01




Características técnicas / Technical characteristics

Ref.	Alimentación Power	Frecuencia de operación Operation frequency	Tipo de tira LED LED strip type	Alcance máx. interior (Sin paredes) Max. Range (Without walls)	Compatible con Compatible with
		Mhz		m	
9955911	3xAAA/LR03 1,5V batteries/ pilas	434/869	TW (2CH) DIM / monocolor (1CH)	20	SPU-DIM-C01

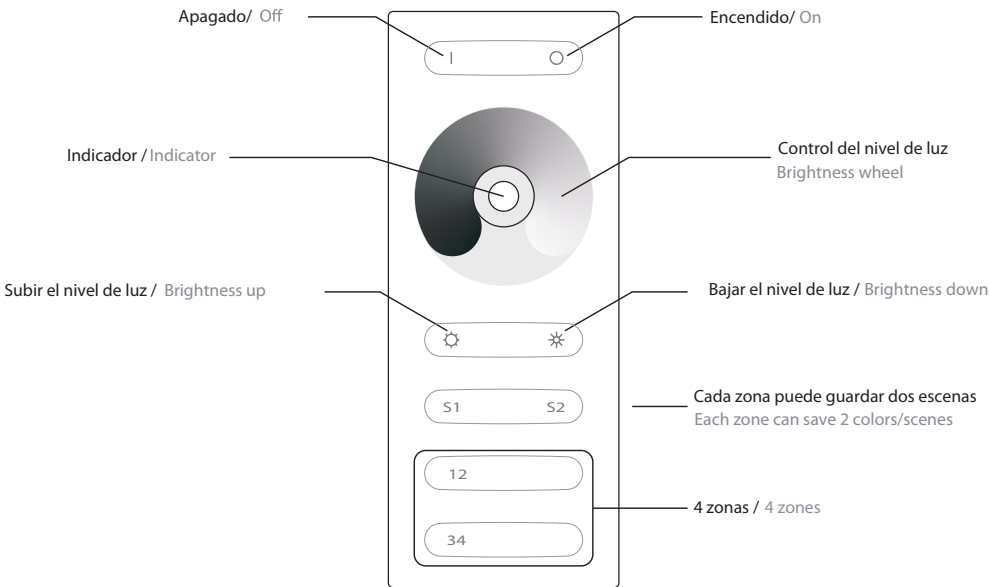

Controlador LED para pulsadores estándar y/o mando a distancia

LED Controller for standard push switch and/or remote control

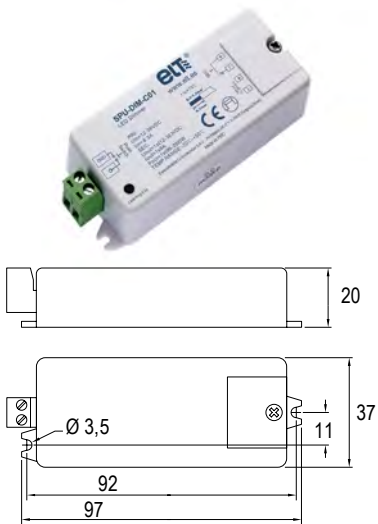

El controlador SPU-DIM-C01 permite controlar la iluminación de una tira LED monocolor desde un pulsador estándar de cualquier fabricante. Pueden controlarse las tiras LED manteniendo la misma familia de mecanismos que en el resto de la instalación en la que se integre.

También puede controlarse con los mecanismos RF SPU. Son mecanismos sin cables de instalación muy sencilla, pegar o atornillar y que funcionan con pila de 3 años de duración. Permite controlar los LEDs fijando el mecanismo en cualquier superficie.

El controlador puede ser gobernado por varios pulsadores (ver esquema de conexión) y hasta 8 mecanismos RF SPU a la vez. Puede funcionar con los dos sistemas de control de manera simultánea (pulsador conectado por cable y mecanismos RF) o sólo con uno de ellos.

STO-DIM-C01 can control single colour LED strips from a standard push switch from any manufacturer. LED strips can be controlled keeping the same kind of switches as the rest of the installation.





It can also be controlled with the RF SPU switches. These switches are wireless, work with a 3-year-life battery and are very easy to install: just screw or stick in any surface.

Controller can be managed by several push switches (see wiring diagram) and up to 8 RF SPU switches at the same time. It can work with two control systems (standard switches or RF switches) simultaneously or only with one of them.

Características técnicas / Technical characteristics

Ref.	Tensiones de entrada y salida Input-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output powewr	Tipo tira Led Led strip type	Control a través de Control made by
	V	mA	A	12V 24V 36V		Pulsador standard y/o mecanismo RF
9955901	12-24-36	PWM	1x8	96 W 192 W 288 W	MONOC. DIM (1CH)	Standard push switch and/or RF Switch

Modos de control y funcionamiento / Functions and control modes

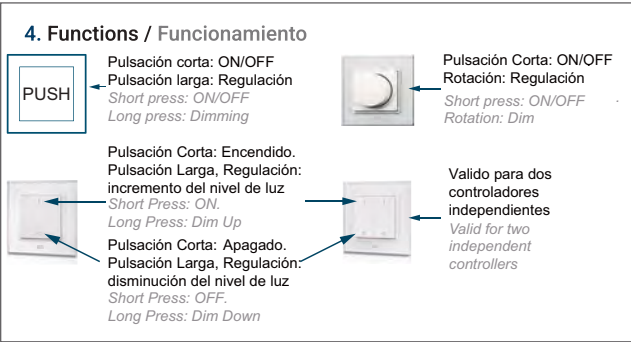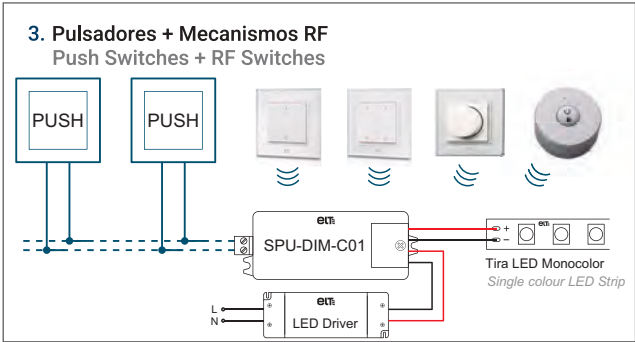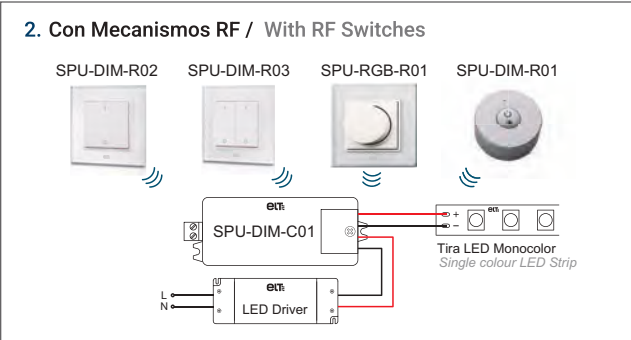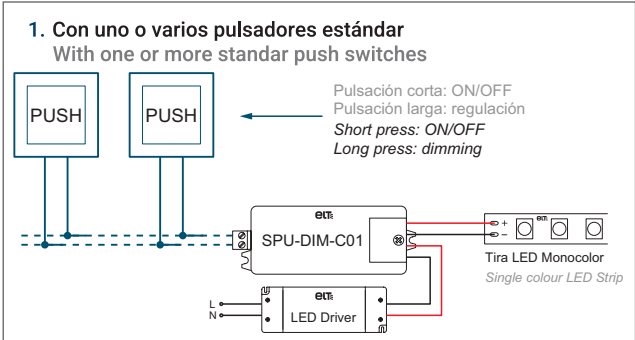

Mecanismo RF

RF Switch PUSH SYSTEM




Mecanismo RF pequeño y versátil que permite encender, apagar y regular una instalación de tira LED monocolor.

Puede ser fijado a una pared mediante tornillos o pegado (cinta de doble cara incluida). También lleva un imán para fijarse con facilidad en superficies metálicas.

Su reducido tamaño permite que pueda ser llevado en un bolsillo como mando a distancia. Está alimentado por una pila de tipo CR2025 de larga duración.

Fijación: Tornillos / iman.

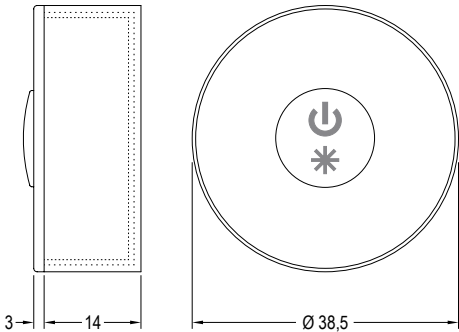

Small and versatile RF switch which allows to swithc ON/OFF and dim a single colour LED strip.

Can be easily fixed to a wall with screws or sticked (double side tape included). Also comes with a small magnet to be fixed easily on metalic surfaces.

Its small size allows to take it in a pocket as a remote control. It 's powered with a long life CR2025 battery.

Fixing: Screw / magnet.

Controlador compatible /
Controller compatible with


Ref 9955901 SPU-DIM-C01



Características técnicas / Technical characteristics

Ref.	Alimentación Power	Frecuencia de operación Operation frequency	Tipo de tira LED LED strip type	Alcance máx. interior (Sin paredes) Max. Range (Without walls)	Compatible con Compatible with
		Mhz		m	
9955905	CR2025 3V battery / pila	434/869	DIM (1CH)	30	SPU-DIM-C01

Características técnicas / Technical characteristics

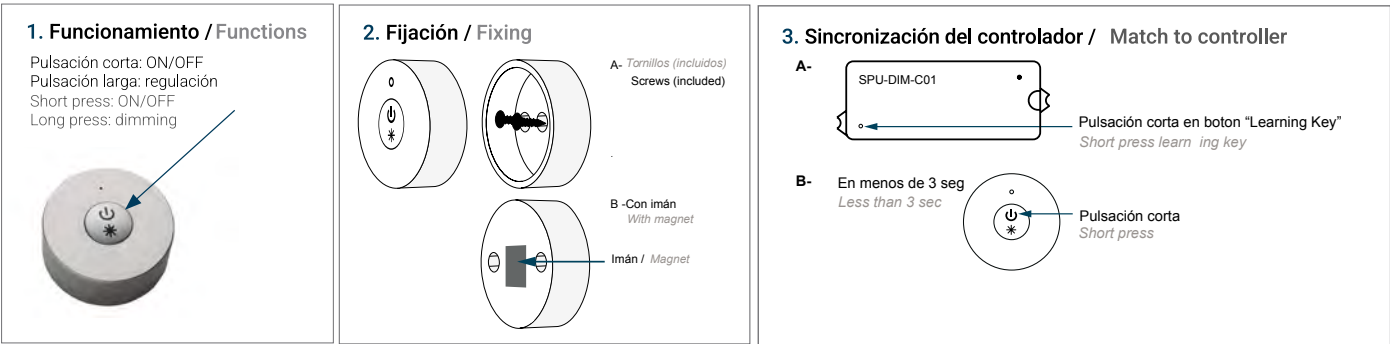


SISTEMAS CONTROL-CONTROL SYSTEMS

Digital dimmer, 1 dirección digital, 4 canales
Digital dimmer, 1 digital address, 4 channels

DAL-MULTI-C02

12-36V DC

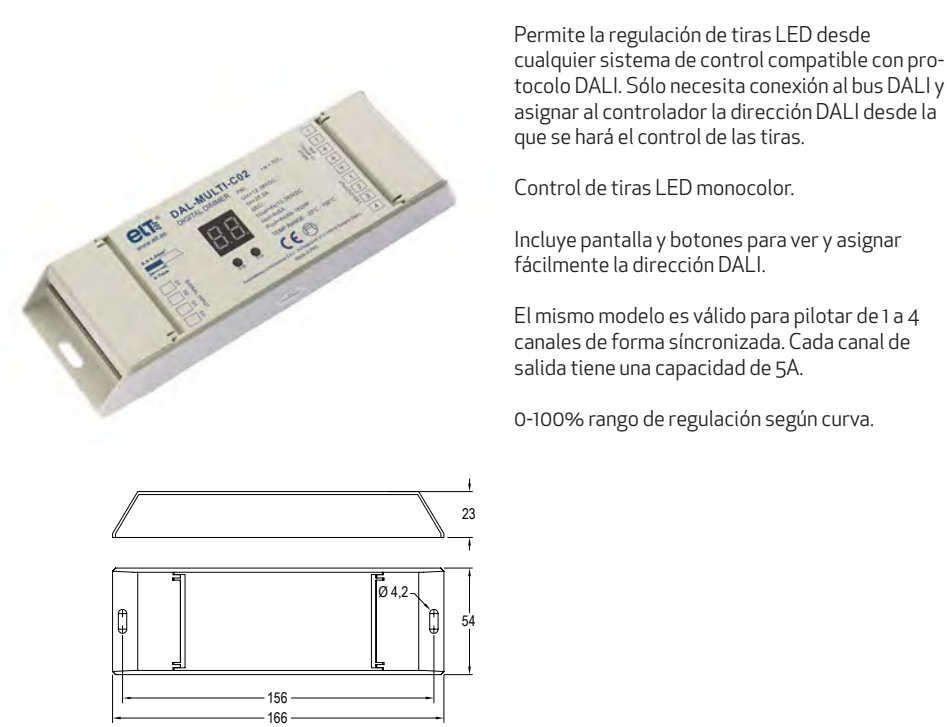

Permite la regulación de tiras LED desde cualquier sistema de control compatible con protocolo DALI. Sólo necesita conexión al bus DALI y asignar al controlador la dirección DALI desde la que se hará el control de las tiras.

Control de tiras LED monocolor.

Incluye pantalla y botones para ver y asignar fácilmente la dirección DALI.

El mismo modelo es válido para pilotar de 1 a 4 canales de forma sincronizada. Cada canal de salida tiene una capacidad de 5A.

0-100% rango de regulación según curva.

This device allows to control LED strips from any control system compatible with DALI protocol. Only needs a connexion to the DALI bus and assign the device the DALI address to control the strips.

Control of LED single colour strips.

Includes screen and buttons to see and assign easily the DALI address.


The same model works from 1 to 4 channel synchronously. Each channel has a current output of 5A

0-100% dimming range via logarithmic curve.

Características técnicas / Technical characteristics


Ref.	Tensiones de entrada y salida Input-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output powewr	Tipo tira Led Led strip type	Control a través de Tipo Control made by
	Vdc	mA	A	12V 24V 36V		
9955921	12-24-36	PWM	4 ch x 5A	240 W 480 W 720 W (4 x 60) (4 x 120) (4 x 180)	DIM	DALI

Esquema de conexión / Connection diagram

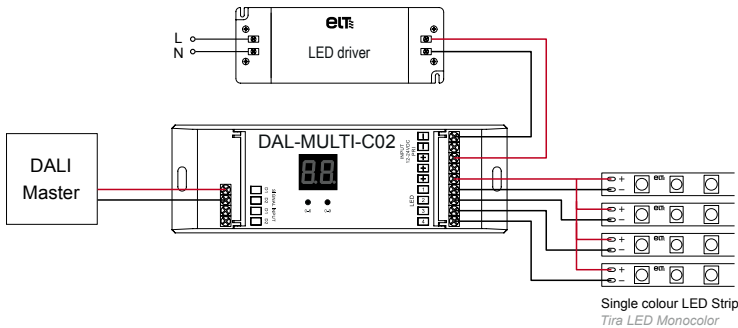

SISTEMAS CONTROL-CONTROL SYSTEMS

Controlador LED para pulsadores estándar y/o mando a distancia
LED Controller for standard push switch and/or remote control

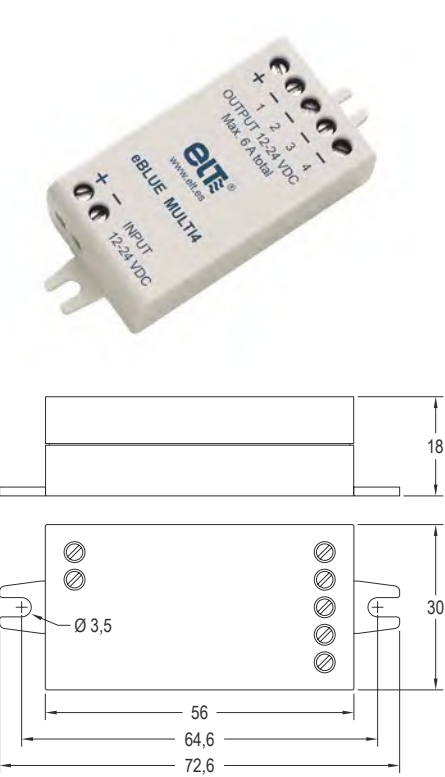

eBLUE MULTI4 es un regulador PWM de cuatro canales controlable por Bluetooth para cargas LED de tensión constante, tales como tiras y módulos LED de tensión constante.

eBLUE MULTI4 puede controlar hasta cuatro canales. La corriente de salida máxima es 6A, la cual puede ser dividida libremente entre 1-4 canales.

Dimensiones muy reducidas para su instalación.

Protegido contra sobrevoltages, sobre corriente y cortocircuitos.

Controlable de forma inalámbrica a través de un dispositivo inteligente (smartphones / tablets.) Visual e intuitiva app para smartphones / tablets. Disponible gratuitamente en Apple Store / Google Play. app CASAMBI

Forma automáticamente una rápida y segura red inalámbrica de malla con otras unidades eBLUE (hasta 127 unid / red).

Permite una programación horaria de escenas. Servicio en la nube.

El firmware del dispositivo puede ser actualizado en funcionamiento de manera inalámbrica. Sección máxima en clemas 0,75-1,5 mm2.

BLUE MULTI4 is a Bluetooth controllable four channel PWM dimmer for constant voltage LED loads, such as LED strips and constant voltage LED modules.

eBLUE MULTI4 can control up to four channels. The maximum combined output current 6A which can be freely divided between 1-4 CH.

Very small size for easy installation.

Protected against overvoltage, overcurrent and short circuit situations.

Wirelessly controllably with a smart device (smartphone, tablet.) Intuitive and visual app for smartphones / tablets. Available for free on Apple Store / Google Play. CASAMBI

Forms automatically a fast and secure wireless mesh network with other eBLUE devices (up to 127 units / network).


Use timers to turn on and off scene at predefined times.

Cloud service that enhances user experience. Device firmware can be updated over the air. Max terminal section 0.75-1.5 mm2

Características técnicas / Technical characteristics

Ref.	Tensiones de entrada y salida Input-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output powewr	Temp. máx. envolvente Max. temp at tc point	Temp. funcionamiento Operatin temp.	Control a través de Tipo Control made by
	Vdc	mA	A	12V 24V	tc (°)	ta (°)	
9953074	12-24	PWM	6	72 W 144 W	+75	-20...+45	DIM, TW, RGB, RGBW

Esquema de conexión / Connection diagram

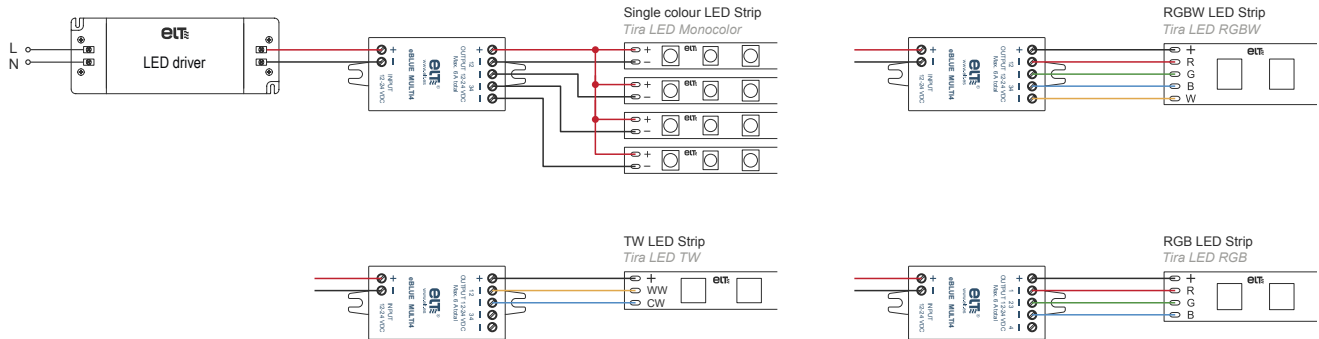


A diagram of a cable with a length of 5000 mm. The cable is represented by a horizontal line with a coiled end on the left and a looped end on the right. Below the cable, a dimension line with arrows at both ends indicates a length of 5000 mm.




URANO 150W 4000K

Campanas Led
Ufo bays Led


Indoor



7420 60°




7421 90°




7422 120°

Luminous Intensity Distribution Curve

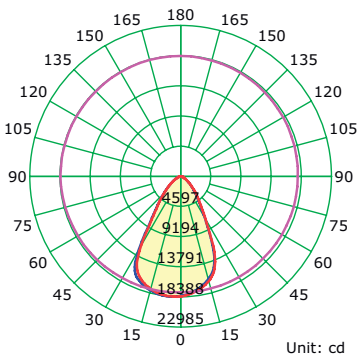


Average Diffuse Angle(50%): 60.4°
— C0-C180 — C90-C270 — G6

Illuminance at a Distance




Luminous Intensity Distribution Curve

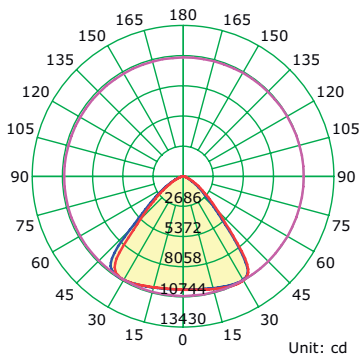


Average Diffuse Angle(50%): 88.4°
— C0-C180 — C90-C270 — G28

Illuminance at a Distance





Luminous Intensity Distribution Curve

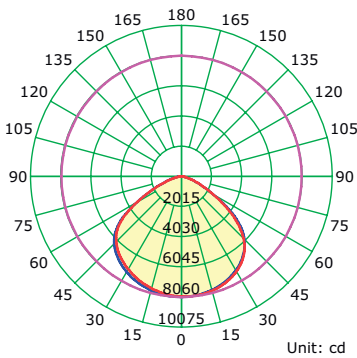

Average Diffuse Angle(50%): 112.0°
— C0-C180 — C90-C270 — G0

Illuminance at a Distance

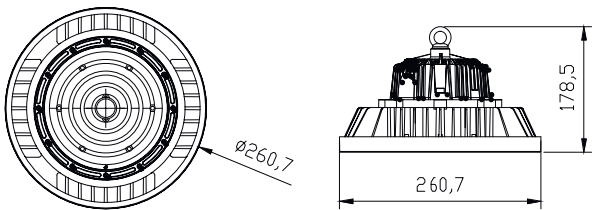

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH
7420	4000K	150W	60°	21000lm	Negro-Black
7421	4000K	150W	90°	21000lm	Negro-Black
7422	4000K	150W	120°	21000lm	Negro-Black
180-260V~ 50/60Hz CRI≥ 80					Aluminio-Aluminium






URANO 150W 5000K

Campanas Led

Ufo bays Led

Indoor

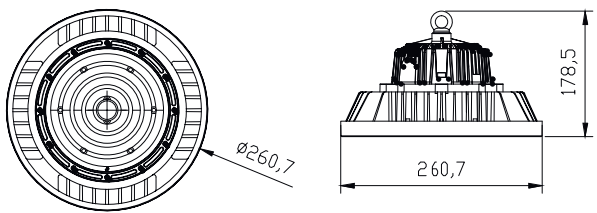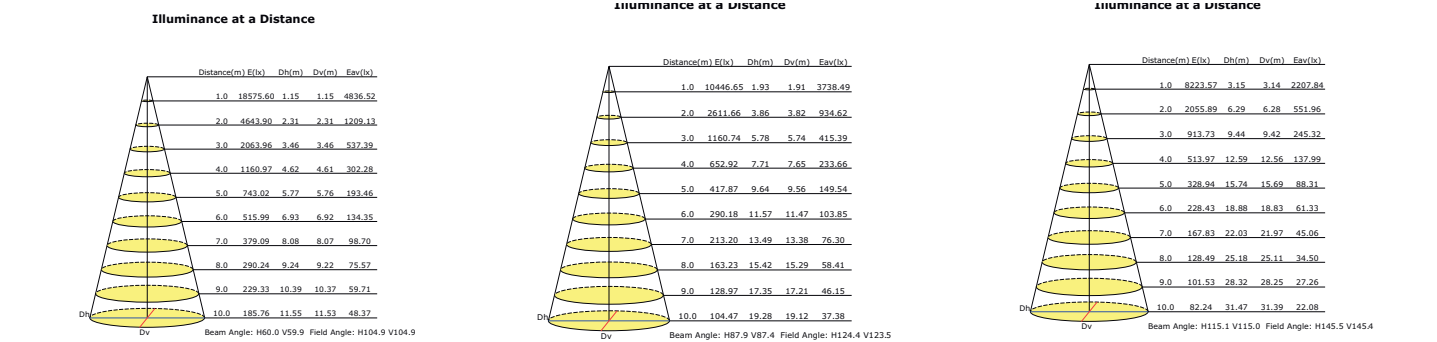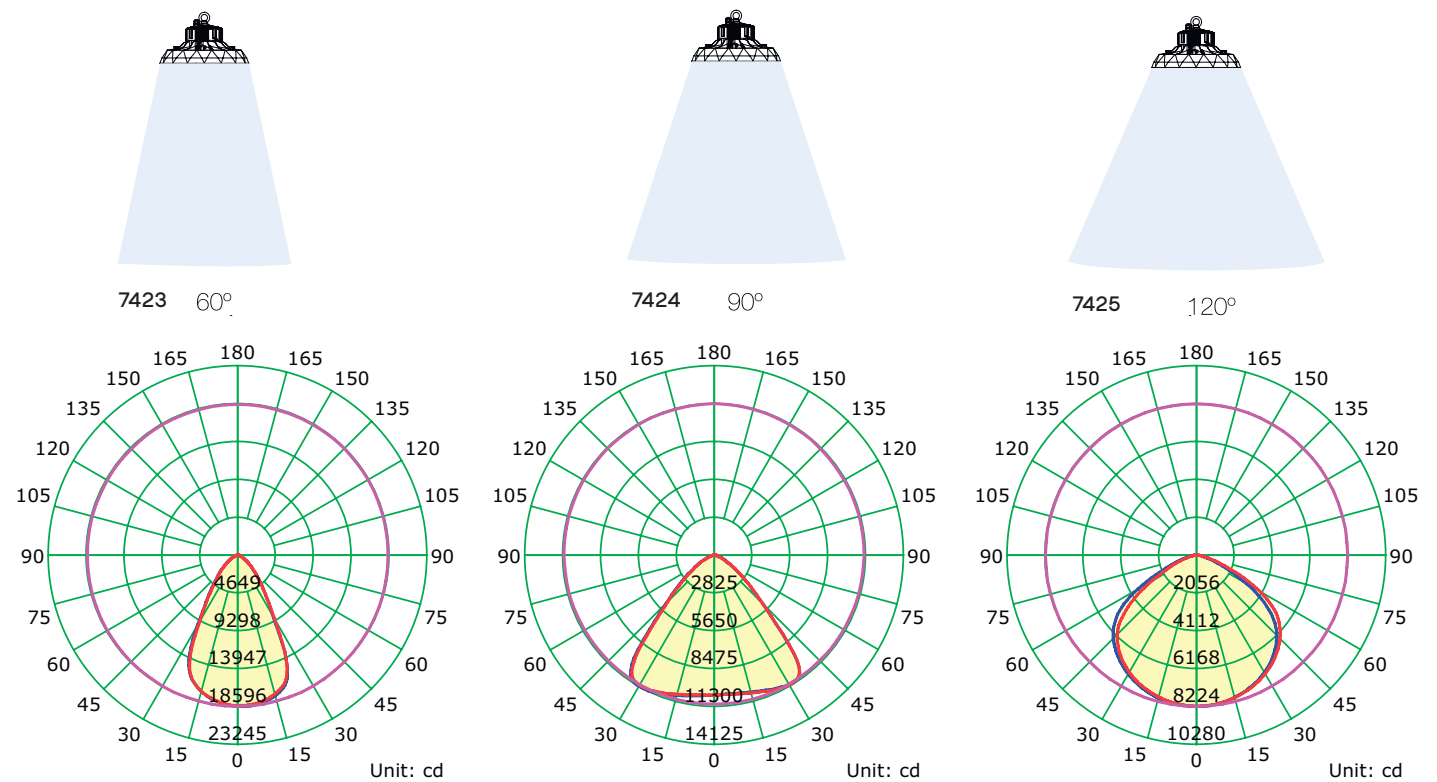


REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH
7423	5000K	150W	60°	22500lm	Negro-Black
7424	5000K	150W	90°	22500lm	Negro-Black
7425	5000K	150W	120°	22500lm	Negro-Black
180-260V~ 50/60Hz CRI≥ 80					Aluminio-Aluminium




URANO 200W 4000K

Campanas Led
Ufo bays Led



7426 60°



Luminous Intensity Distribution Curve

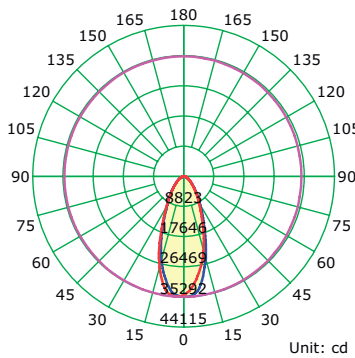

Average Diffuse Angle(50%): 42.0°


— C0-C180 — C90-C270 — G1

Illuminance at a Distance



7427 90°



Luminous Intensity Distribution Curve

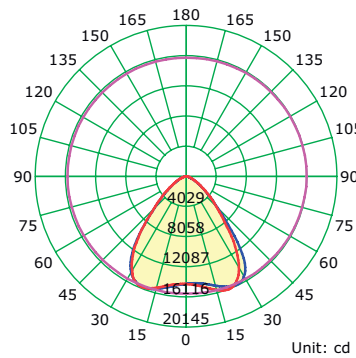

Average Diffuse Angle(50%): 82.8°


— C0-C180 — C90-C270 — G20

Illuminance at a Distance



7428 120°



Luminous Intensity Distribution Curve

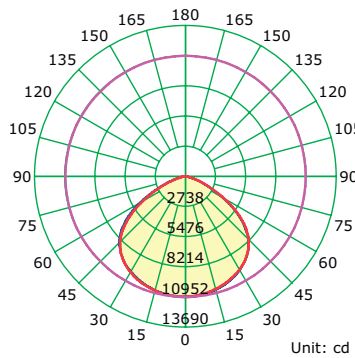

Average Diffuse Angle(50%): 112.9°

— C0-C180 — C90-C270 — G0

Illuminance at a Distance

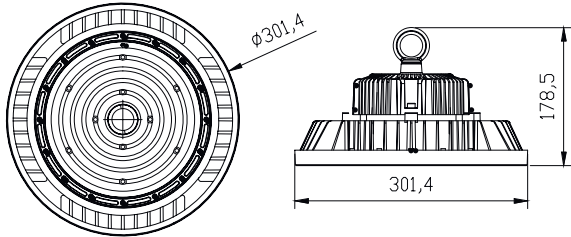


REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH
7426	4000K	200W	60°	28000lm	Negro-Black
7427	4000K	200W	90°	28000lm	Negro-Black
7428	4000K	200W	120°	28000lm	Negro-Black
180-260V~ 50/60Hz CRI≥ 80					Aluminio-Aluminium




URANO 200W 5000K

Campanas Led
Ufo bays Led





7429 60°

Luminous Intensity Distribution Curve

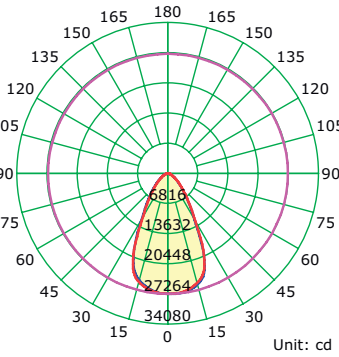


Illuminance at a Distance





7430 90°

Luminous Intensity Distribution Curve

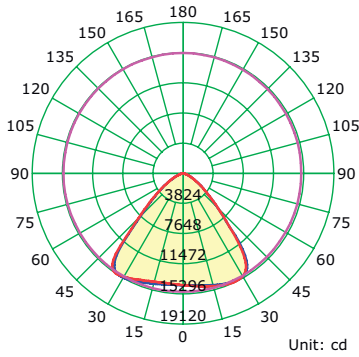


Illuminance at a Distance





7431 120°

Luminous Intensity Distribution Curve

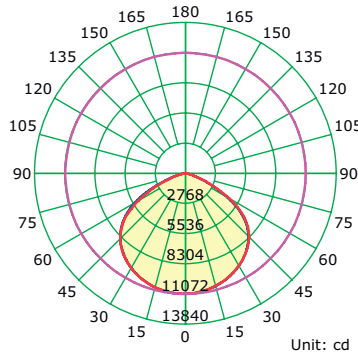

Illuminance at a Distance

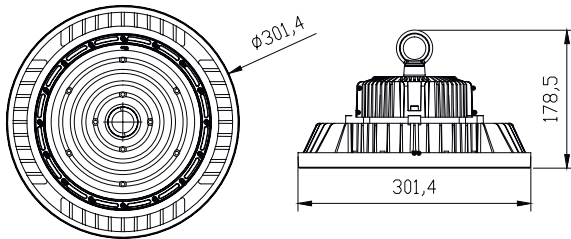

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH
7429	5000K	200W	60°	30000lm	Negro-Black
7430	5000K	200W	90°	30000lm	Negro-Black
7431	5000K	200W	120°	30000lm	Negro-Black
180-260V~ 50/60Hz CRI≥ 80					Aluminio-Aluminium





NOVEDADES 2025



Premis
ADCV
2024

Or

MONKEY FAN
New

Ventilador carril trifásico-Triphasic rail fan

Indoor
by Nacho Timón



Presión breve para encender/apagar el ventilador

*Mantener presionado para sincronizar
(Cuando la alimentación esté encendida, presionar más de 3 segundos.)

Velocidad ventilador +
1/2/3/4

Modo invierno

Velocidad ventilador -
4/3/2/1


Short press to Fan ON/OFF

* Long press to code matching
~(When the power is on, Press it down for more than 3 seconds.)

Fan speed+
1/2/3/4

Reverse (Winter mode)

Fan speed-
4/3/2/1

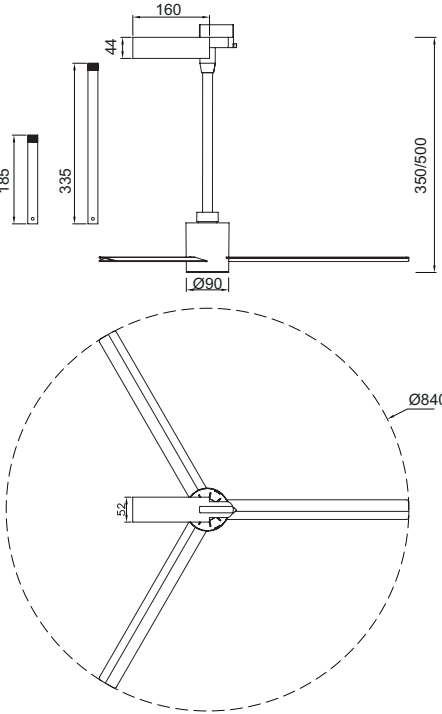


Premio de **ORO**
Categoría **DISEÑO DE PRODUCTO**
Nacho Timón



MONKEY FAN
New

Ventilador carril trifásico-Triphasic rail fan

Indoor
by Nacho Timón

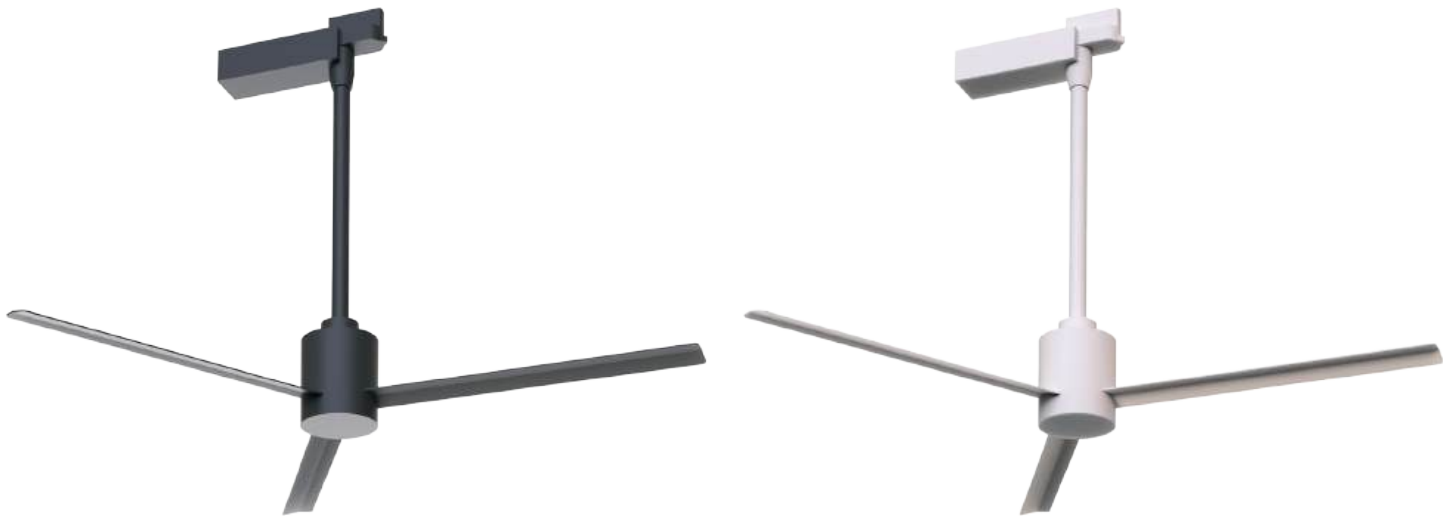

Ref	Finish	Motor
8926	Blanco White	7W
8927	Negro Black	7W
Remote control-RF	220-240V~50/60Hz	ABS/Steel/Aluminium

Velocidad Speeds	1	2	3	4
Potencia Power	3W	4W	5W	7W
RPM	180	200	220	260
Nivel sonoro Sound level (dB(a))	22	28	35	45






DROP
New

Colgante-Pendant lamp

Indoor




Ref	K	Led Watt	Lumens	Finish
8891	3000K	7W	580lm	Negro perla-Black pearl
220-240V~ 50/60Hz CRI:≥ 90				Aluminio-Aluminium



SPLIT
New

Colgante-Pendant lamp

Indoor

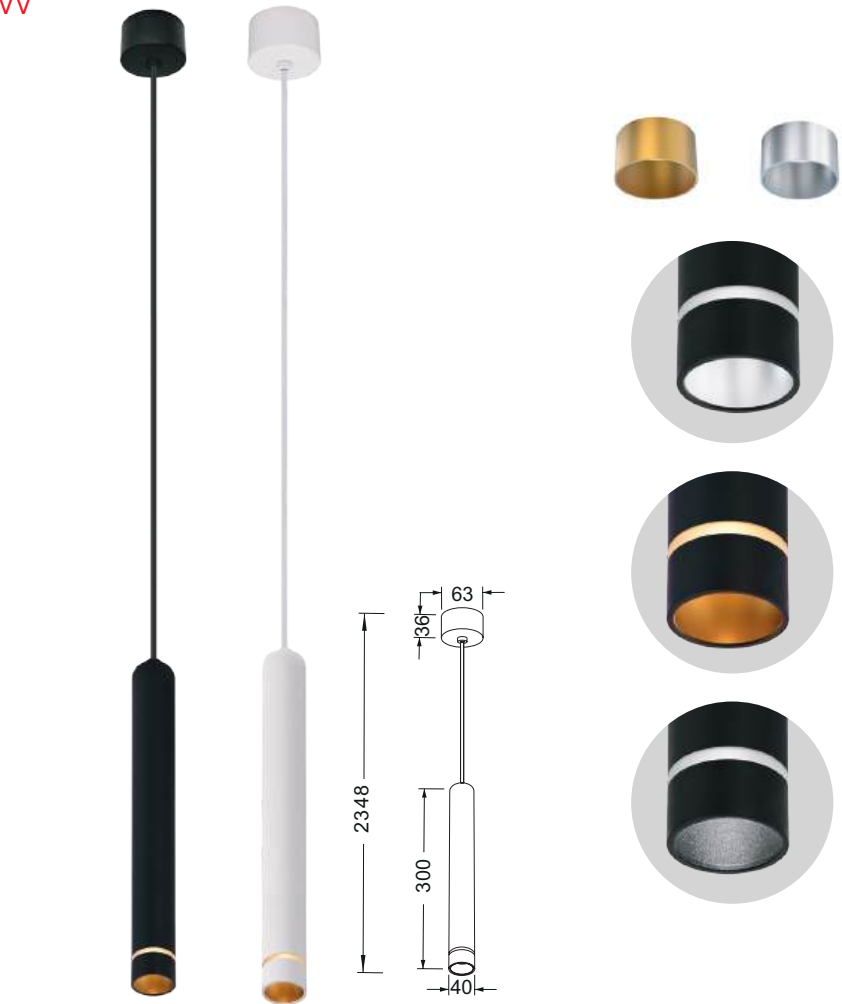


Accesorios incluidos-Accessories included

Plata-Silver

Oro-Gold

Sin accesorio-Whitout accessories


Ref	Bulb (no incl)	Finish
8877	1L x mini GU10	Negro-Black
8878	1L x mini GU10	Blanco-White
máx. 12W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium



Bombillas recomendadas-Suggested bulbs

K	Wat LED	On/Off	Lumens
2700K	4W	R09280	290lm
3000K	4W	R09281	310lm
4000K	4W	R09282	330m



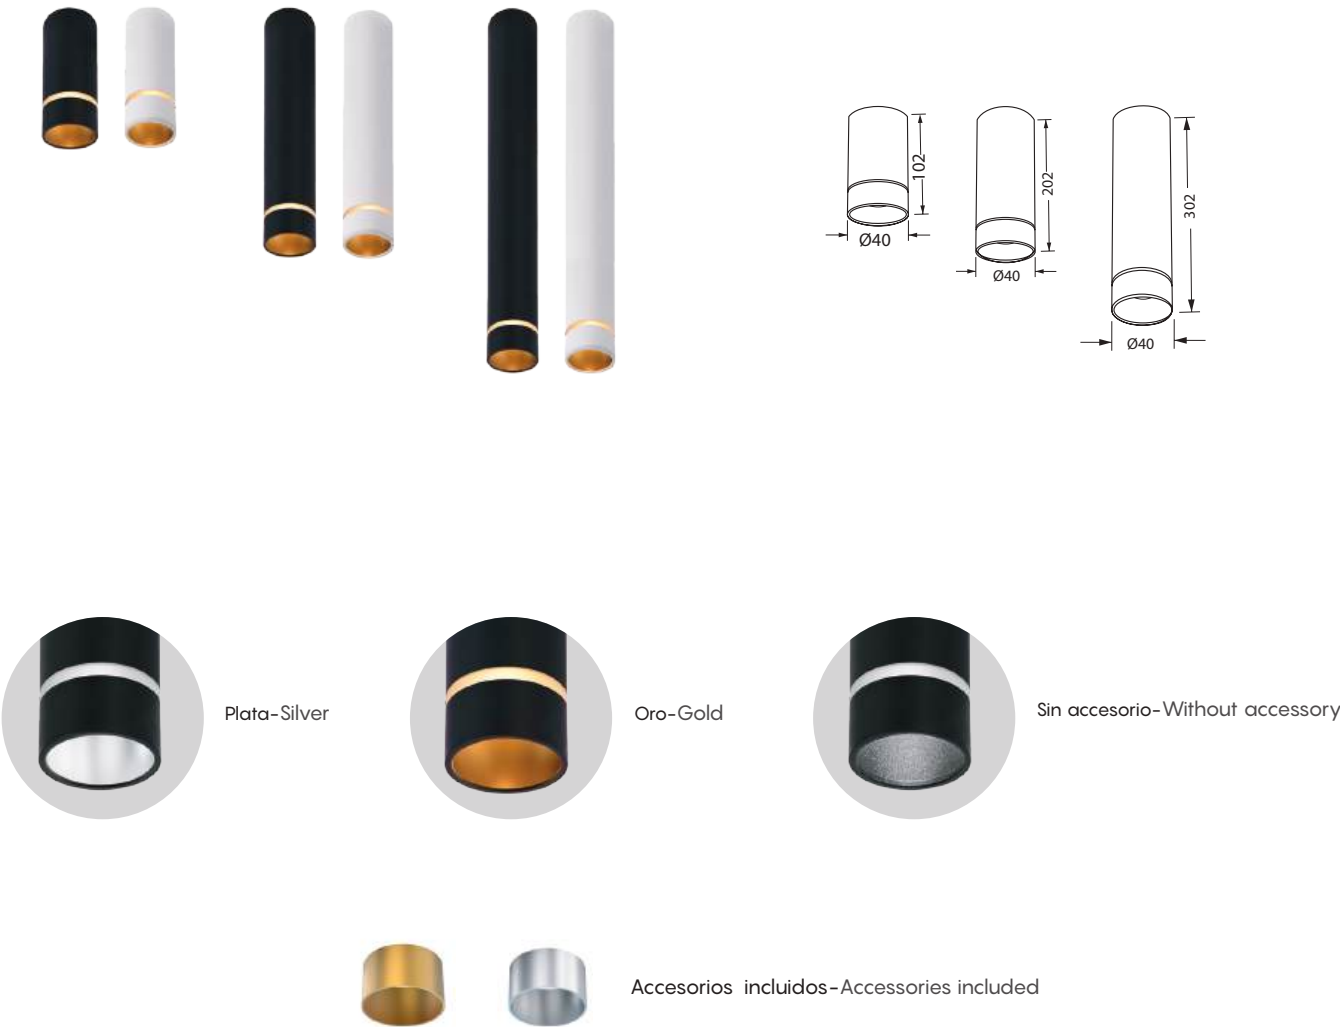


Ref	Bulb (no incl)	Finish	H
8879	1L x mini GU10	Negro-Black	102 mm
8880	1L x mini GU10	Blanco-White	102 mm
8881	1L x mini GU10	Negro-Black	202 mm
8882	1L x mini GU10	Blanco-White	202 mm
8883	1L x mini GU10	Negro-Black	302 mm
8884	1L x mini GU10	Blanco-White	302 mm
máx. 12W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium	



mini GU10		Bombillas recomendadas-Suggested bulbs		
	K	Wat LED	On/Off	Lumens
	2700K	4W	R09280	290lm
	3000K	4W	R09281	310lm
	4000K	4W	R09282	330m






Accesorios incluidos-Accessories included



Plata-Silver



Oro-Gold



Sin accesorio-Whitout accessories

Ref	Bulb (no incl)	Finish
8885	1L x GU10	Negro-Black
8886	1L x GU10	Blanco-White
máx. 12W LED (No incl)		100-240V~50/60Hz Aluminio-Aluminium



Bombillas recomendadas-Suggested bulbs


K	Wat LED	On/Off	Dimmable	Lumens
2700K	7W	R09254	R09257	510lm
3000K	7W	R09255	R09258	540lm
4000K	7W	R09256	R09259	570lm



PUEBLA
New



Colgante-Pendant lamp

Indoor

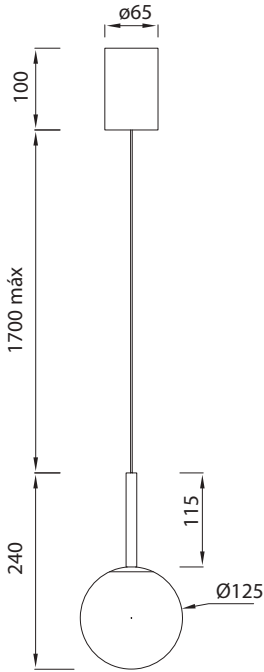



Ref	K	Led Watt	Lumens	Finish
8887	3000K	9W	630lm	Negro-Black
8888	3000K	9W	630lm	Oro satinado-Satin gold
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium



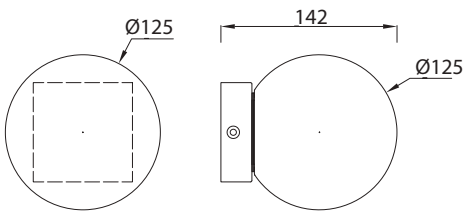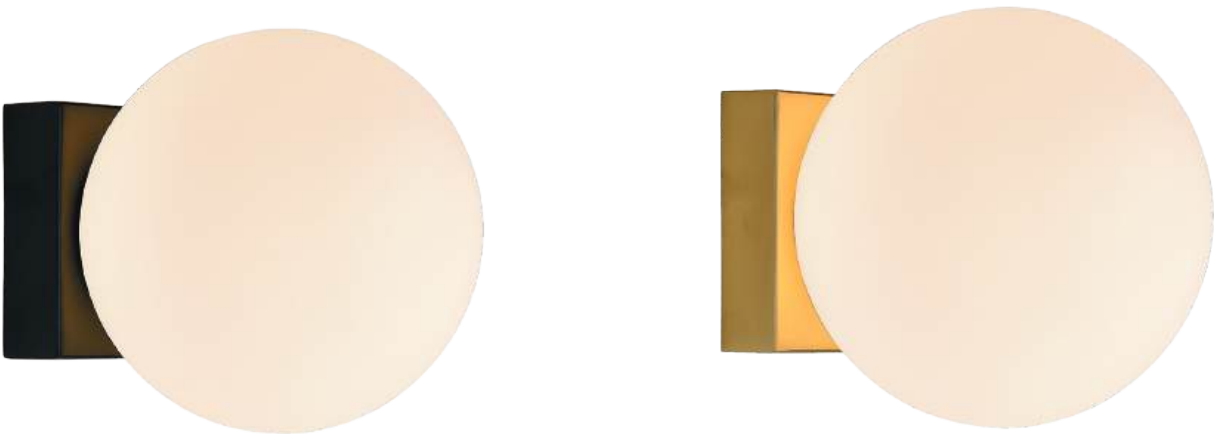




Ref	K	Led Watt	Lumens	Finish
8889	3000K	6W	420lm	Negro-Black
8890	3000K	6W	420lm	Oro satinado-Satin gold
220-240V~ 50/60Hz CRI:≥ 80				Aluminio-Aluminium



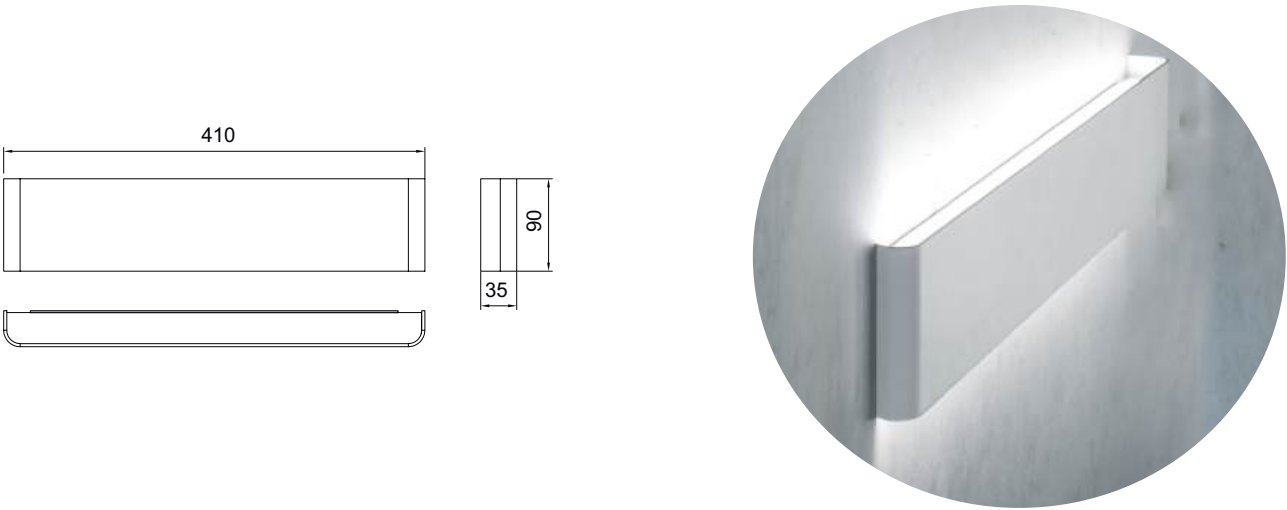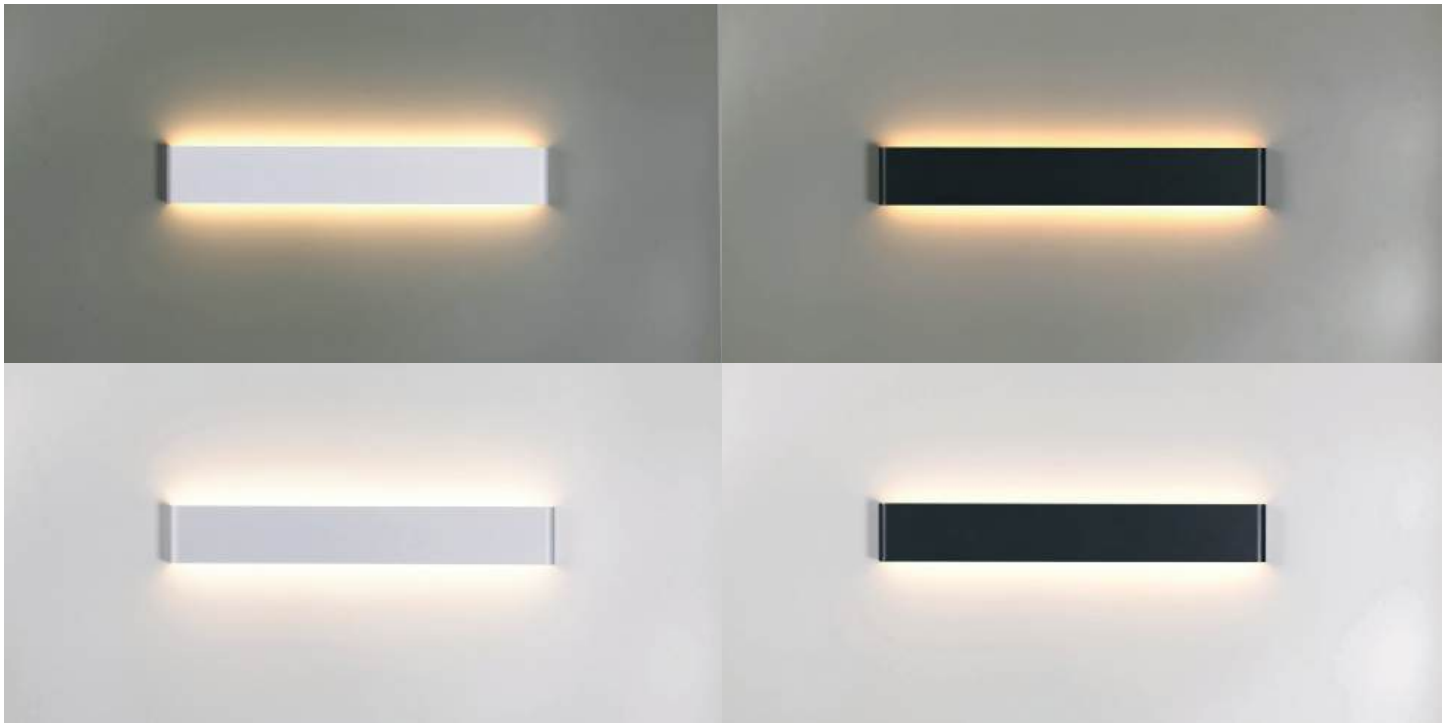




Ref	CCT	Led Watt	Lumens	Finish
8904	3000K	14 W	1150lm	Blanco-White
8905	4000K	14 W	1350lm	Blanco-White
8906	2700K	14 W	1100lm	Negro-Black
8907	3000K	14 W	1100lm	Negro-Black
220-240V~ 50/60Hz CRI:≥ 80			Aluminio/Acrílico-Aluminium/Acrylic	



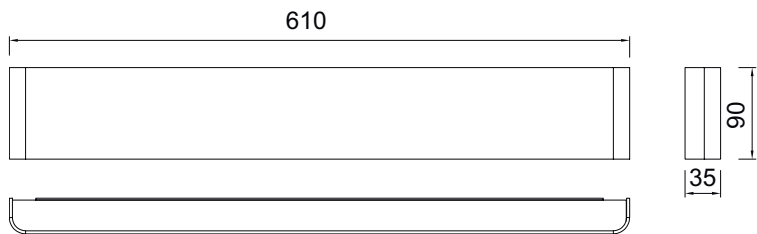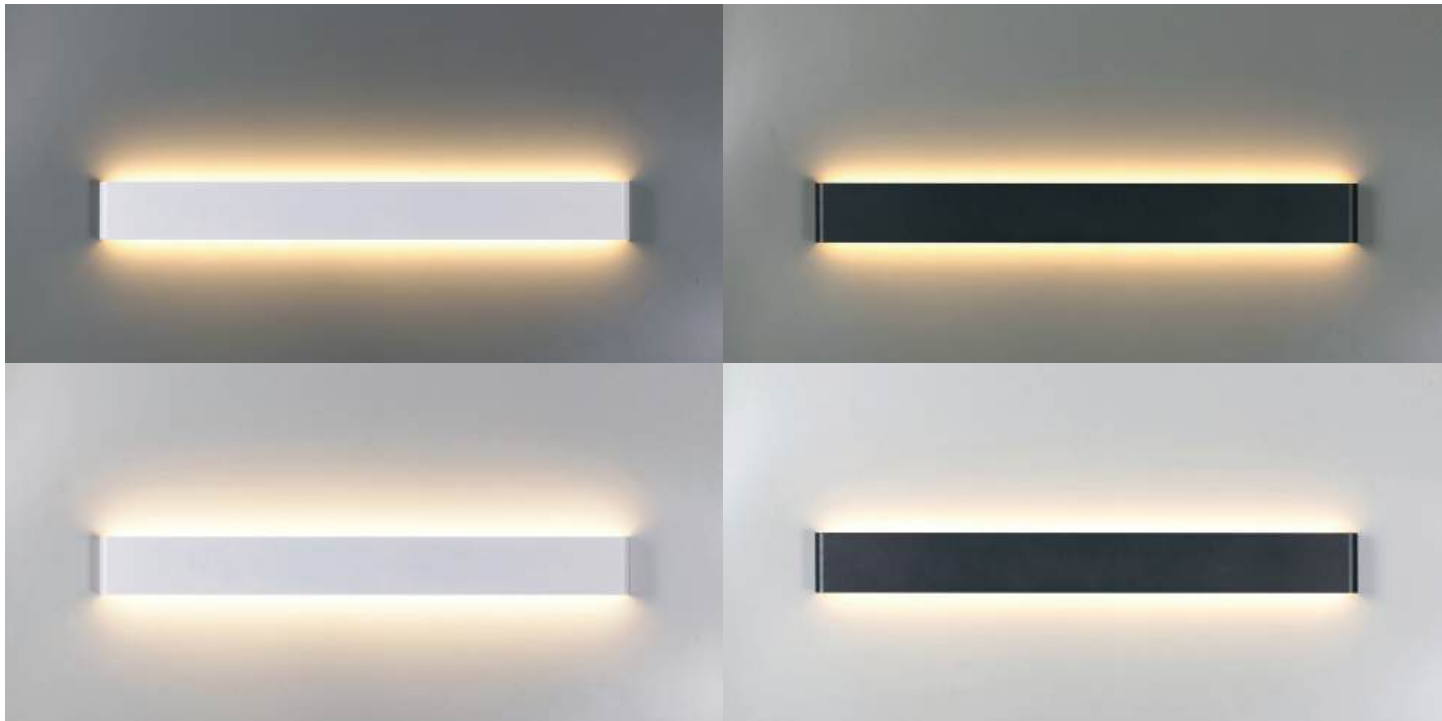

Ref	CCT	Led Watt	Lumens	Finish
8908	3000K	20W	1650lm	Blanco-White
8909	4000K	20W	1900lm	Blanco-White
8910	2700K	20W	1600lm	Negro-Black
8911	3000K	20W	1600lm	Negro-Black
220-240V ~ 50/60Hz CRI: ≥ 80			Aluminio/Acrílico-Aluminium/Acrylic	



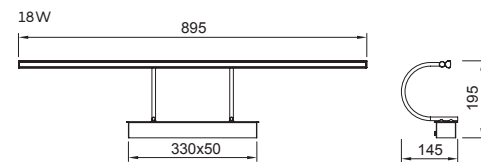

Ref	K	Led Watt	Lumens	Finish
8915	3000K	8W	619lm	Negro-Black
8916	3000K	12W	908lm	Negro-Black
8917	3000K	18W	1257lm	Negro-Black
175-265V~50/60Hz CRI:≥ 80				Aluminio-Aluminium




CUMBUCO II

New

Plafón-Ceiling lamp

Indoor

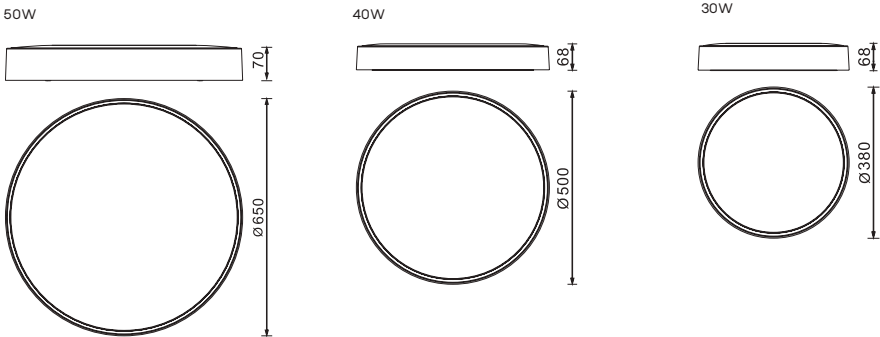

Ref	CCT switch	Led Watt	Lumens	Finish	Dimmable	CUT PHASE
8835	2700K-3300K-4000K	30W	2200lm	Blanco-White	Dimmable	CUT PHASE
8836	2700K-3300K-4000K	30W	2200lm	Negro-Black	Dimmable	CUT PHASE
8837	2700K-3300K-4000 K	30W	2200lm	Madera-Wood	Dimmable	CUT PHASE
8838	2700K-3300K-4000K	40W	2800lm	Blanco-White	Dimmable	CUT PHASE
8839	2700K-3300K-4000K	40W	2800lm	Negro-Black	Dimmable	CUT PHASE
8840	2700K-3300K-4000K	40W	2800lm	Madera-Wood	Dimmable	CUT PHASE
8841	2700K-3300K-4000K	50W	3200lm	Blanco-White	Dimmable	CUT PHASE
8842	2700K-3300K-4000K	50W	3200lm	Negro-Black	Dimmable	CUT PHASE
8843	2700K-3300K-4000K	50W	3200lm	Madera-Wood	Dimmable	CUT PHASE
220-240V~ 50/60Hz CRI:≥ 80			Aluminio/Acrílico-Aluminium/Acrylic			



White-Black - Wood

CCT switch 2700K-3300K-4000K



MAGNETO 48V
New




Ref	K	Led Watt	Beam angle	Lumens	Finish		
8993	2700K	7W	38°	540lm	Negro-Black	Dimmable	
8994	2700K	7W	38°	540lm	Negro oro-Gold black	Dimmable	
48V CRI≥ 90					Aluminio-Aluminium		



MAGNETO 48V
New




Ref	K	Led Watt	Beam angle	Lumens	Finish		
8997	2700K	5W	38°	390lm	Negro-Black	Dimmable	
8998	2700K	7W	38°	550lm	Negro oro-Gold black	Dimmable	
48V CRI≥ 90				Aluminio-Aluminium			

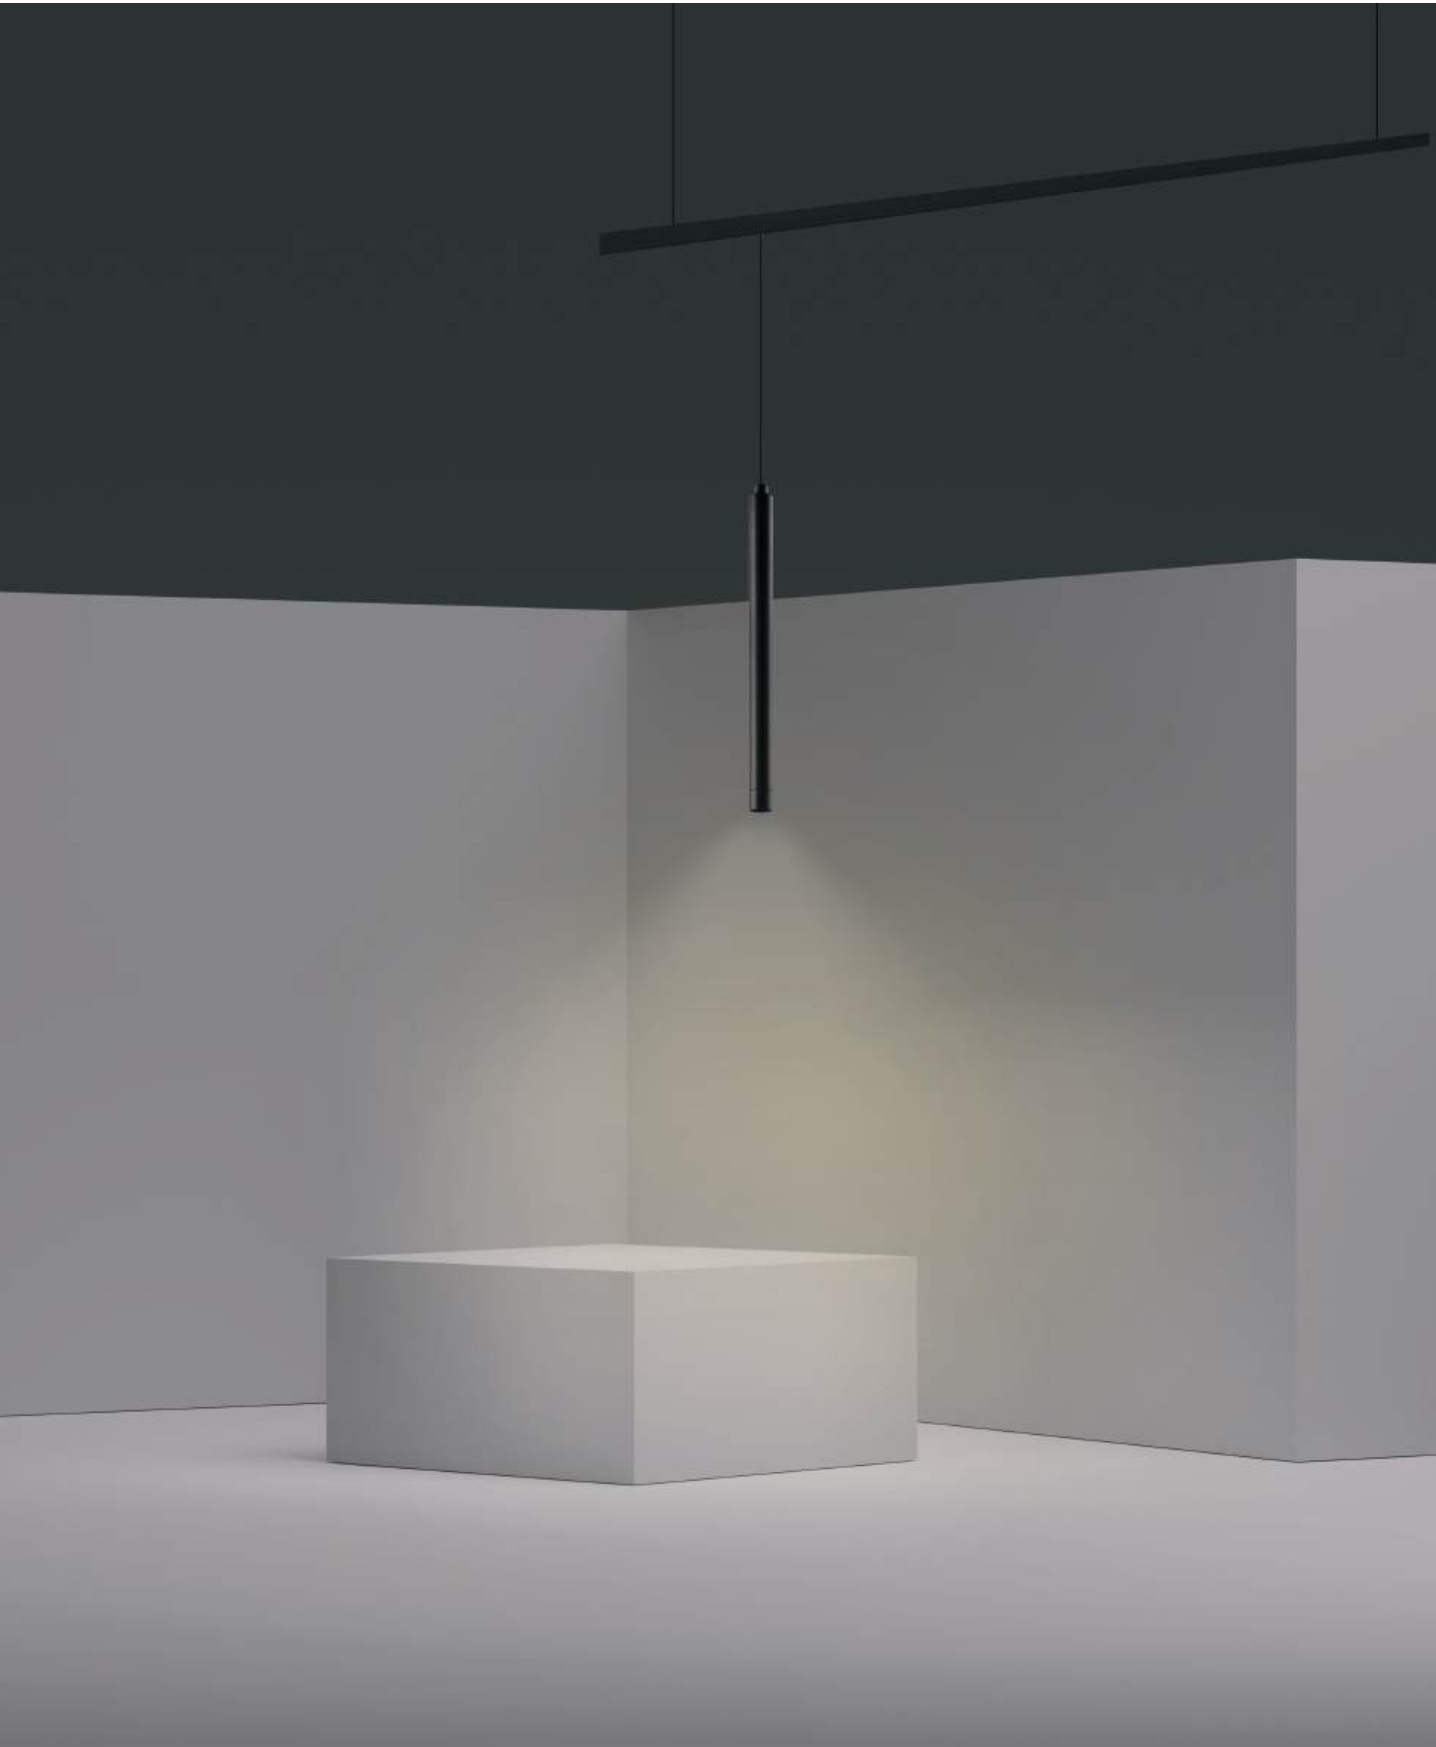




Ref	K	Led Watt	BEAM ANGLE	Lumens	Finish		
8989	2700K	7W	38°	540lm	Negro-Black	Dimmable	
8990	2700K	7W	38°	540lm	Negro oro-Gold black	Dimmable	
8995	2700K	7W	38°	540lm	Negro-Black	Dimmable	
8996	2700K	7W	38°	540lm	Negro oro-Gold black	Dimmable	
48V CRI≥ 90					Aluminio-Aluminium		

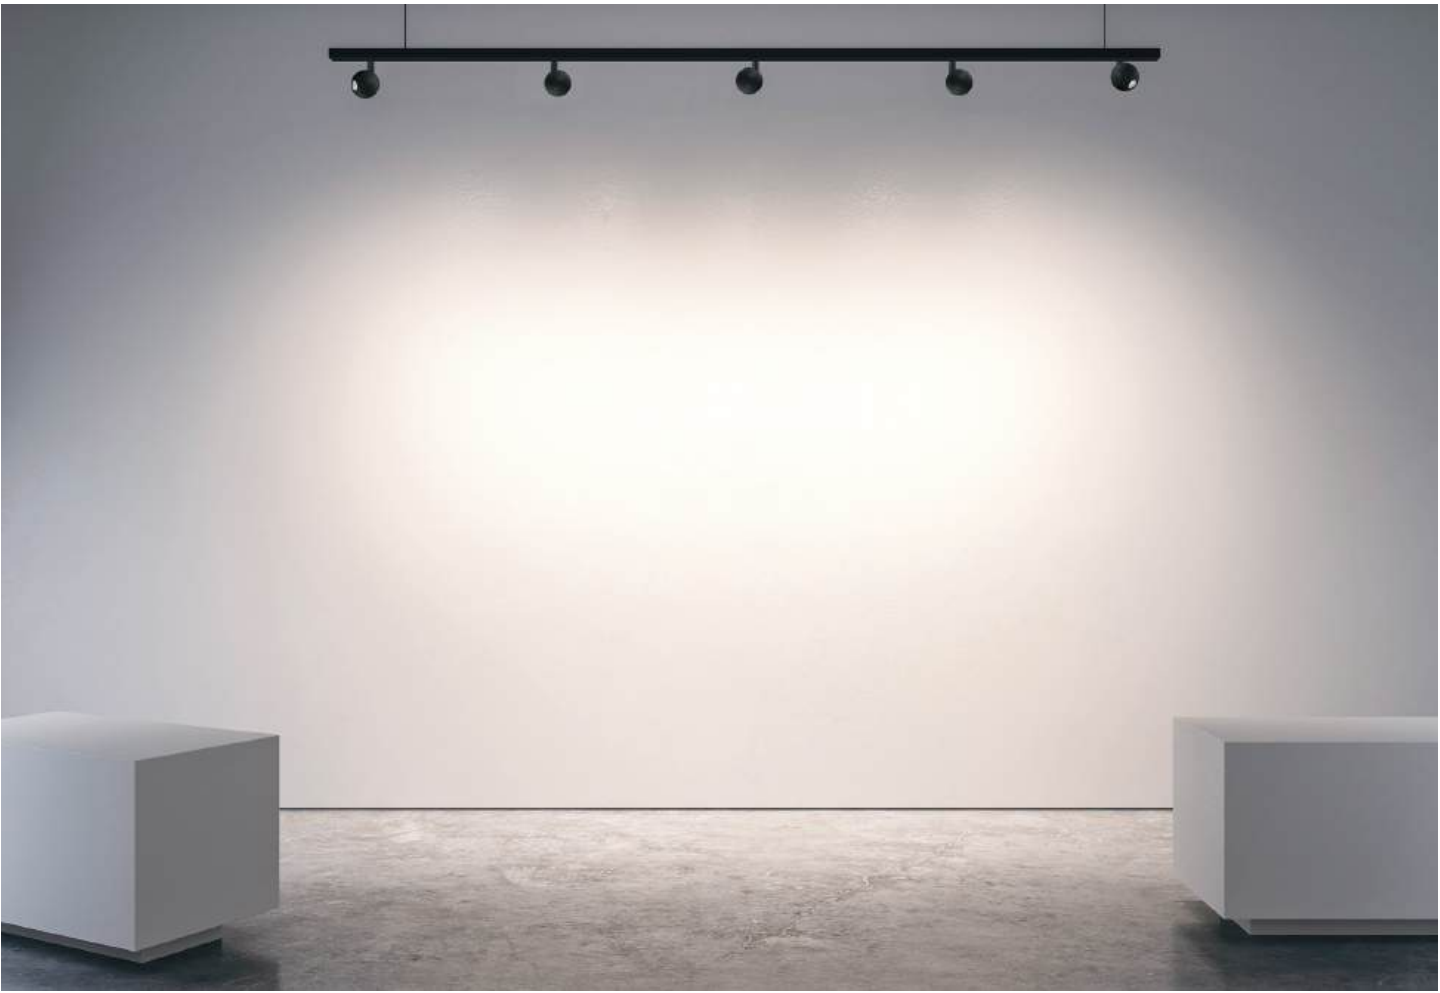

MAGNETO 48V
New


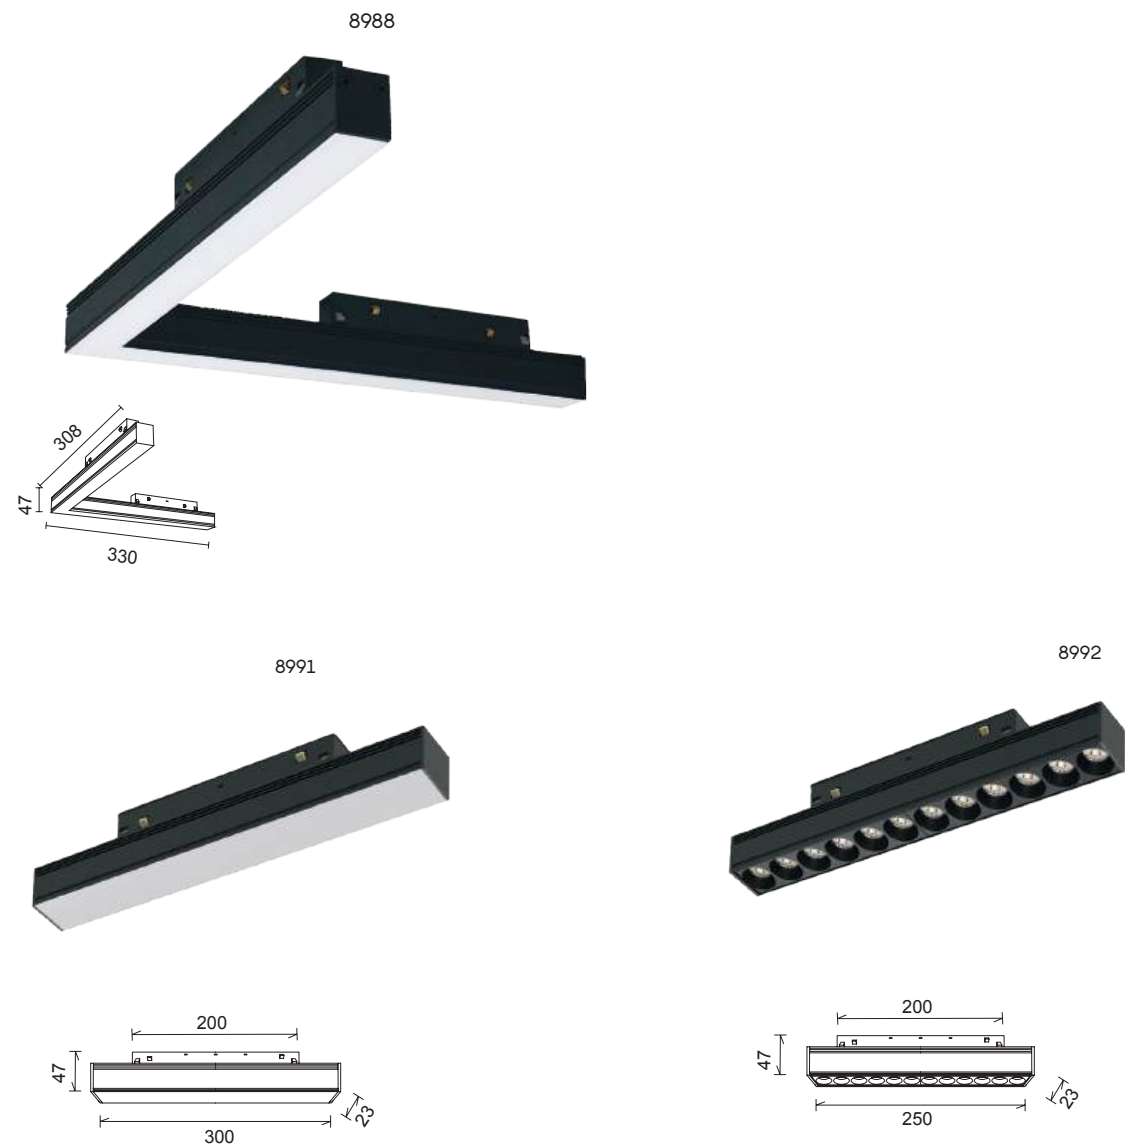


Ref	K	Led Watt	Beam angle	Lumens	Finish	
8988	4000K	16W	120°	1350lm	Negro-Black	On-off
8991	2700K	8W	120°	630lm	Negro-Black	Dimmable
8992	2700K	12W	50°	940lm	Negro-Black	Dimmable
48V CRI≥ 90					Aluminio-Aluminium	





TRACK ACCESSORIES



9018 Conexión SUP. en T-Negro/Black T-Joint plates incl.



9019 Conexión SUP. en T-Negro/Black T-Joint plates incl.




9020 Conexión EMPOTRAR. en T-Negro/Black T-Joint plates incl.

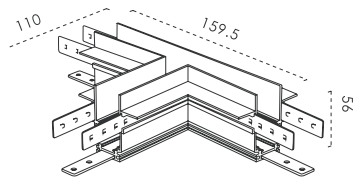



TRACK ACCESSORIES

9021 Modulo conexión en T / T-connection module

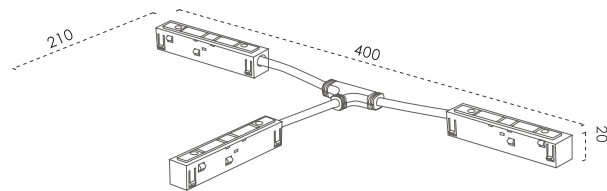



Ref	Bulb (no incl)	Finish
8873	1L x mini GU10	Blanco-White
8874	1L x mini GU10	Negro-Black
8875	1L x mini GU10	Níquel satinado-Satin nickel
8876	1L x mini GU10	Cuero-Antique brass
máx. 12W LED (No incl)		100-240V ~50/60Hz Aluminio-Aluminium




mini GU10		Bombillas recomendadas-Suggested bulbs		
K	Wat LED	On/Off	Lumens	
2700K	4W	R09280	290lm	
3000K	4W	R09281	310lm	
4000K	4W	R09282	330m	



TARIFA III
New


Aplique lector-Wall lamp reader

Indoor

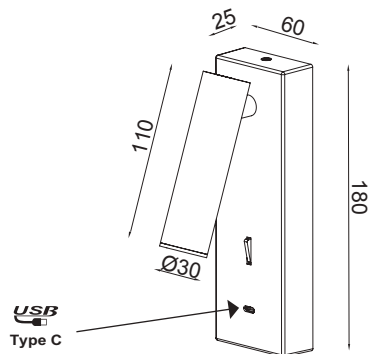


Ref	K	Led Watt	Lumens	Finish
8984	3000K	3W	210lm	Blanco mate-Matt white
8985	3000K	3W	210lm	Negro mate-Matt black
8986	3000K	3W	210lm	Níquel satinado-Satin nickel
8987	3000K	3W	210lm	Cuero-Antique brass
220-240V - 50/60Hz CRI:≥ 80				Aluminio-Aluminium



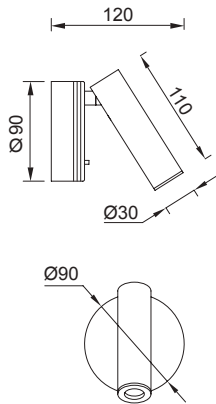

Ref	K	Led Watt	Lumens	Finish
8834	3000K	3W	210lm	Negro-Black
		100-240V~50/60Hz CRI:≥ 80	Aluminio-Aluminium	



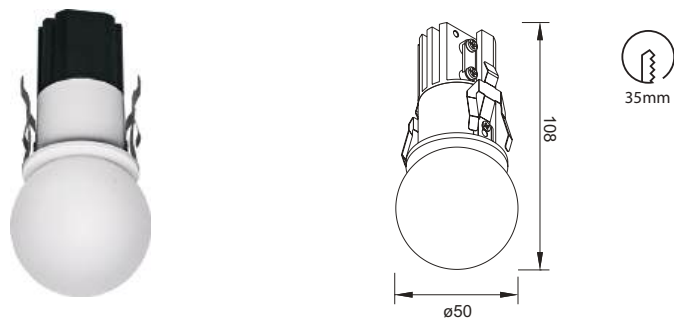


Ref	CCT	Led Watt	Lumens	Finish
8892	2700K	7W	610lm	Blanco-White
8893	3000K	7W	660lm	Blanco-White
8894	4000K	7W	700lm	Blanco-White
220-240V~ 50/60Hz CRI:≥ 80				Aluminio/Acrílico-Aluminium/Acrylic





Ref	CCT switch	Led Watt	Lumens	Finish
8848	2700K-3000K-4000K	6'5W	630lm	Blanco-White
8849	2700K-3000K-4000K	10W	1000lm	Blanco-White
220-240V~ 50/60Hz CRI:≥ 80				Aluminio/PC-Aluminium/PC







60s

Ref	CCT switch	Led Watt	Lumens	Finish	Sensor
8850	2700K-3000K-4000K	8 W	720lm	Blanco-White	PIR
220-240V ~ 50/60Hz CRI:≥ 80		Aluminio/PC-Aluminium/PC			


Área iluminada

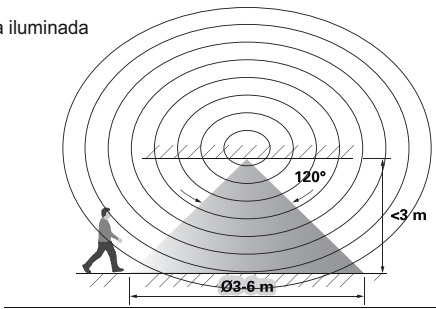

Sensibilidad

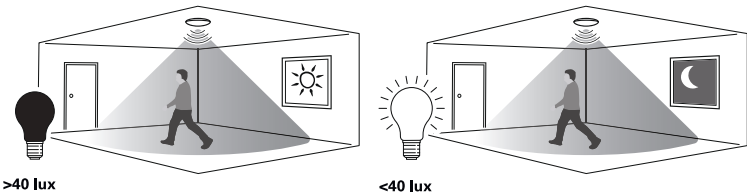

Duración

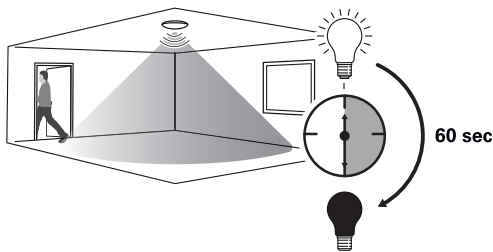

Zona de activación

