

MANUALE D'ISTRUZIONE

INSTRUCTIONS MANUAL



COBALTAX TOOLS, S.L.

TEL. 93 783 82 47

FAX 93 784 81 01



cobaltax@cobaltax.com

ELETTROPOMPA AUTOADESCANTE BISENSO

Tipo: G20 – G25 – G30


BIDIRECTIONAL SELFPRIMING ELECTROPUMP

Type: G20 – G25 – G30



Dimensioni Ingombro - Overall dimensions - Tamaño y estorbo

Mod.	S 20	S 25	S 30
A (mm)	160	160	180
B (mm)	230	230	250
H (mm)	180	180	200

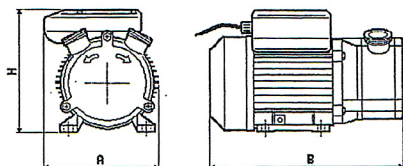

Dati tecnici - Technical specifications - Datos técnicos

Modello - Model - Modelo:	-	S 20	S 25	S 30
Connessione entrata/uscita - Connection income/outcome - Conexión entrada/salida:	-	G 3/4"	G 1"	G 1 1/2"
Portata - Delivery - Capacidad:	l/min	28	40	80
Prevalenza - Lift - Altura:	m	22	27	25
Potenza - Power - Potencia:	Hp	0,5	0,6	1
Giri motore - Revolutions of the engine - Vueltas motor:	r.p.m.	2850	2800	1400
Grado di protezione motore - Protection of the engine - Nivel de protección motor:	-	IP 44	IP 44	IP 44
Tensione di rete (mono) - Net voltage - Tensión de red (mono):	V	230	230	230
Frequenza di rete - Net frequency - Frecuencia de red:	Hz	50	50	50
Condensatore - Condenser - Condensador:	-	10 µF 400 V	10 µF 400 V	10 µF 400 V
Rumorosità - Noise level - Rumorositad:	dB(A)	< 80	< 80	< 80
Temperatura min liquido - Minimal liquid temperature - Temperatura min liquido:	°C	+5°C	+5°C	+5°C
Temperatura max liquido - Maximal liquid temperature - Temperatura máx liquido:	°C	+35°C	+35°C	+35°C
Peso - Weight - Peso:	kg	4,5	5,5	8,5

Parti di ricambio - Spare parts - Repuestos

